


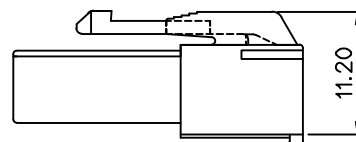
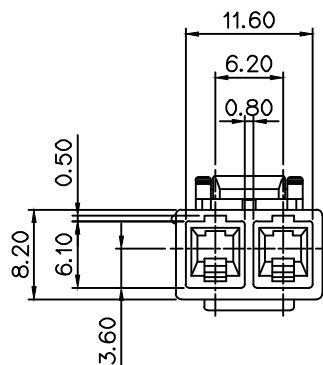


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

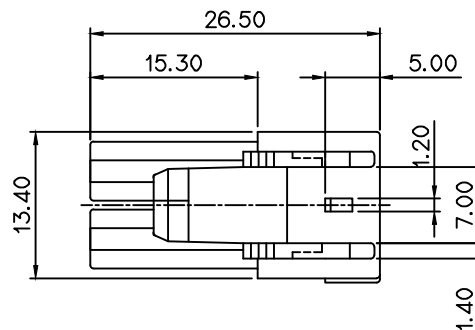

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST730638, 639, 641, 681
- 3.적용 HOUSING : MG620874
- 4.적용 REAR HOLDER : MG630875
- 5.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730638, 639, 641, 681
3. APPLICABLE HOUSING : MG620874
4. APPLICABLE REAR HOLDER : MG630875
5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

ISSUE MARK

						MATERIAL	PBT(V0)	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
						FINISH	NATURAL	
						WIRE RANGE	AWG(#22~#12)	CLASS
						INSULATION		TYPE
△	설계시양변형서"SH0128"	근거 도면 재작성				'11.04.28		
△	설계시양변형서"SO50150"	근거 수정				'05.07.01		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1
DR.	KO 95.07.03		CHK.	Sik	95.07.03		PART NAME	PART NO. △MG 610873P
CHK.			APP.	S. w	7/18			
							EDL-2P PLUG HS'G	