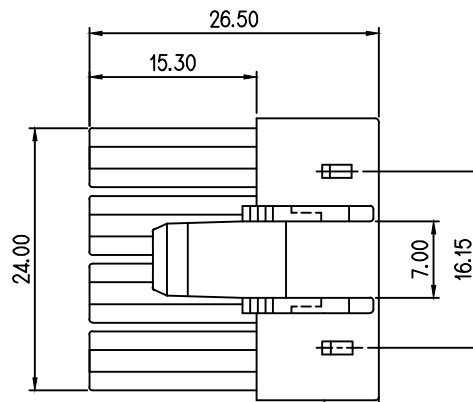
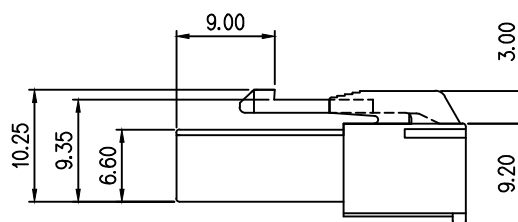
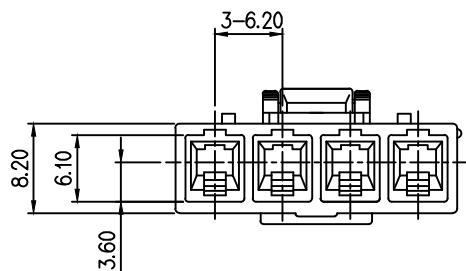


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST730638, 639, 641, 681
- 3.적용 HOUSING : MG620980
- 4.적용 REAR HOLDER : MG630986
- 5.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730638, 639, 641, 681
3. APPLICABLE HOUSING : MG620980
4. APPLICABLE REAR HOLDER : MG630986
5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

ISSUE MARK

					MATERIAL	PBT(V0)	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH	NATLURAL	
					WIRE RANGE	CLASS	
					INSULATION	TYPE	
△	설계시양변경서 "S110428" 근거 도면 제작성				"11.04.28		
△	설계시양변경서 "S050150" 근거 수정				"05.07.01		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	PART NO.
DR.	KO 95.10.07	CHK.	Sik	95.10.07		SCALE 2/1	MG 610979
CHK.	12/26	APP.	S. w	12/27	PART NAME	3220 (EDL)-4P PLUG HS'G	