


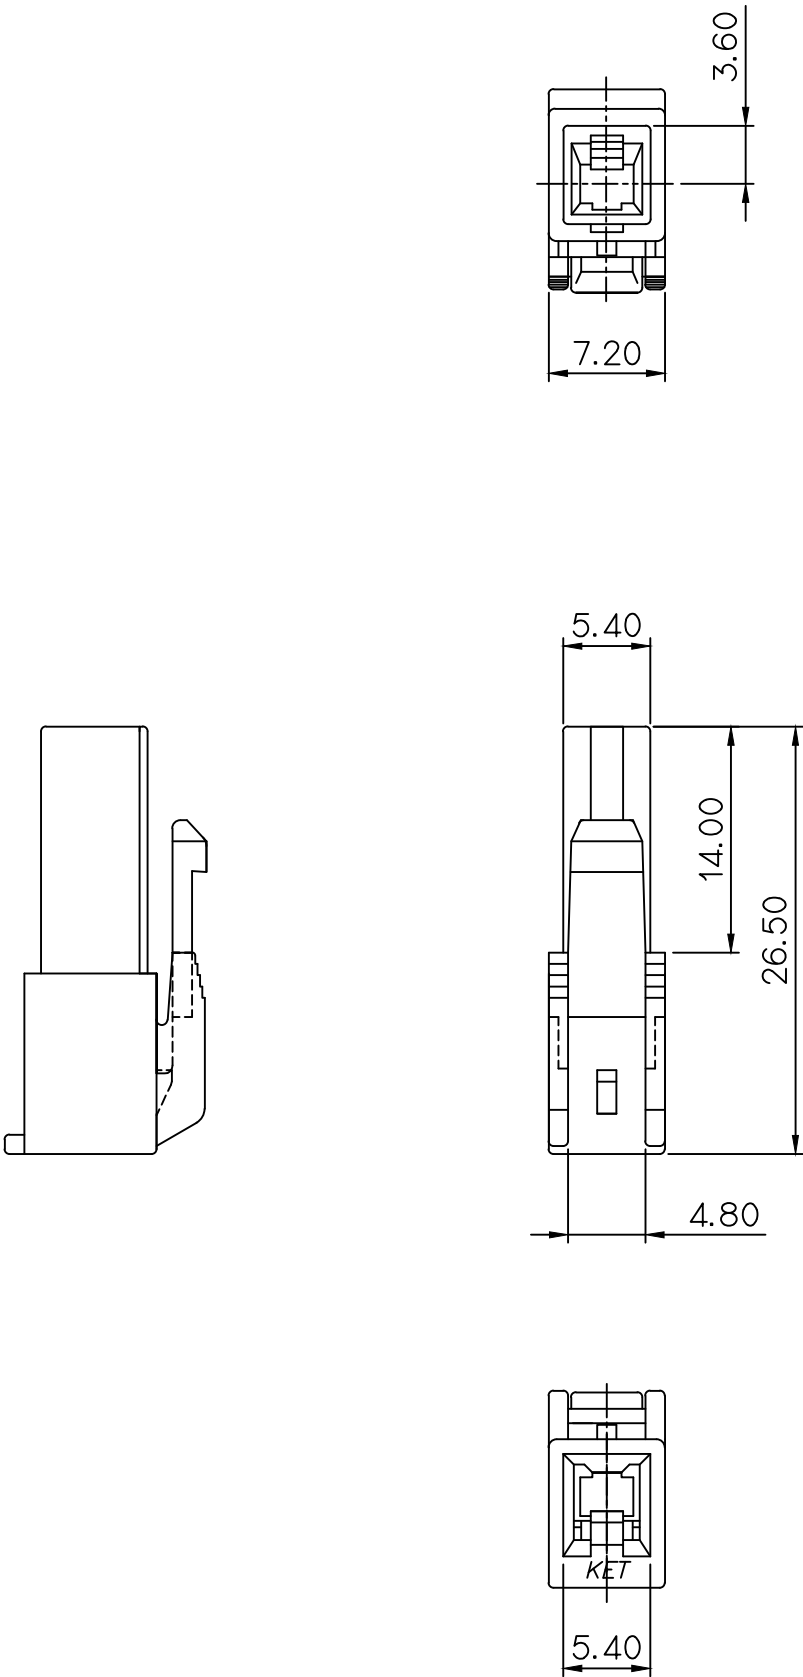

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

- 1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST730638, 639, 641, 681
- 3.적용 HOUSING : MG620982
- 4.적용 REAR HOLDER : MG630989
- 5.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

- 1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE TERMINAL : ST730638, 639, 641, 681
- 3. APPLICABLE HOUSING : MG620982
- 4. APPLICABLE REAR HOLDER : MG630989
- 5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

						MATERIAL	PBT(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	NATLURAL			
						WIRE RANGE	CLASS			
						INSULATION	TYPE			
①	설계사양변경"S110128" 근거 도면 재작성		LCM	KSH	정원	'11.04.28				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	PART NO.
	DR. KO 95.10.08		CHK. Sik		95.10.09				2/1	MG 610981
CHK. M K 12/26		APP. Wafuk		12/27		PART NAME 3220 (EDL)-1P PLUG HS'G				

ISSUE MARK	