
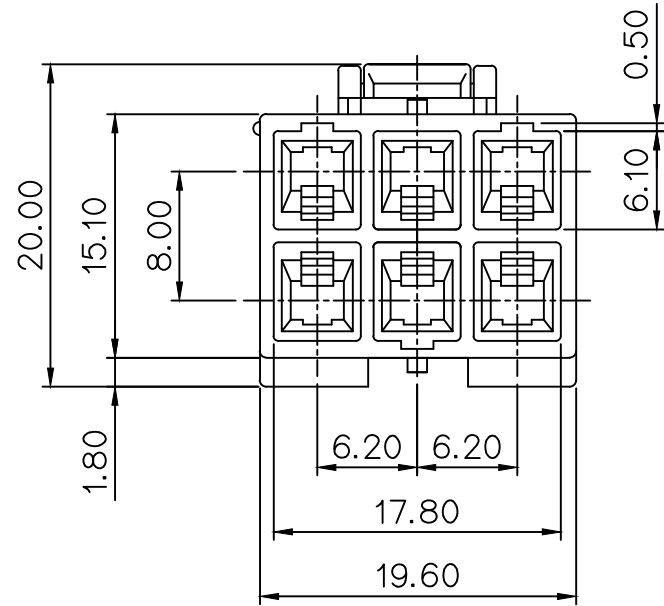
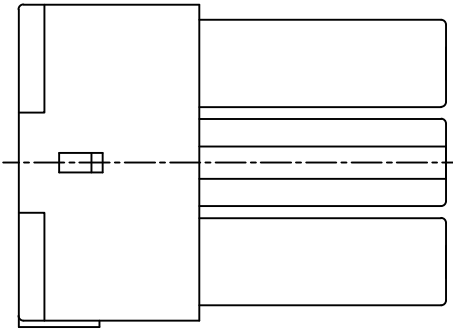
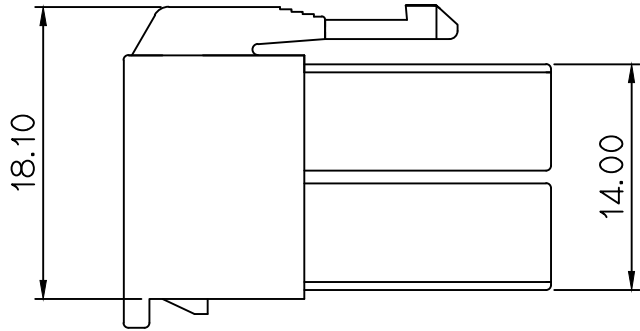
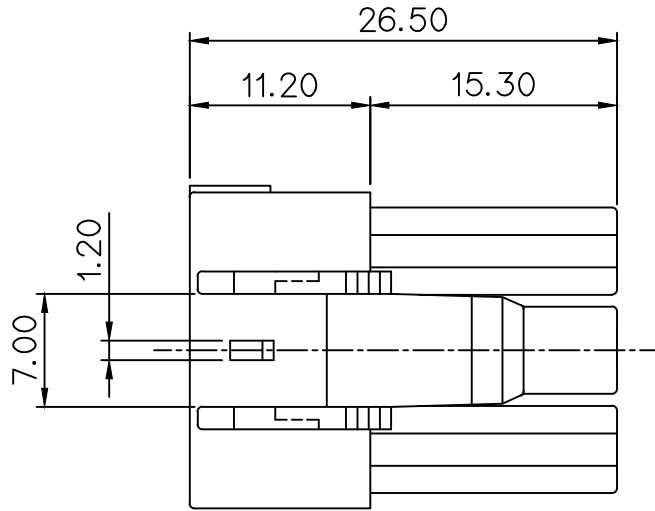


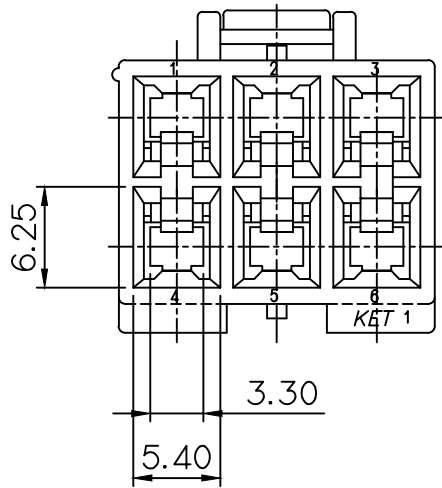

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST730641, 638, 639, 681
- 3.적용 HOUSING : MG620994
- 4.적용 REAR HOLDER : MG630878
- 5.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730641, 638, 639, 681
3. APPLICABLE HOUSING : MG620994
4. APPLICABLE REAR HOLDER : MG630878
5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

						MATERIAL PBT(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH NATLURAL			
						WIRE RANGE			CLASS
						INSULATION			TYPE
①	설계사양변경"SI10128"근거 도면 재작성	LCM	KSH	7/28	'11.04.28				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG 610993	
DR. KO 96.12.10		CHK.	12/11						
CHK. 12/11		APP.	12/12	3220 6P PLUG HS'G					

ISSUE MARK