
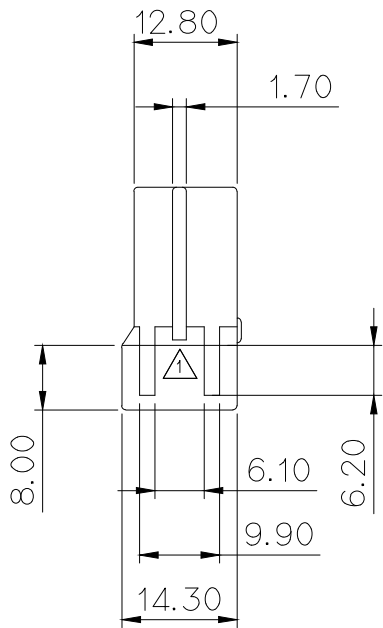


NO.	METERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK
6		W/GREEN
7		BROWN
* 8		GREEN

”*”는 현재 사용중인 COLOR임.

주 기



1. 적용 TERMINAL:ST730497, ST740498
2. 적용 HOUSING P/NO: MG621121
3. 적용 HOUSING P/NO: MG631122
- 4.제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

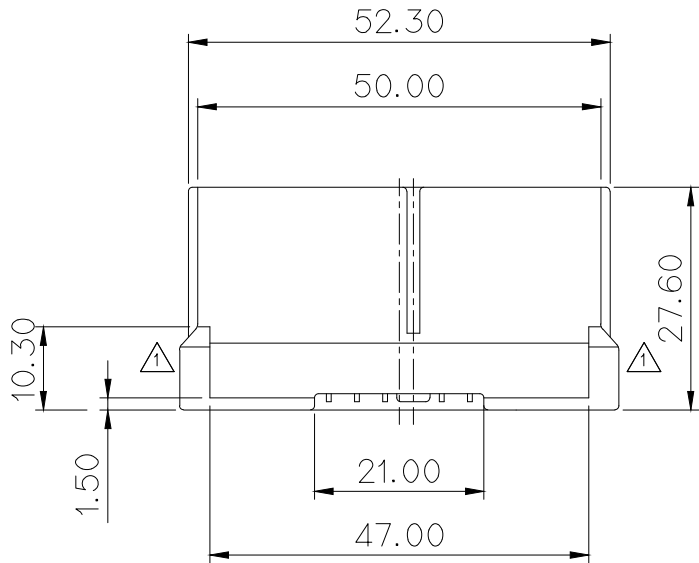

NOTE

1. APPLICABLE TERMINAL:ST730497, ST740498
2. APPLICABLE HOUSING P/NO: MG621121
3. APPLICABLE HOUSING P/NO: MG631122
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

GENERAL TOLERANCE (HOUSING)									USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.9	±1.4	±30’	

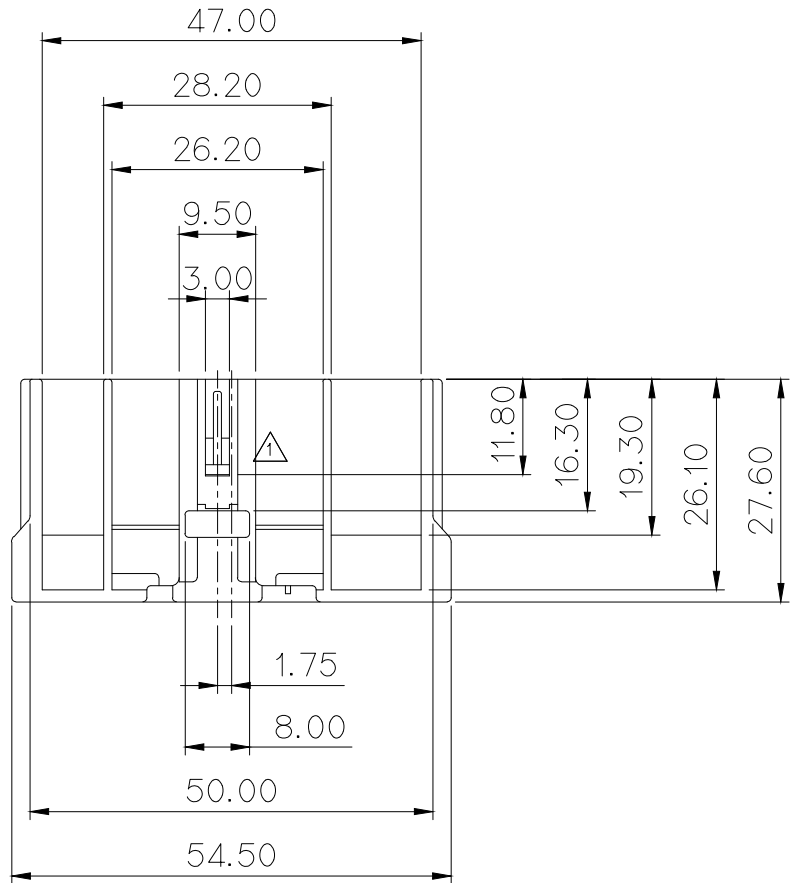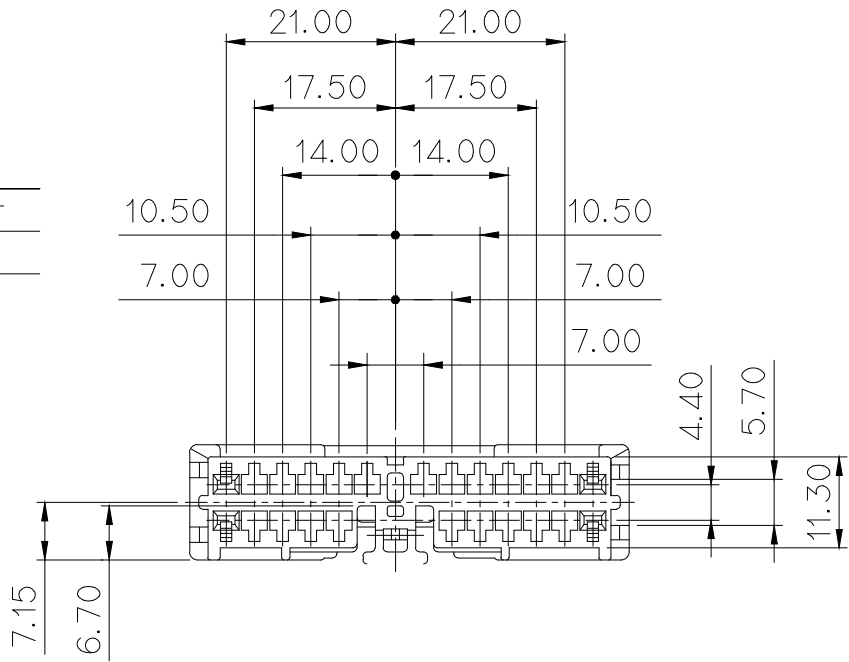

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL		PBT	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		GREEN		
					WIRE RANGE		CLASS		
					INSULATION		TYPE		
	치수 형상 변경 (시변 970093)		WK	KKJ	'97.12.08				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED ±0.2		SCALE 1/1
DR.		JANG	96.11.21	CHK.		PART NO. MG611120			
CHK.				APP. Watanabe		9.15	SDI II 24P PLUG HOUSING		