
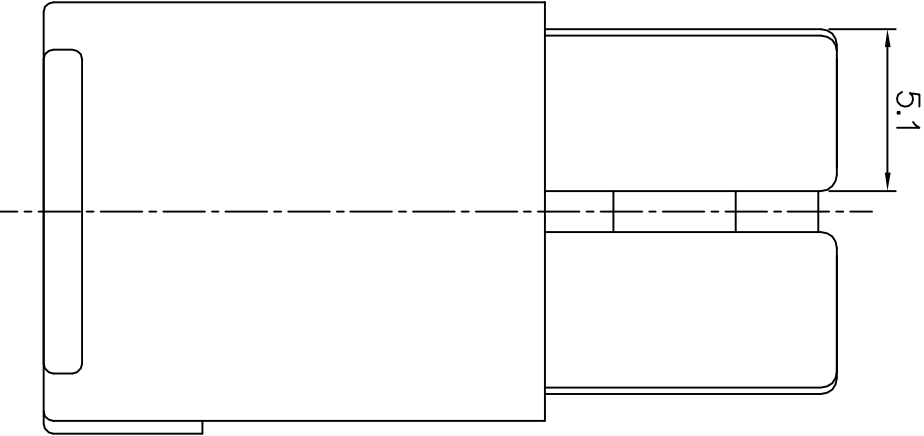
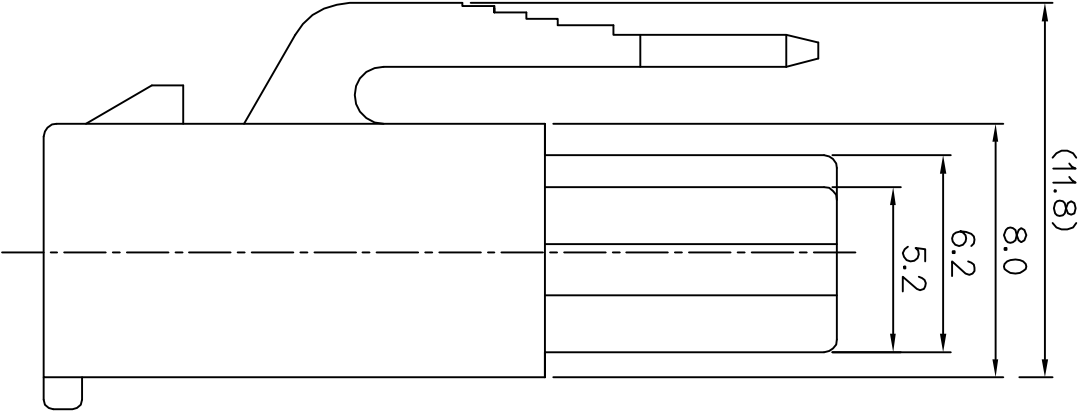


| GENERAL TOLERANCE (HOUSING) |       |        |        |       |       | USED ON |
|-----------------------------|-------|--------|--------|-------|-------|---------|
| 10MAX                       | 50MAX | 100MAX | 250MAX | 250VR | ANGLE | ECCENT  |
| ±0.2                        | ±0.3  | ±0.55  | ±0.95  | ±1.4  | ±30'  | 0.1     |

NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE
- AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST73694,695,696,697,872-3
3. APPLICABLE HS'G,R/HOLDER : MG621164,621173,MG631165
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION. PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

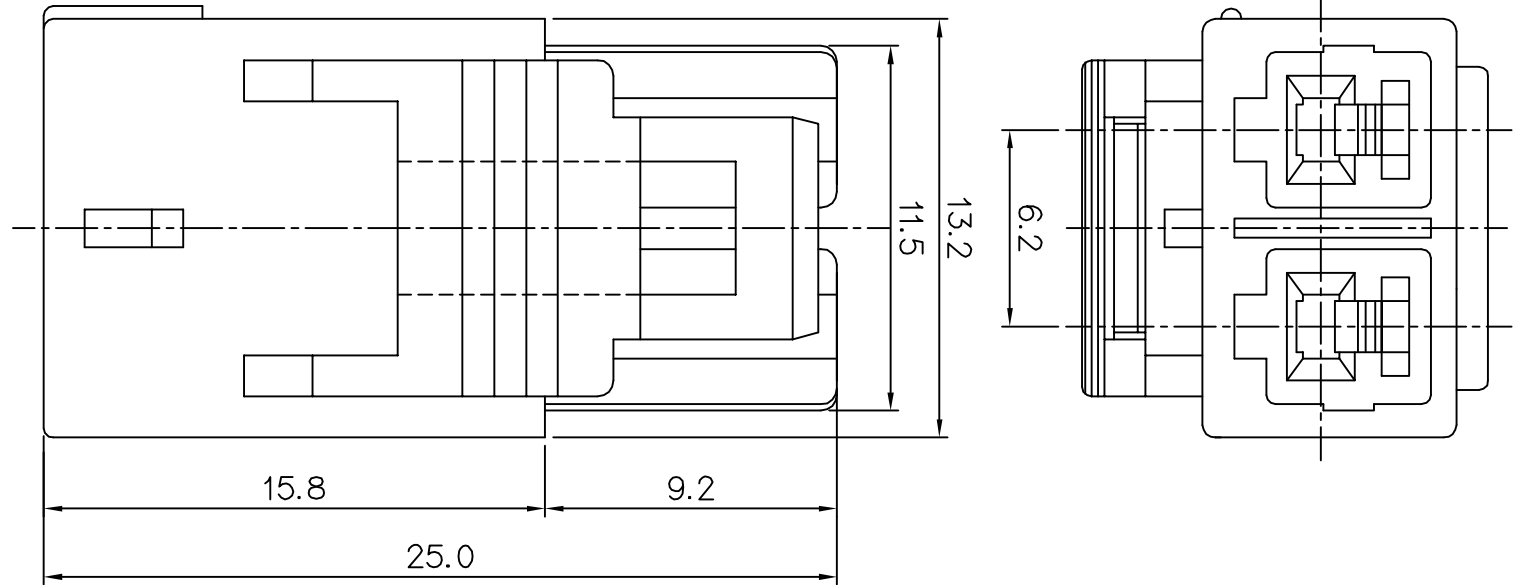


주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: ST730694,695,696,697,872-3
- 3.적용 HS'G,R/HOLDER: MG621164,621173,MG631165
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK

△/3

|           |             |
|-----------|-------------|
| PART NO.  | MATERIAL    |
| MG611163  | PBT (V0)    |
| MG611163G | PBT+PC (V0) |

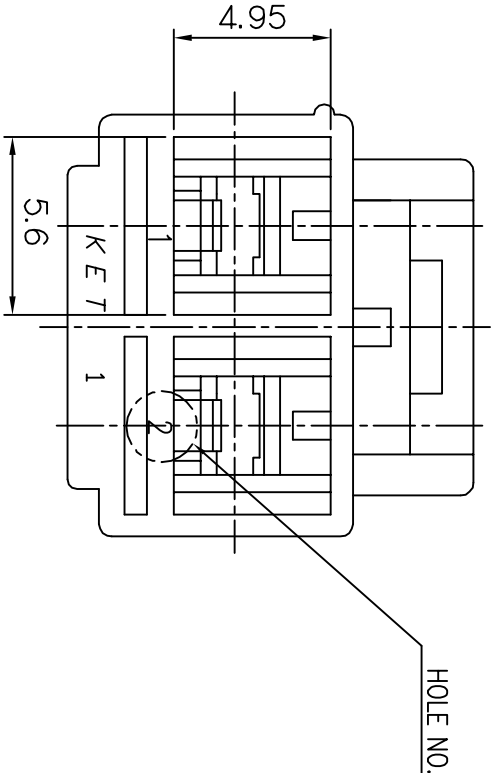

|      |                             |      |      |      |          |                             |                       |                                                      |             |
|------|-----------------------------|------|------|------|----------|-----------------------------|-----------------------|------------------------------------------------------|-------------|
|      |                             |      |      |      |          | MATERIAL                    | △ SEE TABLE           | KIEP KOREA ELECTRIC<br>ENGINEERED TERMINAL CO., LTD. |             |
|      |                             |      |      |      |          | FINISH                      | NATURAL               |                                                      |             |
| △    | ECO-1409-113 근거 도면 제작성      | LCM  | KSH  | BUC  | 14.09.19 | WIRE RANGE                  |                       | CLASS                                                |             |
| △    | 실제사용변경서 ST10128 근거 도면제작성    | KSH  |      |      | 11.04.29 | INSULATION                  |                       | TYPE                                                 |             |
| △    | 실제사용변경서 SO40114 근거 P/No. 추가 | PJM  |      |      | 04.08.25 |                             |                       |                                                      |             |
| LTR  | REVISION RECORD             | DR.  | CHK. | APP. | DATE     | TOLERANCE<br>AS PER<br>SPEC | SCALE                 | PART NO.                                             | △ SEE TABLE |
| DR.  | KO '96.07.16                | CHK. |      |      | 07/16    | SEE TABLE                   | 4/1                   |                                                      |             |
| CHK. |                             | APP. |      |      | 07/16    | PART NAME                   | 1806 D/L 2P PLUG HS'G |                                                      |             |