
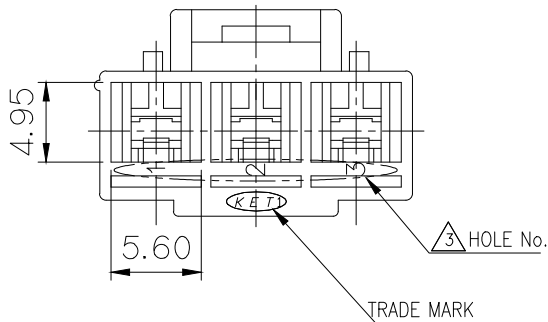
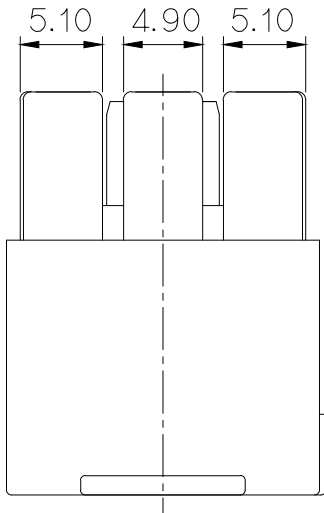
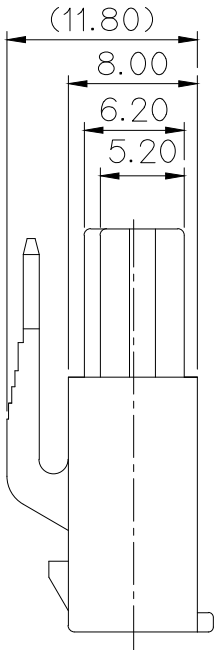
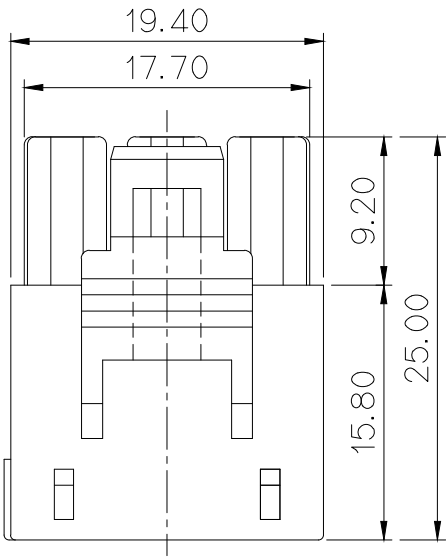



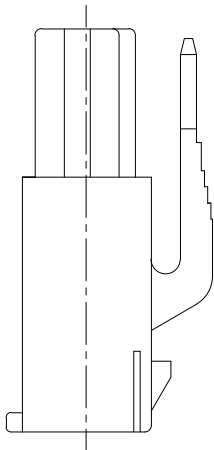

△ GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

NOTE

- MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730694,695,696,697,872-3
- APPLICABLE HOUSING : MG621167, 621174
- APPLICABLE R/HOLDER : MG631168-2
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 적용 TERMINAL: ST730694,695,696,697,872-3
- 적용 HOUSING: MG621167, MG621174
- 적용 R/HOLDER: MG631168-2
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

1 2	PART NO.	MATERIAL
	MG611166	PBT(V0)
	MG611166G	△ PBT+PC(V0)
	MG611166T	△ PET+PC(GWIT)

△ ECO-1610-081 근거 도면 재작성	SMG KSH	BUC	16.10.07	MATERIAL SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD. ENGINEERED
△ ECO-1405-062 근거 도면 재작성	LCM KSH	BUC	14.05.16		
△ 설계사양변경서'S110128'근거 도면재작성	KSH	7/28	11.04.29	FINISH NATURAL	CLASS
△ 설계사양변경 S090289근거 재작성	PJM	7/28	09.09.30	WIRE RANGE	
△ 사양추가에 따른 P/NO. 추가	JJY	7/28	07.05.14	INSULATION	TYPE
△ S040114근거 P/NO. 추가	7/28	7/28	04.08.25	TOLERANCE EXCEPT AS NOTED SEE TABLE	PART NO. SEE TABLE
LTR REVISION RECORD	DR. CHK. APP.	DATE			
DR. KO 96.07.18	CHK. 7/28	96.07.18		PART NAME 1806 D/L 3P PLUG HS'G	
	APP. CHOSM.	96.07.18			

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK