

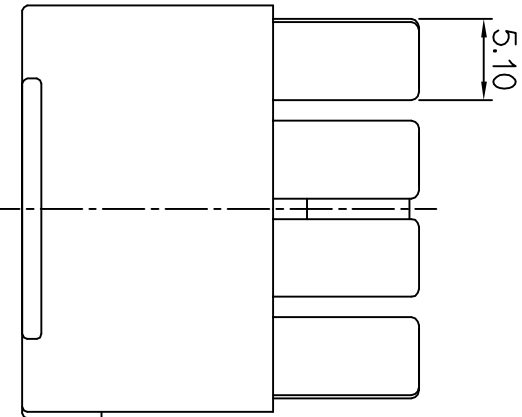
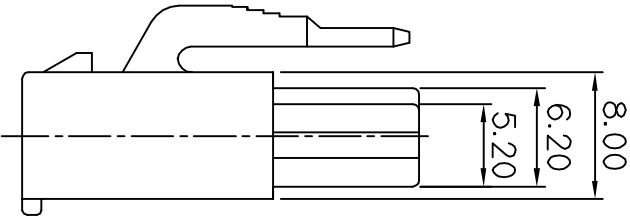
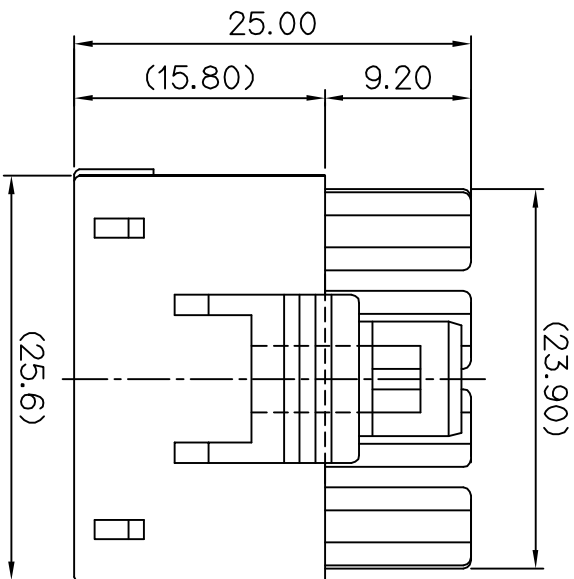


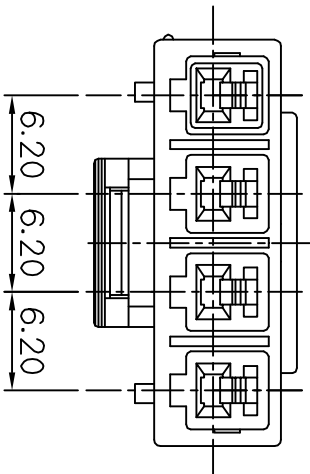

GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730694,695,696,697,872--
HOUSING : MG621710, MG621715
REAR HOLDER : MG63171-2
3. HAZARDOUS SUBSTANCES IN PARTS (Lead,
Mercury, Cadmium, Hexavalent Chromium, PBBs,
PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& ROHS REGULATION

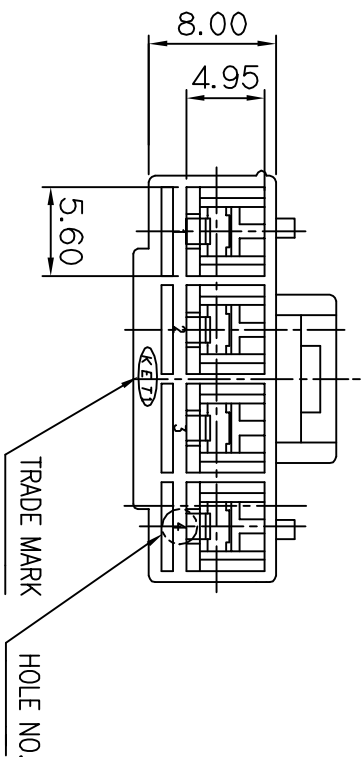

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.

2. 적용 TERMINAL : ST730694,695,696,697,872-3

HOUSING : MG621170, MG621175

REAR HOLDER : MG631171-2

3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬
PBBS, PBDES)은 EU ELV 지침 및 RoHS 법규에서 지정한
최대 허용농도를 초과해서는 안 된다.

					MATERIAL PBT(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH NATURAL		
					WIRE RANGE		
					INSULATION		
					CLASS		
					TYPE		
△	설계시공변경서 SH10128 근거 도면제작성			KSH	—	11. 04. 29	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED
DR.	KO. 96.07.16		CHK.		APP.		PART NAME
CHK.			APP.		DATE		1806 D/L 4P PLUG HS'G