

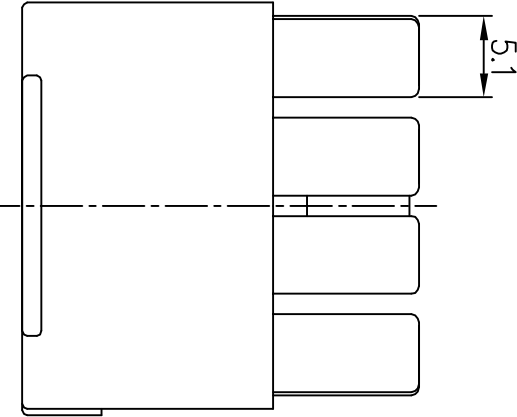
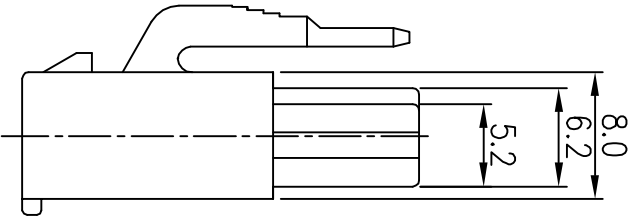
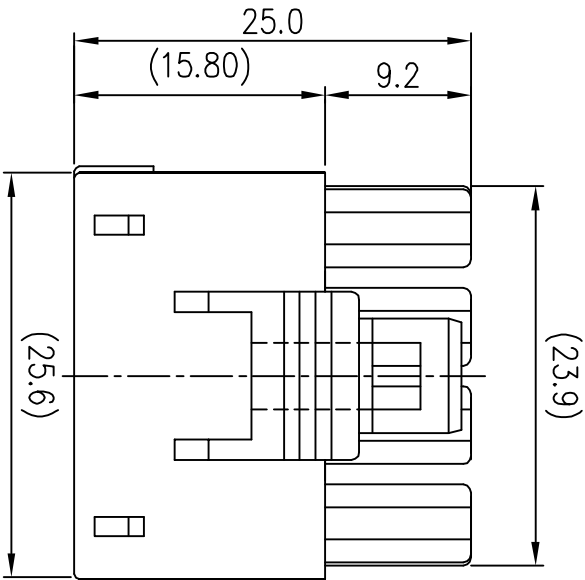


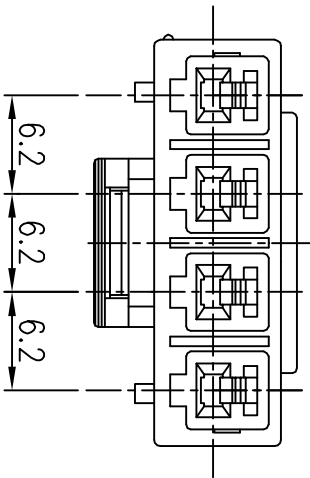

GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730694,695,696,697,872-3
HOUSING : MG621170T
REAR HOLDER : MG631171-2
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead,
Mercury, Cadmium, Hexavalent Chromium, PBBs,
PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& ROHS REGULATION

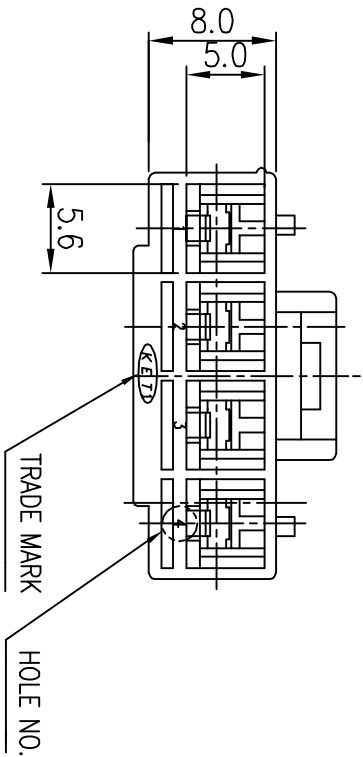

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.

2. 적용 TERMINAL : ST730694,695,6,96,6,97,8,72-3

HOUSING : MG621170T

REAR HOLDER : MG631171-2

3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

						MATERIAL	PBT(V0)	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
						FINISH	NATURAL	
						WIRE RANGE	CLASS	
						INSULATION	TYPE	
LTR	REVISION RECORD	DR.	CHEK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		
DR. LCM.	'12.09.05	CHEK. KSH.	'12.09.05	APP. <i>[Signature]</i>	'12.09.05	SEE TABLE	SCALE 2 / 1	
CHEK.		APP. <i>[Signature]</i>	'12.09.05	PART NAME				1806 D/L 4P PLUG HS'G
							PART NO.	MG611169T