


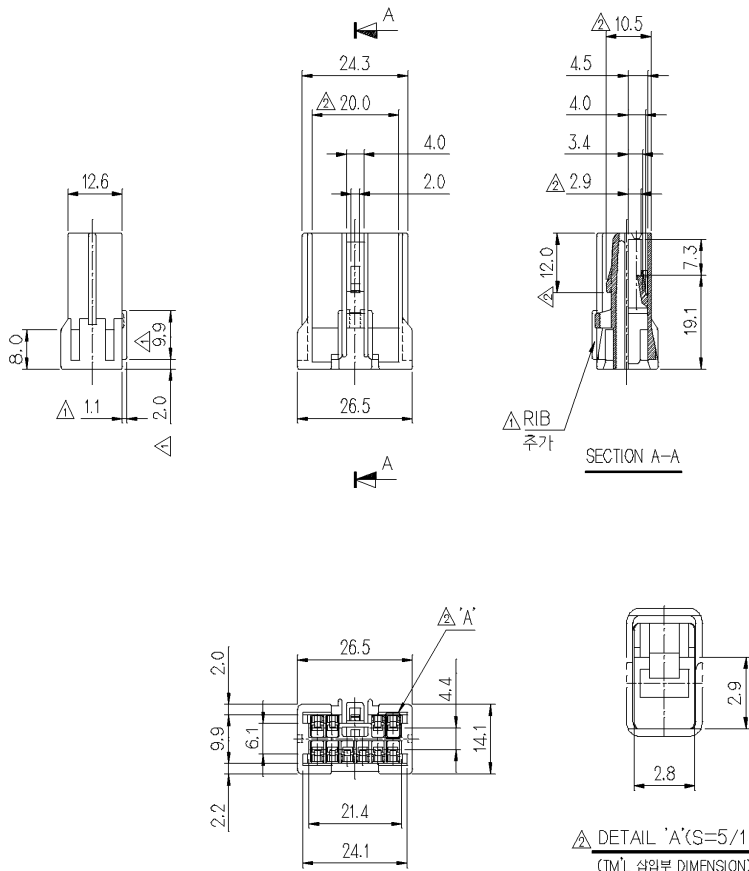

NO.	MATERIAL	COLOR
* 0	P B T	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK
6		W/GREEN
7		BROWN
8		GREEN

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.10	

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL: ST730497, ST730498
3. 적용 HOUSING: MG621177
4. 적용 REAR HOLDER: MG631178
5. CONNECTOR 삽입력 & 발거력: 9.0Kgf 이하

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730497, 730498
2. APPLICABLE HOUSING : MG621177
2. APPLICABLE REAR HOLDER : MG631178
6. CONNECTOR RETENTION FORCE : IN 9.0Kgf MAX
OUT 5.0Kgf MAX

ISSUE MARK

KOREA ELECTRIC
TERMINAL CO., LTD.

					MATERIAL SEE NOTE		KOREA ELECTRIC TERMINAL CO., LTD		
					FINISH NATURAL				
					WIRE RANGE		CLASS .070 II		
					INSULATION		TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG611176
DR.	AEO. 96.12.04		CHK.		JH CHO	96.12.06	PART NAME		
CHK.	SI JANG 96.12.09		APP.		WATANABE	96.12.09	SDL II 10P PLUG HOUSING		