

GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

- NOTE
1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE TERMINAL : ST730245-3

3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기





1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.

2. 적용 터미널 : ST730245-3

3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

PART NO. MG611191

CUSTOMER DRAWING

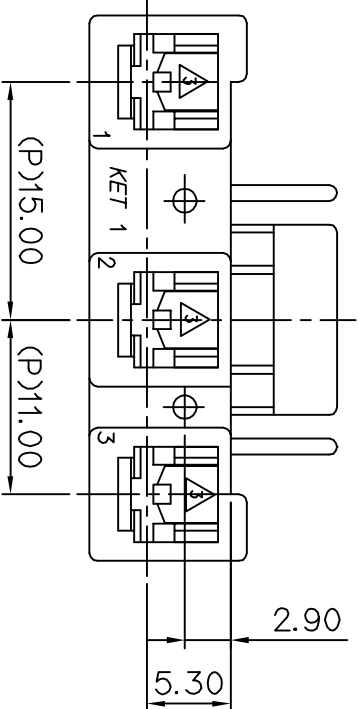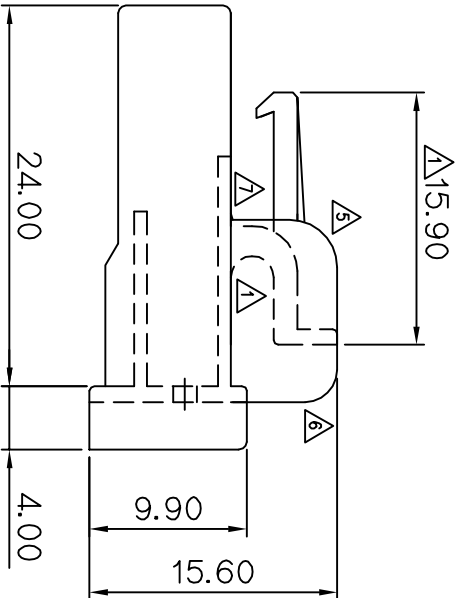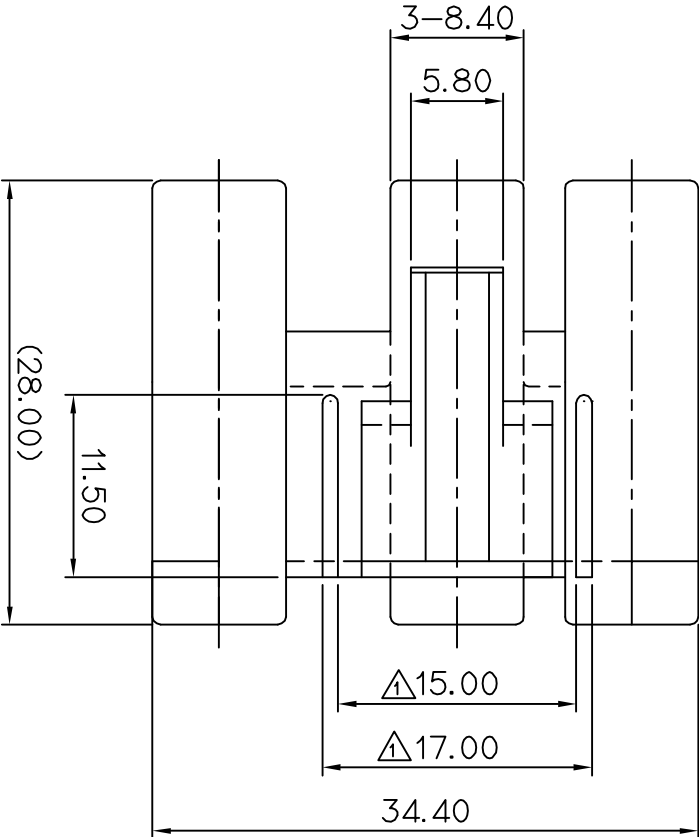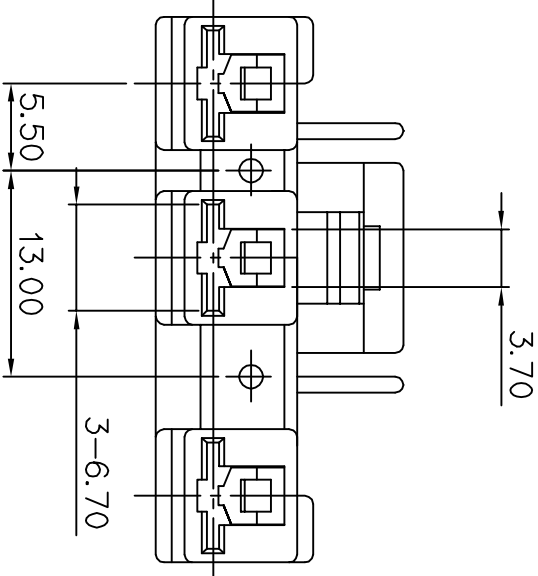

△

P/NO	MATERIAL
1	MG611191 NYLON66
2	MG611191R NYLON66(GW17)
3	MG611191P PBT(V0)

NO.	MATERIAL	COLOR
0	PBT (V0)	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

8	설계/8변경(S110728)근거 도면 제작성	PJM		11.04.28	MATERIAL PBT(V0) FINISH NATURAL WIRE RANGE INSULATION CLASS TYPE 187 PART NO. MG611191
7	설계/8변경(S110319)근거 도면 제작성	PSH		10.12.16	
6	설계/8변경(S100713)근거 도면 제작성	PSH		10.07.13	
5	설계/8변경(S090135)근거 도면 제작성	PSH		09.05.29	
4	S050150근거 도면 제작성	MIN		05.07.01	
3	S040722근거 차수 1회 변경	LSY		04.10.29	TOLERANCE AS NOTED
2	S040114근거 PART NO.추가	HAK		04.08.25	
1	설계/8변경(S020158)근거 도면 제작성	LSY		02.11.06	
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	PART NAME
DR.	HAK '96.06.12	CHK.		6/18	187 3P PLUG HOUSING
CHK.	S. w	6/18	APP.	6/18	