
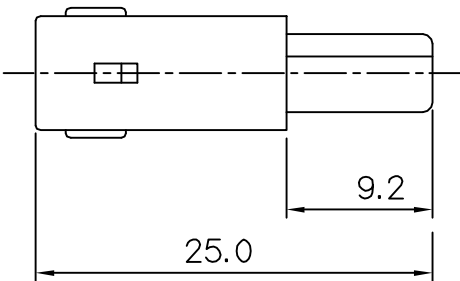
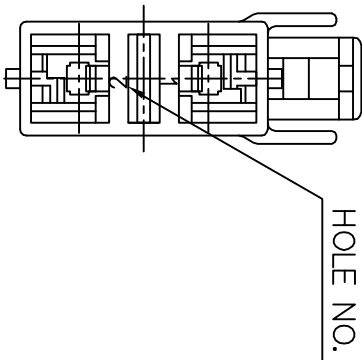
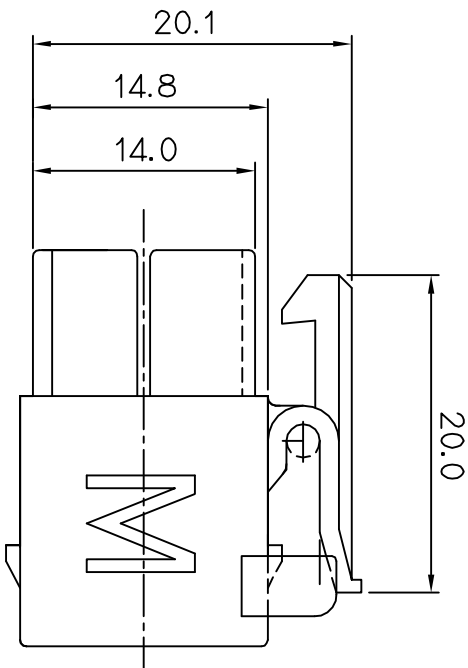
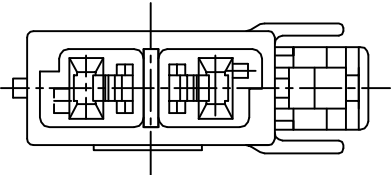
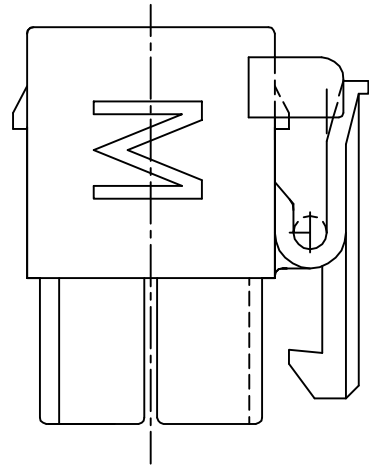


GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

NO.	MATERIAL	COLOR
0	PBT(V-0)	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

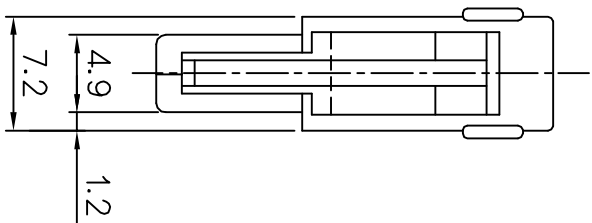

NOTE

- | |
|--|
| 1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION. |
| 2. APPLICABLE TM'L:ST730841,842,843,844, APPLICABLE R/H:MG631228
APPLICABLE HS'G : 4P-MG621223, 6P-MG621224 |
| 3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury,
Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT
EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED
UNDER EU ELV DIRECTIVE & RoHS REGULATION |

주 기

1. 기능상 유효한 BURR 및 WELDLINE등이 없을것.
2. 적용 테미널:ST730841,842,843,844, 적용 R/HOLDER:MG631228
적용 HS'G : 4P-MG621223, 6P-MG621224
3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDES)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

ISSUE MARK	
------------	--

					MATERIAL	PBT(V-0)	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
					WIRE RANGE	CLASS		0709
					INSULATION	TYPE		MULTI
△	설치시반경(S10128)근거 도면 재작성		KSJ 2016. 4월 28일					
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE			
DR.	KO.99.07.29	CHK.	[Signature]		11.26			
CHK.		APP.	CHOSUN.		11.27			
PART NAME MULTI 2P PLUG (M)								