





GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST730837, 838, 839, 840
- 3.적용 HOUSING : 4P REC HS'G (MG621223)
6P REC HS'G (MG621224)
- 4.적용 REAR HOLDER : MG631228
- 5.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBS, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730837, 838, 839, 840
3. APPLICABLE HOUSING : 4P REC HS'G (MG621223)
6P REC HS'G (MG621224)
4. APPLICABLE REAR HOLDER : MG631228
5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

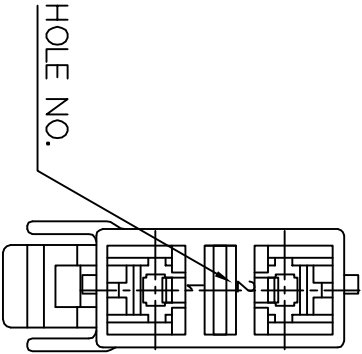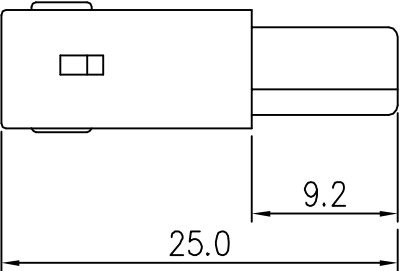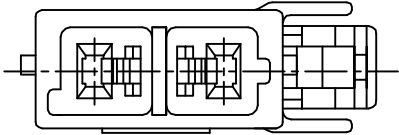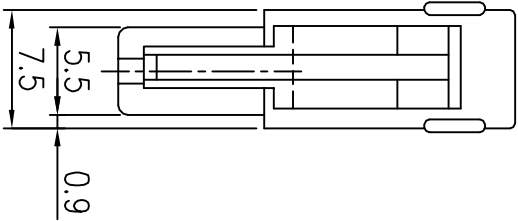

						MATERIAL	PBT(V-0)	KIET KOREA ELECTRIC TERMINAL CO., LTD. [ENGINEERED]	
						FINISH	BLUE		
						WIRE RANGE			
						INSULATION			
						CLASS	0709		
△	설계시양변장"ST10128"근거 도면 재작성							TYPE	MULTI
LTR	REVISION RECORD			DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	
DR.	KO.99.07.29			CHK.	11/26		SCALE	PART NO.	MG611226
CHK.				APP.	CHOSH 11/27		PART NAME		
MULTI 2P PLUG (R)									

CUSTOMER DRAWING

PART NO. MG611226

(DIMENSIONS IN MM)