
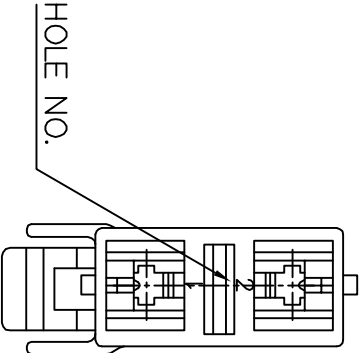
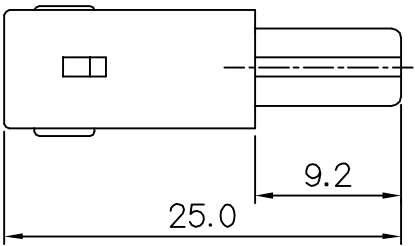
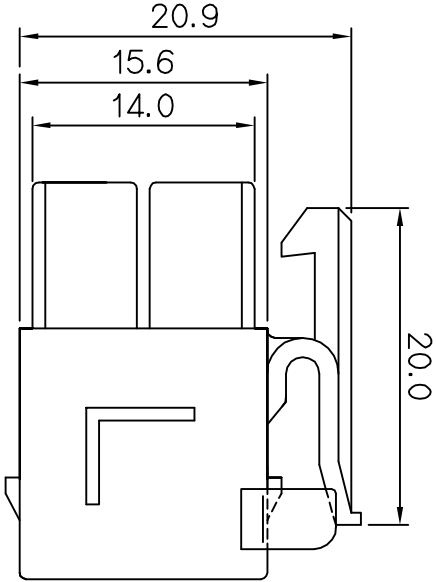
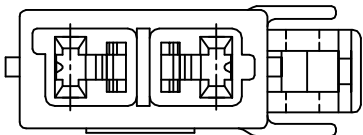


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

- 주 기**
- 1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
 - 2.적용 TERMINAL : ST730825, 826, 827, 828
 - 3.적용 HOUSING : 4P REC HS'G (MG621223)
6P REC HS'G (MG621224)
 - 4.적용 REAR HOLDER : MG631228
 - 5.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

- 1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE TERMINAL : ST730825, 826, 827, 828
- 3. APPLICABLE HOUSING : 4P REC HS'G (MG621223)
6P REC HS'G (MG621224)
- 4. APPLICABLE REAR HOLDER : MG631228
- 5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavdient Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

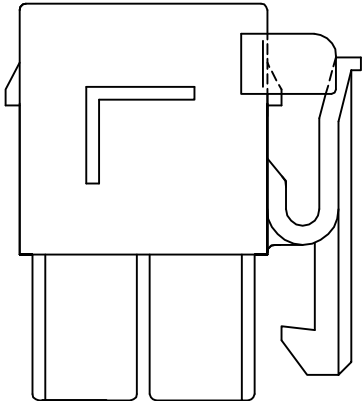

ISSUE MARK

							MATERIAL	PBT(V-0)	KIEIT KOREA ELECTRIC [ENGINEERED] TERMINAL CO., LTD.			
							FINISH	YELLOW				
							WIRE RANGE					
							INSULATION					
							CLASS	0709				
△	설계시공변경*ST10128*근거 도면 재작성									TYPE	MULTI	
LTR	REVISION RECORD			DR.	CHK.	APP.	DATE	TOLERANCE EXPERT AS NOTED		SEE TABLE	SCALE 2/1	PART NO. MG611227
DR.	KO.99.07.29			CHK.	11/26			PART NAME		MULTI 2P PLUG (L)		
CHK.				APP. CHOSH 11/27								

CUSTOMER DRAWING

PART NO. MG611227

(DIMENSIONS IN MM)