
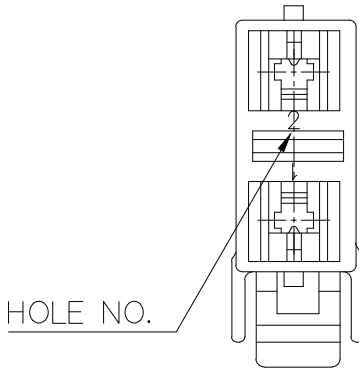
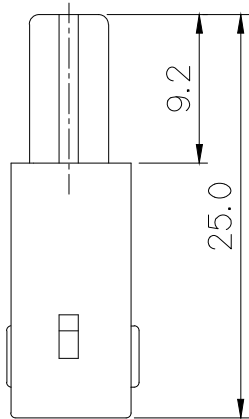
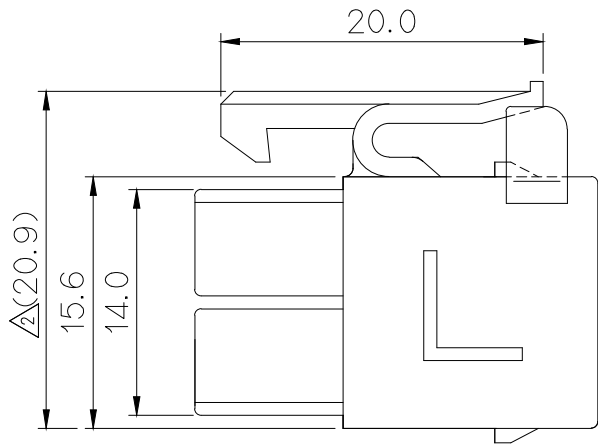
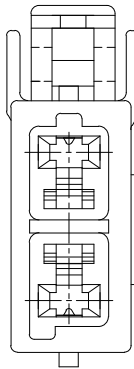
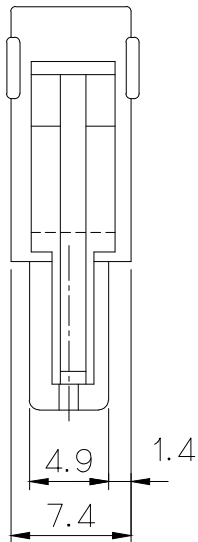


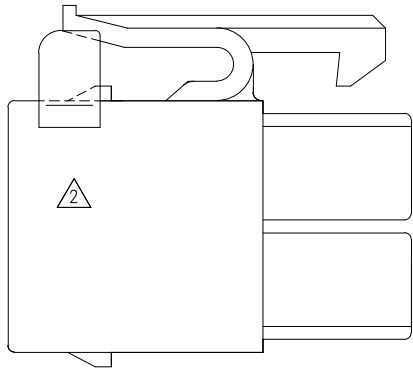

△GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST730825, 826, 827, 828
- 적용 HOUSING : 4P REC HS'G (MG621223)
6P REC HS'G (MG621224)
- 적용 REAR HOLDER : MG631228
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730825, 826, 827, 828
- APPLICABLE HOUSING : 4P REC HS'G (MG621223)
6P REC HS'G (MG621224)
- APPLICABLE REAR HOLDER : MG631228
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

						MATERIAL		PBT(V0)	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		YELLOW	
						WIRE RANGE		CLASS	0709
	ECO-1503-539의거 도면 재작성	SMG	KSH	BUC	'15.03.24	INSULATION		TYPE	MULTI
	설계사양변경" S110128" 근거 도면 재작성	LCM	KSH	BUC	'11.04.28				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG611227
DR.	KO.99.07.29		CHK.			11/26	PART NAME		
CHK.			APP.	CHOSH		11/27	MULTI 2P PLUG (L)		