



SECTION B-B

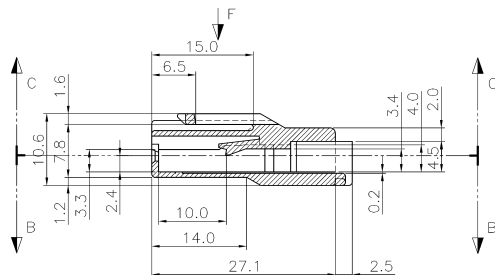


SECTION A-A




SECTION C-C

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	



VIEW F



NOTE

- 1.저품질능상 유해한 BURR, 변형 및 WELD LINE등이 없을것.
- 2.작용 TERMINAL : ST730698,699
- 3.TERMINAL RETENTION FORCE: 6.0kgf이상 (R/H 포함 - 10 kgf이상)
- 4.TERMINAL INSERTION FORCE : 2.0kgf이하
- 5.CONNECTOR 삽,발거력 :9.0kgf이하



ISSUE MARK

				MATERIAL	NYLON 66	 KOREA ELECTRIC TERMINAL CO., LTD.
				FINISH	BLACK	
				WIRE RANGE		CLASS
				INSULATION		TYPE
					SEE TABLE	7123-1923
LTR	REVISION RECORD	DR	CHK	APP.	DATE	PART NO.
DR.	HAG 96.10.17	CHK	9/12/20	APP.	12/20	MG611251
CHK.	S.I. SMC	APP.	12/20			
FRT NAME						.110 THERMO 2P PLUG HOUSING