

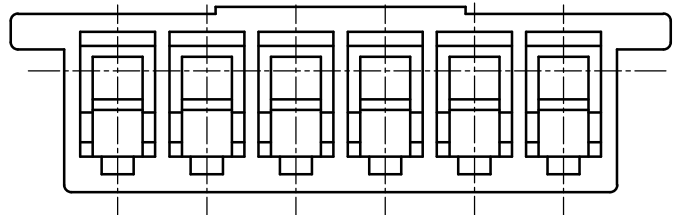
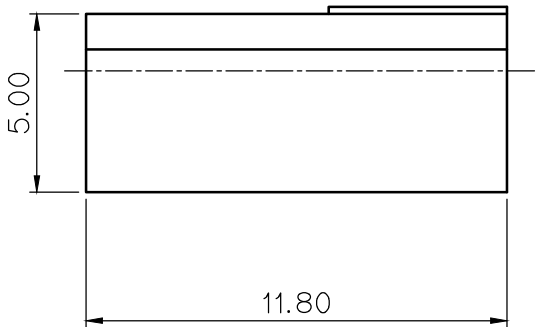


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

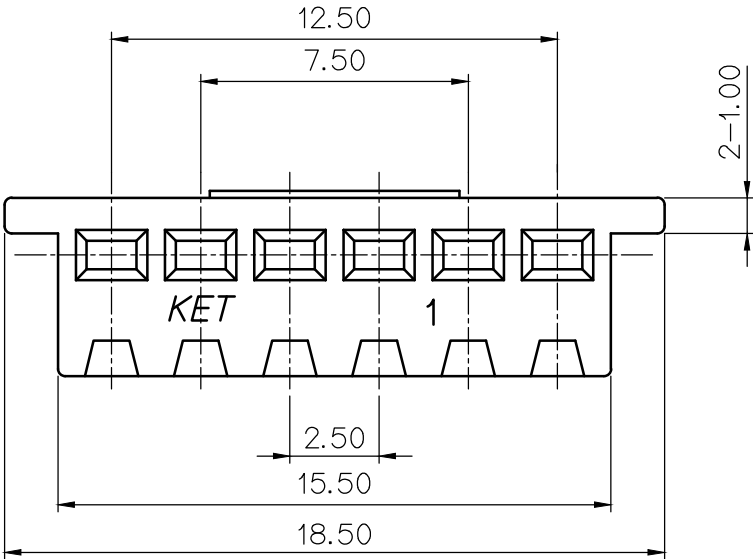

NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

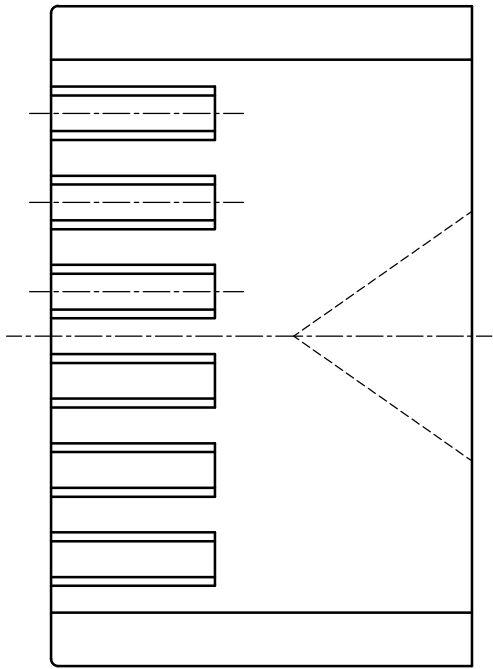

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPICABLE TERMINAL : ST730335
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury,
Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT
EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED
UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 터미널 : ST730335
3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs,
PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를
초과해서는 안 된다.

	ISSUE MARK

						MATERIAL PBT		KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH SEE TABLE		
	설계사양변경(S110128)근거 도면 제작성	KSJ			'11.04.27	WIRE RANGE		CLASS
	설계사양변경(S990147)근거 도면 제작성	元			'99.08.16	INSULATION		TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO. MG611364
DR. KWON 96.11.15		CHK.			8.26	PART NAME 1006 - 6P PLUG HOUSING		
CHK. S.I.		8/26	APP.		8.27			