
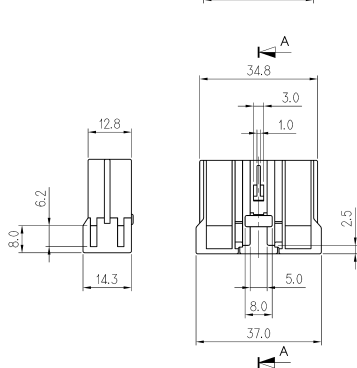
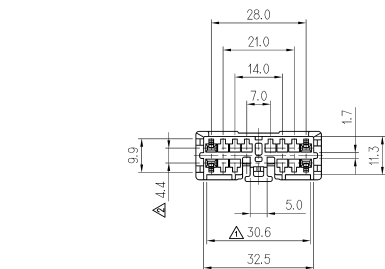



SECTION A-A

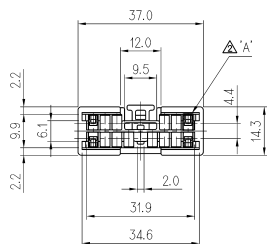

DETAIL 'A'(S=5/1)
(TM/L 삽입부 DIMENSION)


NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK
6		W/GREEN
7		BROWN
8		GREEN

주 기

- 1.기능상 유해한 BURR 및 WELDLINE들이 없을것.
- 2.적용 TERMINAL: ST730497, ST730498
- 3.적용 HOUSING: MG621515
- 4.적용 REAR HOLDER: MG631516
- 5.CONNECTOR 삽입력 & 발거력: 9.0Kg이하

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL :ST730497, 730498
2. APPLICABLE HOUSING :MG621515
2. APPLICABLE REAR HOLDER :MG631516
6. CONNECTOR RETENTION FORCE : IN 9.0Kgf MAX OUT 5.0Kgf MAX



ISSUE MARK

				MATERIAL SEE NOTE		KET KOREA ELECTRIC			
				FINISH NATURAL		TERMINAL CO., LTD.			
 고려 요청에 의한 치수추가		JUM		 '00.11.09		WIRE RANGE CLASS .070 II			
 사양변경(980236)관리 수정		HOC		 '99.02.10		INSULATION TYPE			
LTR	REVISION RECORD		DR	CHK	APP	DATE	TRANSFER DESIG. IN NOTES	SCALE 2/1	PART NO. MG611514
DR.	JANG. 98.03.24		CHK			98.03.25		PART NAME	
CHK	98.03.25		APP			98.03.25		SDL II 14P PLUG HOUSING	