


GENERAL TOLERANCE (HOUSING)

USED ON

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL: ST 730694,695,696,697
HOUSING: MG 621533,621534
R/HOLDER: MG 631535
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

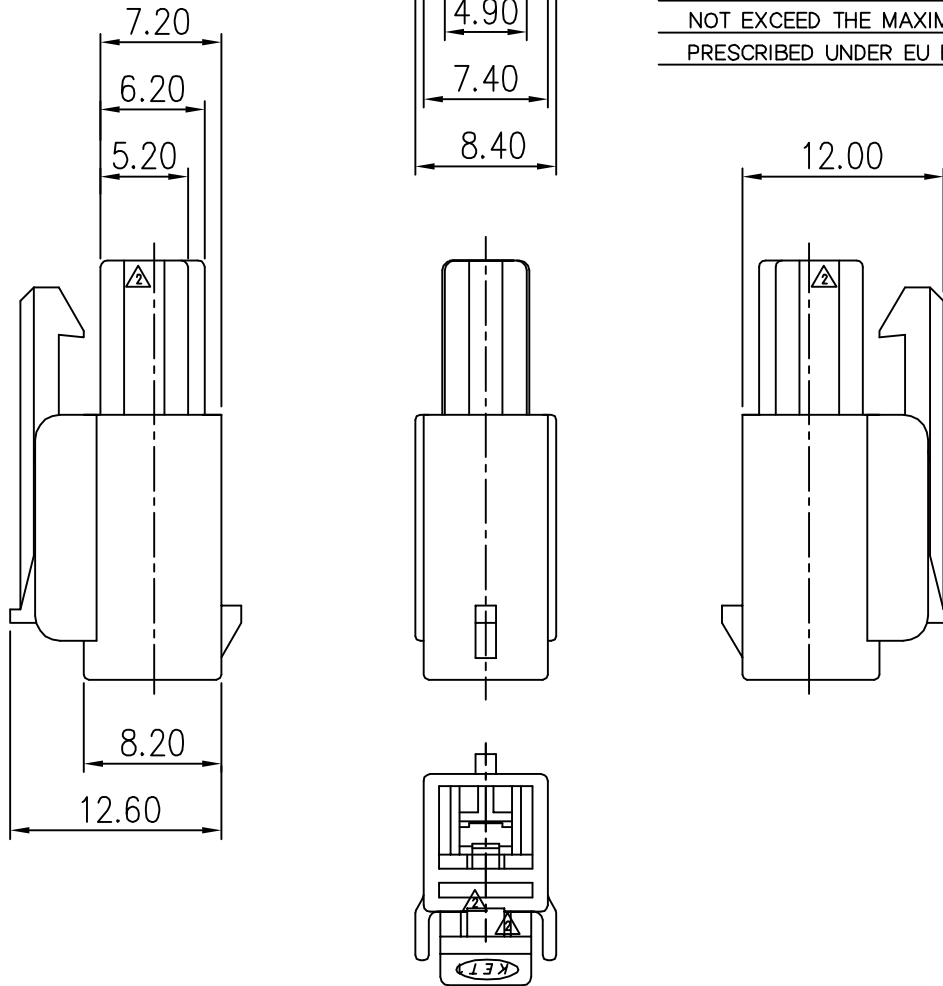

주 기

- 기능상 유해한 BURR, WELDLINE 없을 것
- 적용 TERMINAL: ST 730694,695,696,697
HOUSING: MG 621533,621534
R/HOLDER: MG 631535
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

ISSUE MARK

					MATERIAL		PBT	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH		SEE TABLE	
					WIRE RANGE		CLASS	
					INSULATION		TYPE	
	ECO-1110-085 근거 도면 재작성	LCM	KSH		'11.10.18			
	설계사양변경(S110128)근거 도면 재작성	KSJ			'11.04.27			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	KO.98.08.12	CHK.			08/13	SEE TABLE	2/1	MG611532
CHK.						PART NAME		
	08/13	APP.				1806 D/L 1P PLUG HS'G		