


MG611532T

CUSTOMER DRAWING

DIMENSIONS IN MM)

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

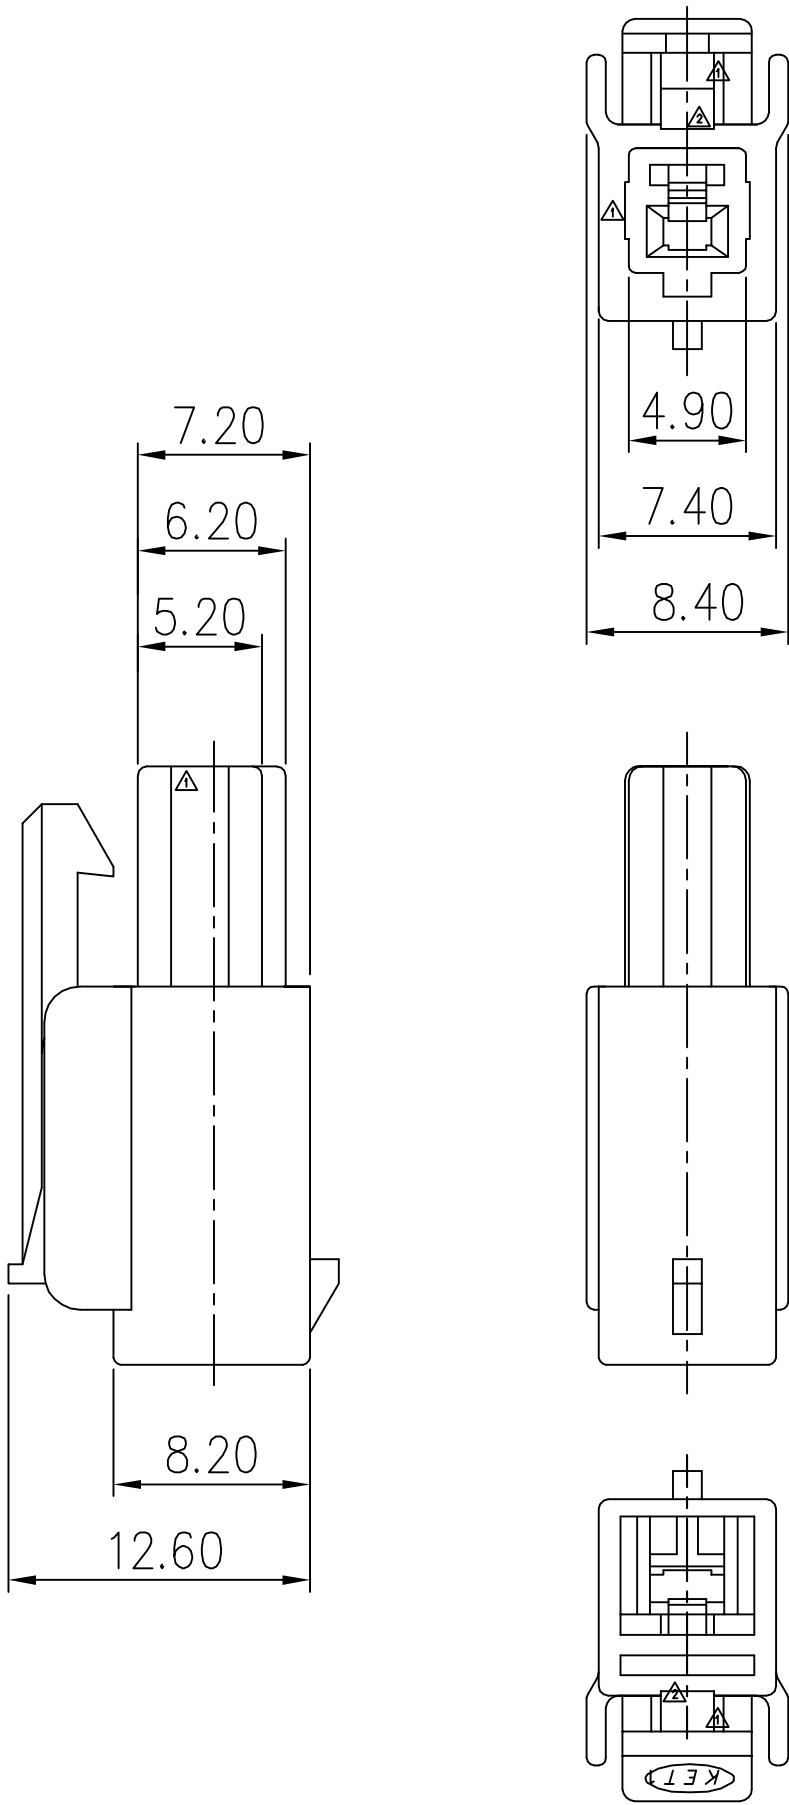

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL: ST730694,695,696,697,872
HOUSING: MG621533T, MG621534T
R/HOLDER: MG 631535
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR, WELDLINE 없을 것
- 적용 TERMINAL: ST730694,695,696,697,872
HOUSING: MG621533T, MG621534T
R/HOLDER: MG 631535
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	MATERIAL	COLOR
0	PBT/PC [G.W.I.T]	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

ISSUE MARK

					MATERIAL PBT/PC (G.W.I.T)		KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH SEE TABLE		
					WIRE RANGE		
△2	ECO-1110-085에 의거 도면 수정	LCM KSH	11.10.18		INSULATION		CLASS
△1	ECO-1109-219에 의거 도면 수정	LCM KSH	11.09.26		TOLERANCE EXCEPT AS NOTED SEE TABLE		TYPE
LTR	REVISION RECORD		DR. CHK.	APP.	DATE	SCALE 2/1	PART NO. MG611532T
DR. KO.98.08.12		CHK. 08/13		PART NAME 1806 D/L 1P PLUG HS'G			
CHK. 08/13		APP.					