

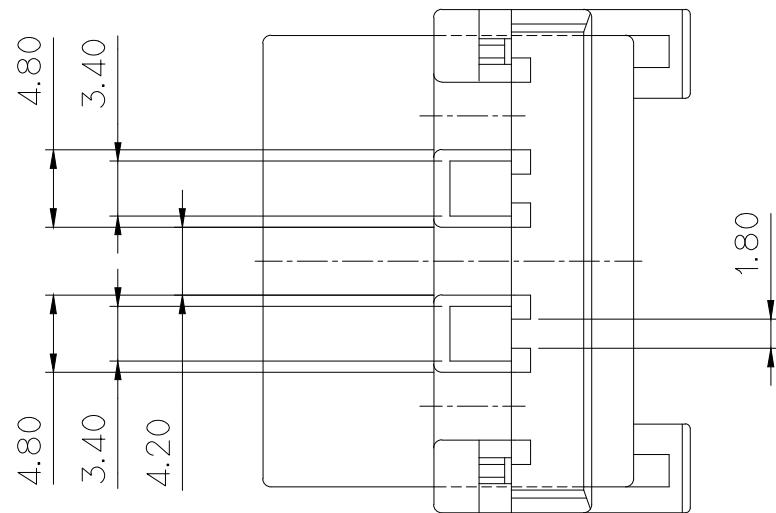
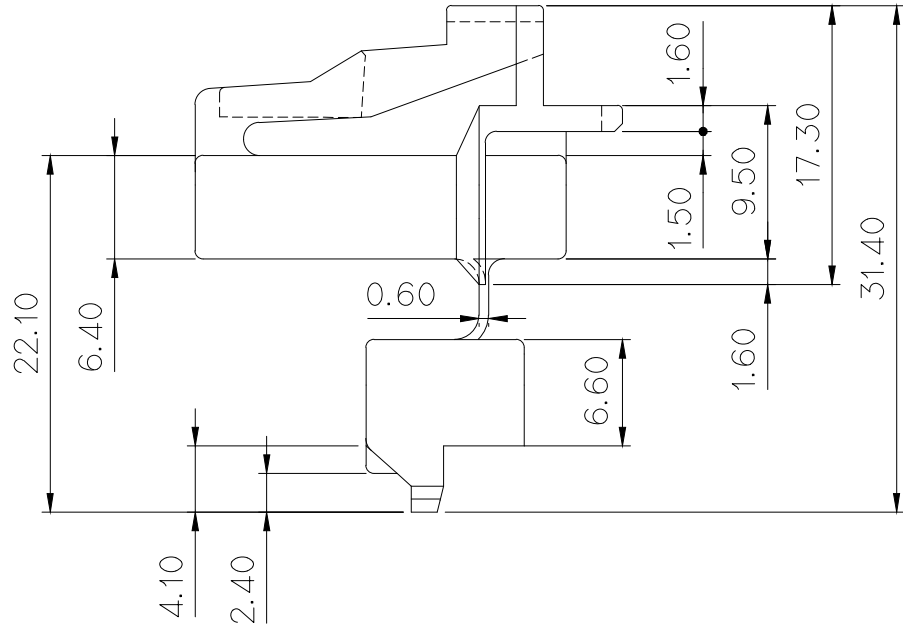
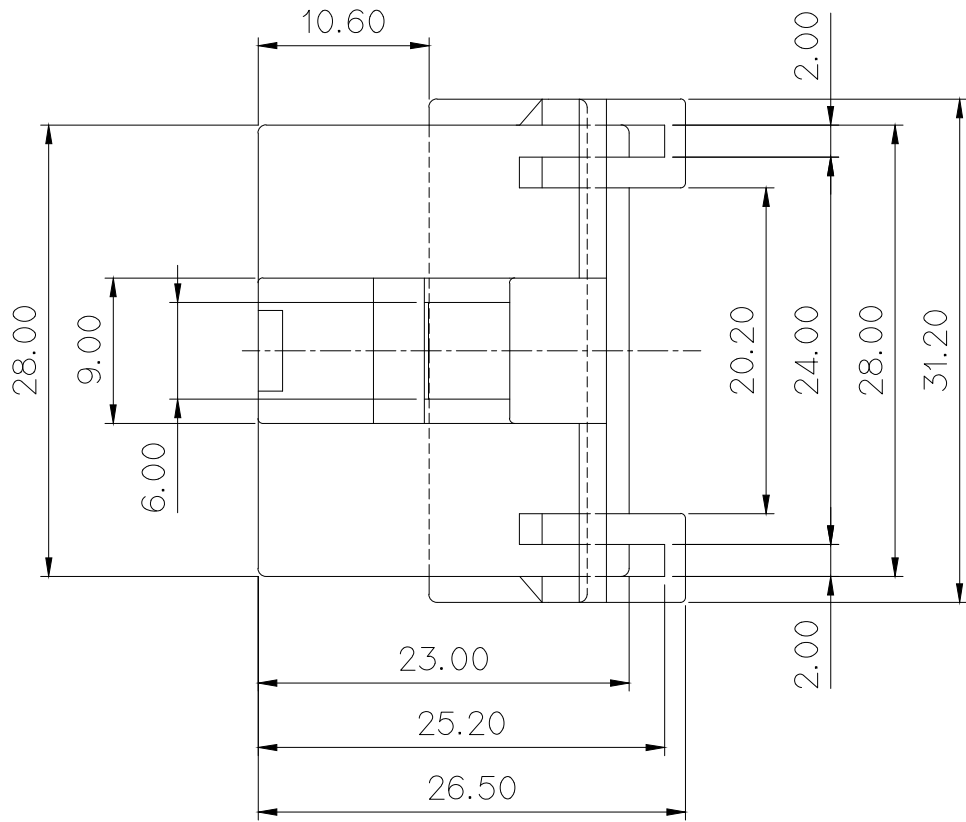


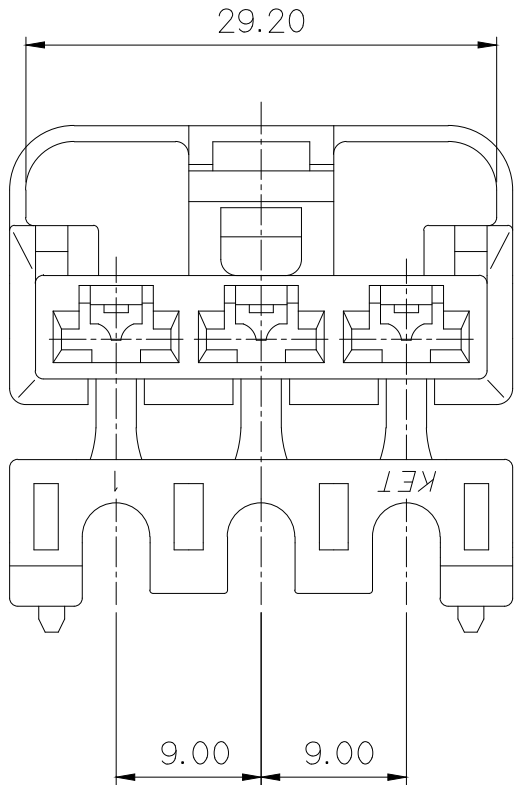

GENERAL TOLERANCE (HOUSING)							USED ON
1MAX	5MAX	10MAX	20MAX	45MAX	ANGLE	ECCENT	SEE NOTE
±0.10	±0.15	±0.20	±0.25	±0.30	±30'	0.10	

NOTE

- 1. MATCHING PART : MG641659
- 2. APPLICABLE TERMINAL : ST730467,468,469,470,471,472
- 3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

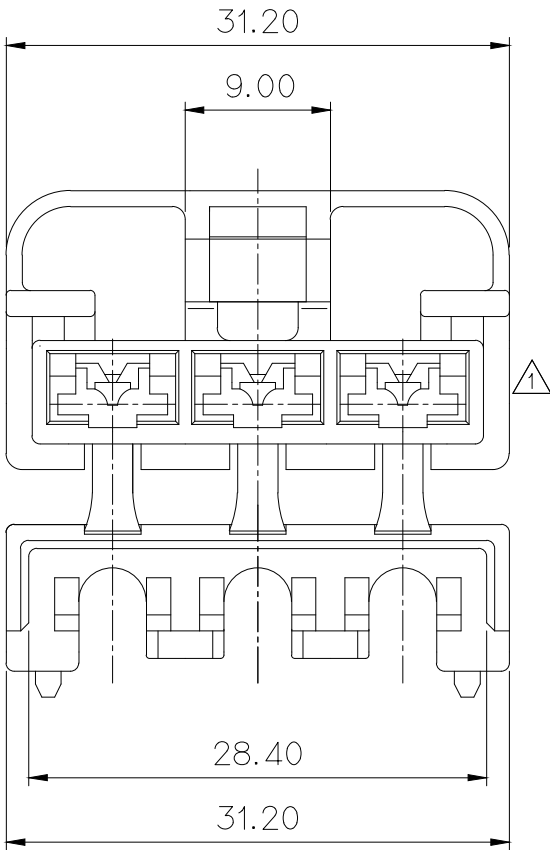

주 기

- 1. 적용 상대물 : MG641659
- 2. 적용 TERMINAL : ST730467,468,469,470,471,472
- 3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

					MATERIAL		NYLON66		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH		NATURAL				
					WIRE RANGE		CLASS				
					INSULATION		TYPE				
	시방변경 "020033"의거 도면재작성			LSY	LSY	2002.3.18					
LTR	REVISION RECORD			DR.	CHK.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG611657
DR.		HEE. '98.04.21		CHK. BOG		4/22		PART NAME			250 D/L 3P PLUG HS'G
CHK.		CHOSH 4/24		APP. Watanabe		4/24					

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK