
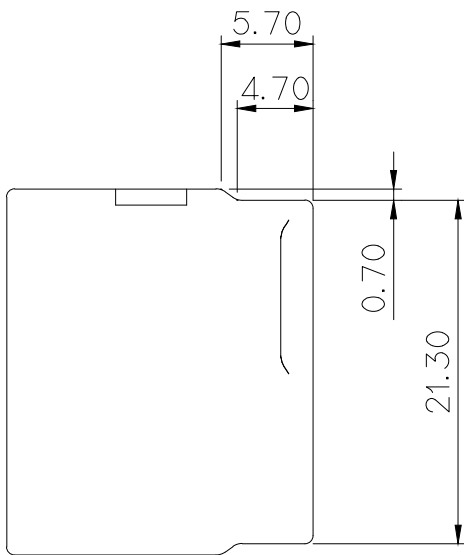
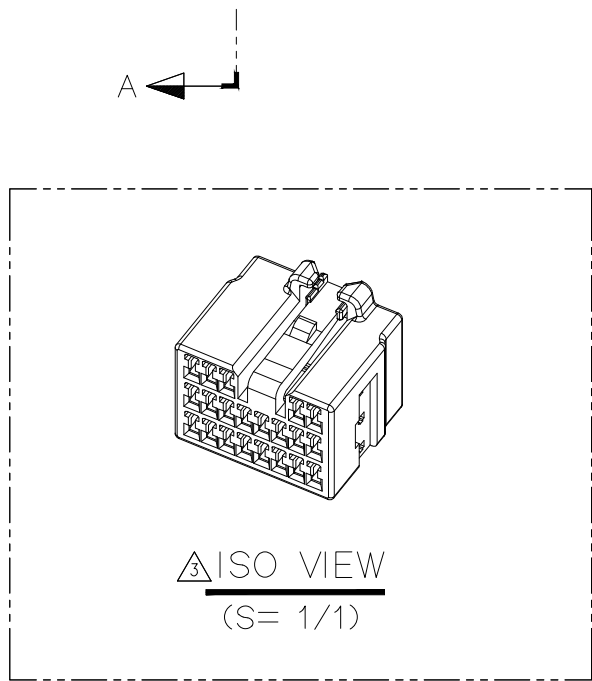
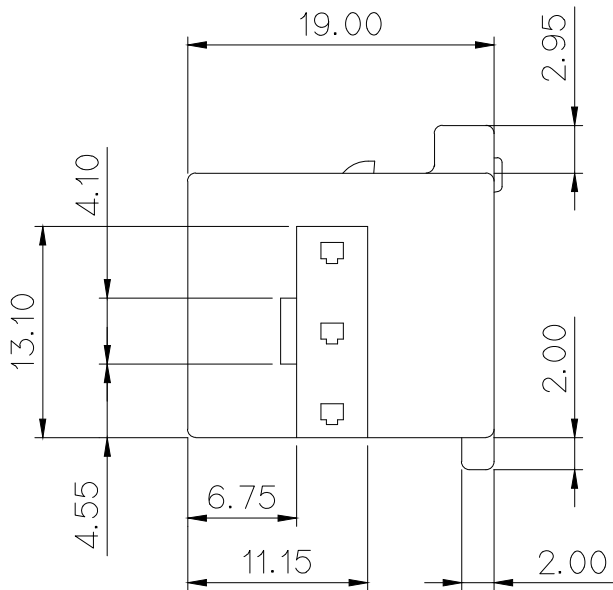
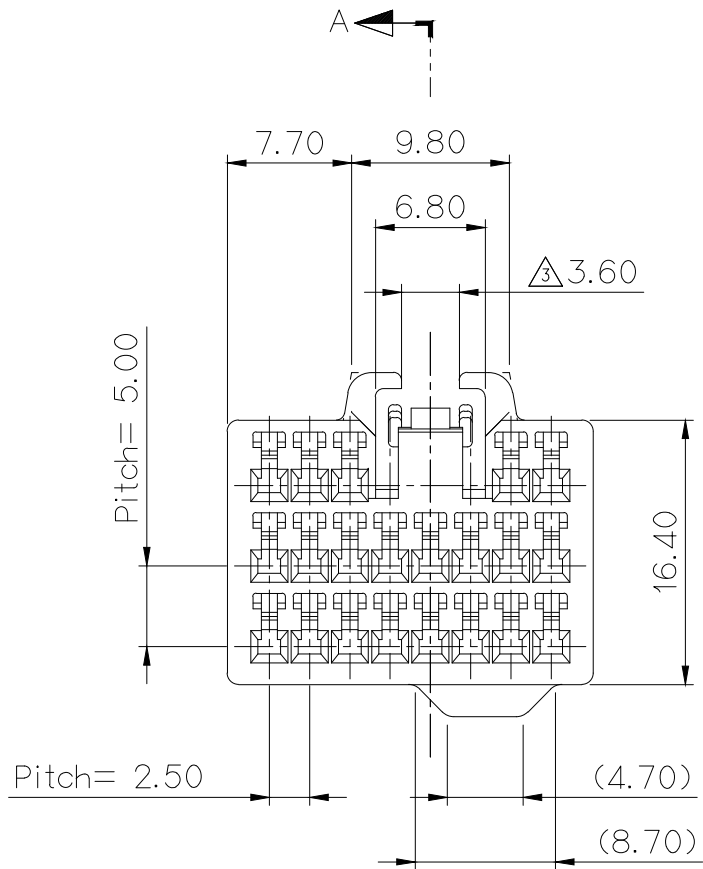




△3	NO.	MATERIAL	COLOR
*	0	P B T	NATURAL
	1		RED
	2		BLUE
	20		JADE
	3		YELLOW
*	4		GRAY
	40		DARK GRAY
	41		LIGHT GRAY
	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

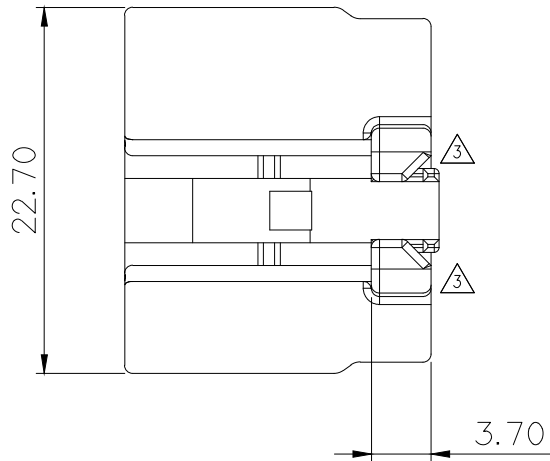

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE FROM BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL :ST730751-3
APPLICABLE HOUSING :MG621989
APPLICABLE SPACER :MG631988, MG631988-1, MG631988-5
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

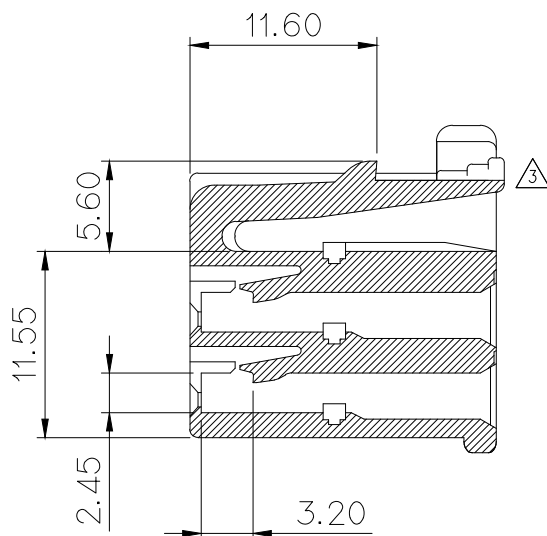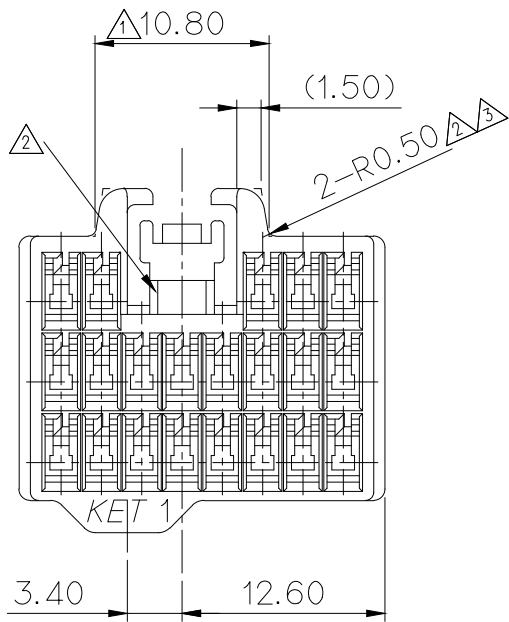

SECTION A-A

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL: ST730751-3
적용 HOUSING: MG621989
적용 SPACER: MG631988, MG631988-1, MG631988-5
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL △3 SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH △3 SEE TABLE			
△3	ECO-1604-212 근거 도면 변경	KJS	CKY	LSY	2016.04.22	WIRE RANGE		CLASS 050
△2	ECO-1311-010 근거	SYC	CSH	CWK	2013.11.04	INSULATION		TYPE