







GENERAL TOLERANCE (HOUSING)					USED ON
10MAX ±0.2	20MAX ±0.25	45MAX ±0.3	ANGLE ±30'	ECCENT 0.1	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL: ST730775, 776, 777
APPLICABLE HOUSING: MG622248
APPLICABLE SPACER: MG632247

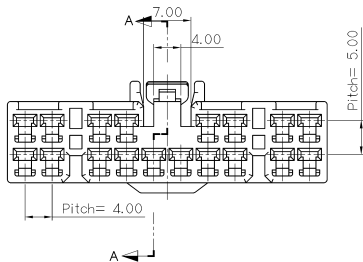

SECTION A-A

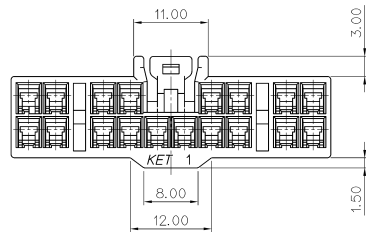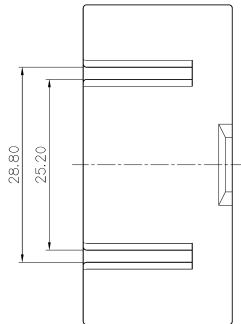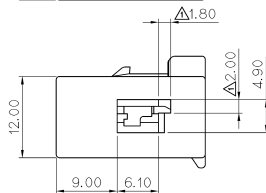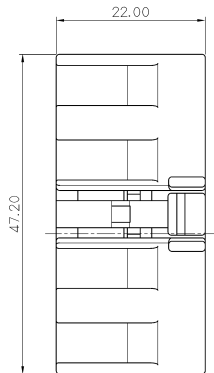

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL: ST730775, 776, 777
적용 HOUSING: MG622248
적용 SPACER: MG632247



ISSUE MARK

MATERIAL	PBT		KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	NATURAL		
WIRE RANGE	INSULATION	CLASS	.090
△ SPACER 호외용 범위	DR. 2002.5.29	TYPE	
LTR	REVISION RECORD	DR. 8/23	PART NO. MG612246
DR.	WON. 2001.08.22	APP. 8/23	SCALE 2/1
CHK.		PART NAME	ASC 18F HOUSING
APP.		DATE 8/23	