
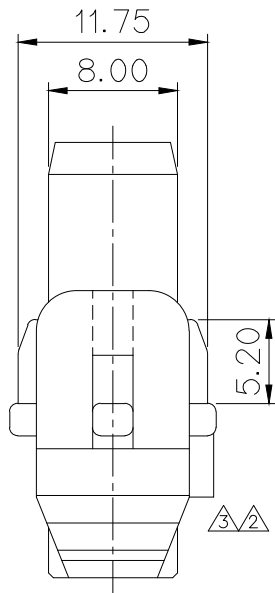
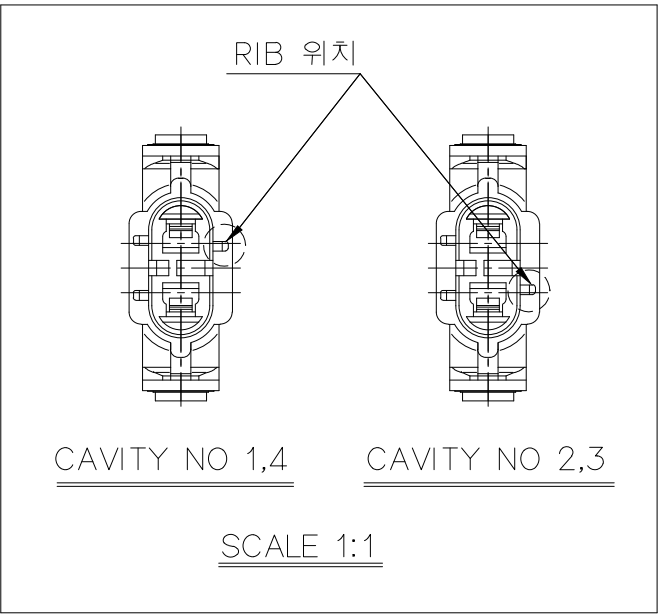
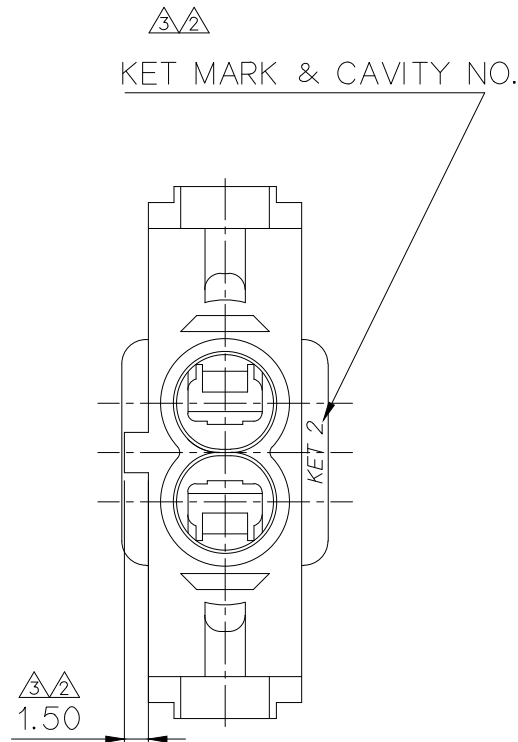
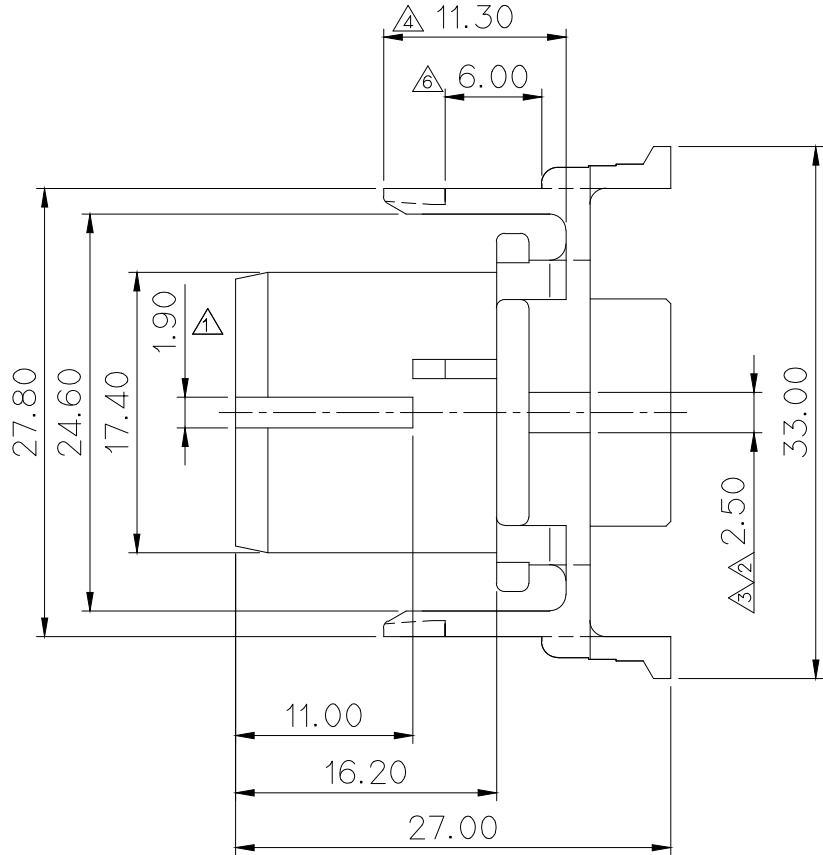
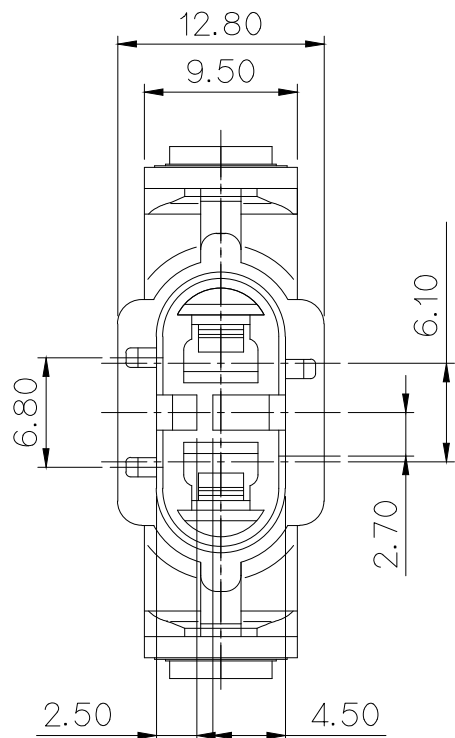


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

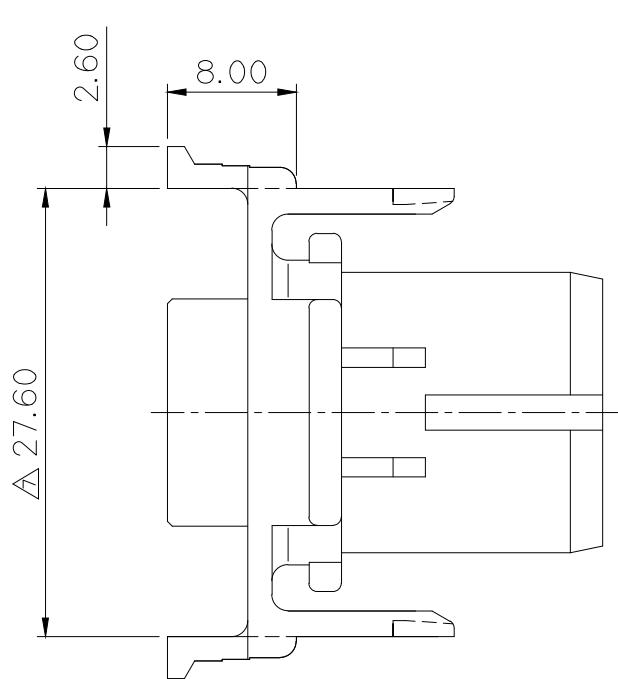

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL :ST730525-3
WIRE SEAL : MG680564
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM,HEXAVALENT CHROMIUM, PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL: ST730525-3
WIRE SEAL : MG680564
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



ISSUE MARK

금형 GATE 위치에 따른
RIB 위치가 다른 2종류 제품임

ECO-1108-157근거 도면 재작성 (원재료 변경)	SJK / JYS	KKJ	11.08.29
치수 현실화 관련 도면 수정	YJH / JYS	KKJ	11.06.15
설계사양변경(080008) 근거에 의거	CDH / HSH	KKJ	08.01.18

설계사양변경(060330) 근거에 의거	HEM / HSH	KKJ	06.12.11
설계사양변경(060259) 근거에 의거	CYJ / HSH	KKJ	06.09.22
설계사양변경(060174) 근거에 의거	CYJ / HSW	KKJ	06.06.26
시방변경(060154) 근거에 의거	HKS / HSW	KKJ	06.06.05
시방변경(010184) 근거에 의거	BIN / KO	---	01.11.08
LTR	REVISION RECORD	DR. CHK.	APP. DATE
DR.	BIN, '01.02.01	CHK.	KO, '01. 9.18
CHK.	9/18	APP.	9/19

MATERIAL	PA66	KOREA ELECTRIC TERMINAL CO., LTD.
FINISH	BLACK	
WIRE RANGE		CLASS
INSULATION		TYPE
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1
PART NAME	HEAD LAMP 2P PLUG HOUSING (H9)	
PART NO.	MG612312	