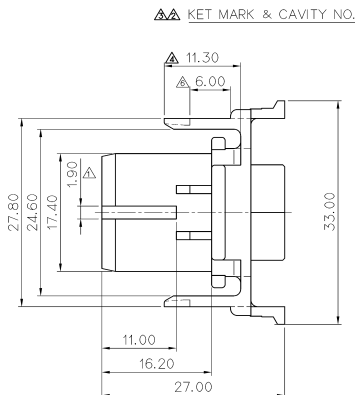




금형 GATE 위치에 따른
RIB 위치가 다른 2종류 제품임

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730525-3

WIRE SEAL : MG680564

3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을것.

2. 적용 TERMINAL : ST730525-3

WIRE SEAL : MG680564

3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



△ 설계사양변경(060330) 근거에 따라	SEM-용	06.12.11	MATERIAL	△ PBT	KET (KOREA ELECTRIC) TERMINAL CO., LTD.	
△ 설계사양변경(060259) 근거에 따라	CYL-HIGH KCU	06.09.22	FINISH	D/GRA		
△ 설계사양변경(060174) 근거에 따라	CYL-HIGH KCU	06.06.26	WIRE RANGE			
△ 시방변경(060154) 근거에 따라	HWS-HSW KCU	06.06.05	INSULATION			
△ 시방변경(010184) 근거에 따라	BVW-KD	01.11.08	SCALE	2/1		
LTR	REVISION RECORD	DR	CHK	APP	DATE	PART NO.
DR.	BIN, '01.02.01	CHK	KO.	'01. 9.18	SEE TABLE	MG612313
CHK.	9/18	APP.		9/19	PART NAME	HEAD LAMP 2P PLUG HOUSING (H11)

△ 설계사양변경(080008) 근거에 따라

08.01.18