
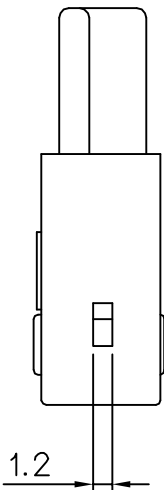
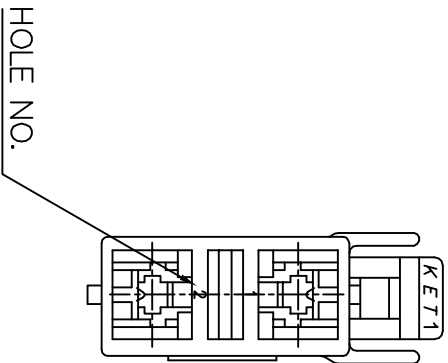
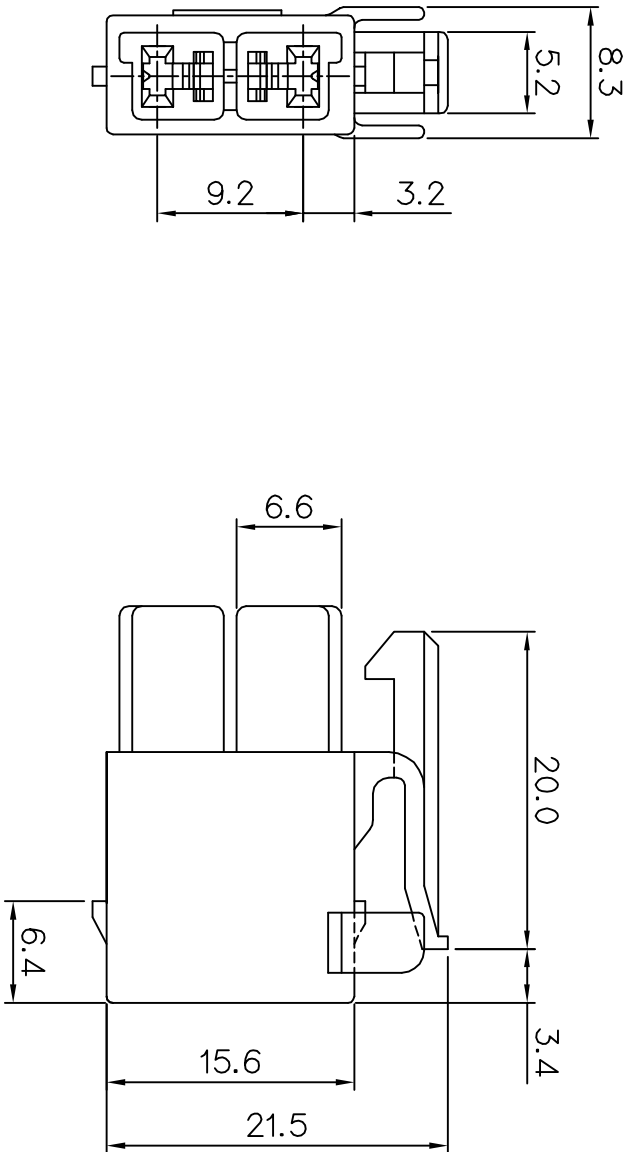


GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST730821, 822, 823, 824
- 3.적용 HOUSING : 6P REC HS'G (MG622537)
- 4.적용 REAR HOLDER : MG631228
- 5.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730821, 822, 823, 824
3. APPLICABLE HOUSING : 6P REC HS'G (MG622537)
4. APPLICABLE REAR HOLDER : MG631228
5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

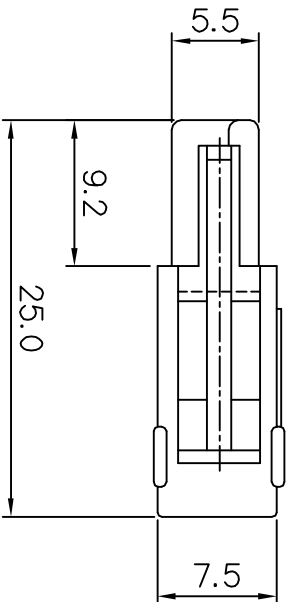

					MATERIAL	PBT(UL V-0)		KIET KOREA ELECTRIC [ENGINEERED] TERMINAL CO., LTD.
					FINISH	RED		
					WIRE RANGE	CLASS 0709		
					INSULATION	TYPE MULTI		
					TOLERANCE EXPERT AS NOTED	SCALE 2/1	PART NO. MG612540-1	
					PART NAME 0709 MULTI 2P PLUG HOUSING(II)			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE			
Δ	설치시공변경 "S110128" 근거 도면 재작성	LCM	KSH		"11.04.28"			
DR.	LSY '03.09.30	CHK.						
CHK.		APP.	Wg		10/7			