
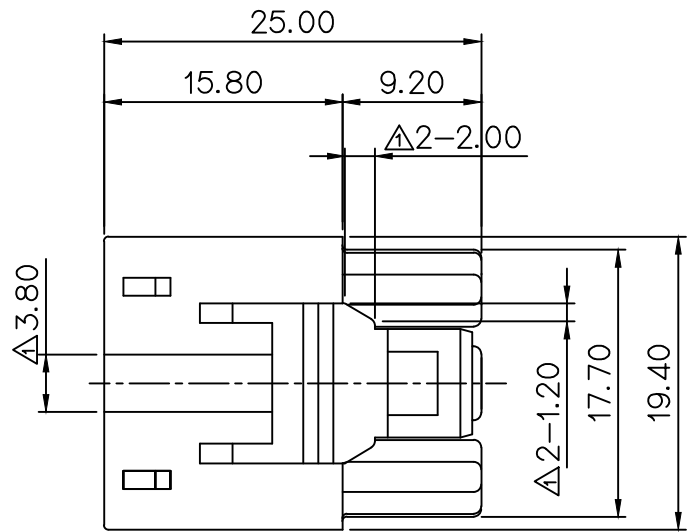
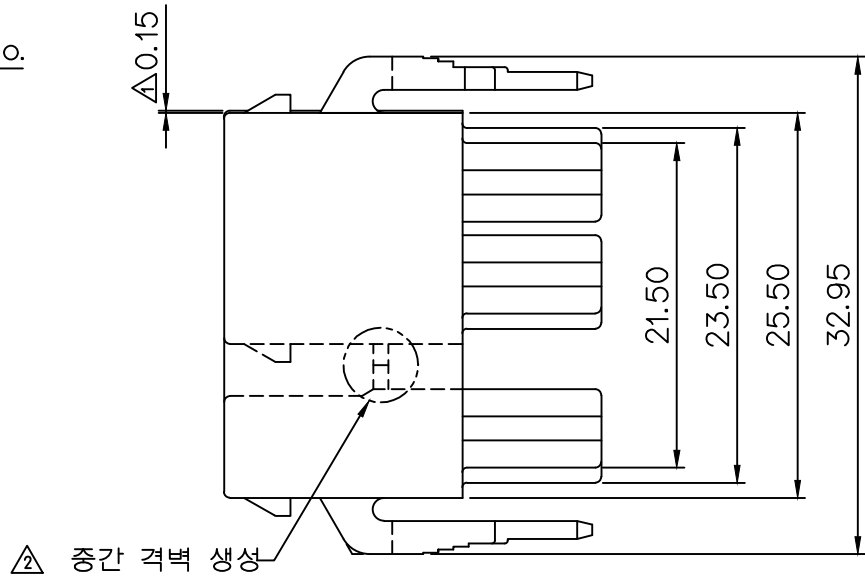


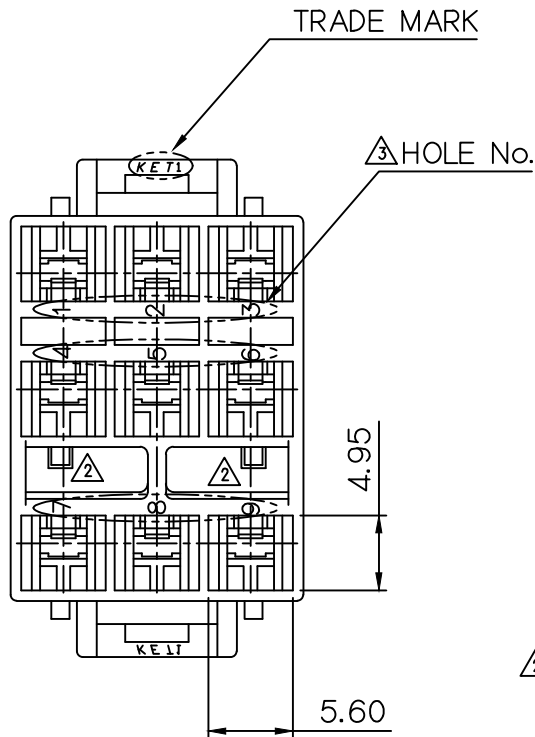

GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1


USED ON

NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730694,695,696,697,872-3
3. APPLICABLE HOUSING : MG622724
4. APPLICABLE R/HOLDER : MG631168-2
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: ST730694,695,696,697,872-3
- 3.적용 HOUSING: MG622724
- 4.적용 R/HOLDER: MG631168-2
- 5.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

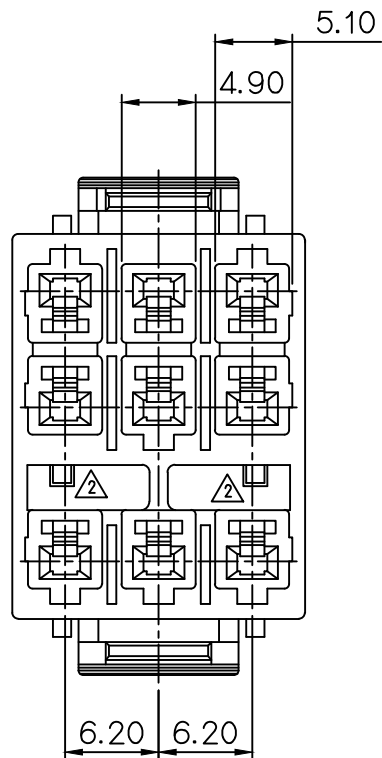

ISSUE MARK

					MATERIAL	PBT	 KOREA ELECTRIC TERMINAL CO., LTD.		
④	설계사양변경서'S110128'근거 도면재작성	KSH	11.04.29		FINISH	NATURAL			
③	시방변경"S090289"의거 도면 재작성	PJM	09.09.30		WIRE RANGE	CLASS			
②	시방변경"S070096"의거 도면 재작성	PJM	07.04.19	CBH	INSULATION	TYPE			
①	시방변경"030138"의거 도면 재작성	LSY	03.08.13						
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO.	MG612725
DR.	LSY 03.01.09	CHK.	1/10			PART NAME	1806 D/L 9P PLUG HS'G		
		APP.	1/10						