



GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	






SECTION A-A

NOTE



- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730775, 776, 777
APPLICABLE HOUSING : MG622949, MG641203
APPLICABLE SPACER : MG631859

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없도록.
- 적용 TERMINAL : ST730775, 776, 777
적용 HOUSING : MG622949, MG641203
적용 SPACER : MG631859

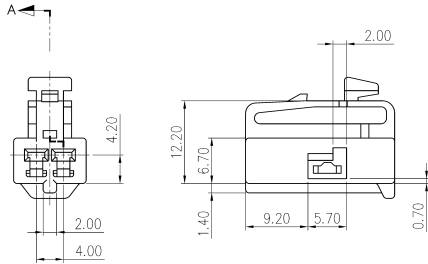

ISSUE MARK



				MATERIAL	PBT	KOREA ELECTRIC TERMINAL CO., LTD.	
				FINISH	NATURAL		
				WIRE RANGE	CLASS		.090
				INSULATION	TYPE		
LTR	REVISION RECORD	DR	CHK	APP.	DATE	SCALE	PART NO.
DR.	WON. 2003.01.10	CHK.				2/1	MG612948
CHK.		APP.					
PART NAME						ASC 2F HOUSING (BOTTOM)	