

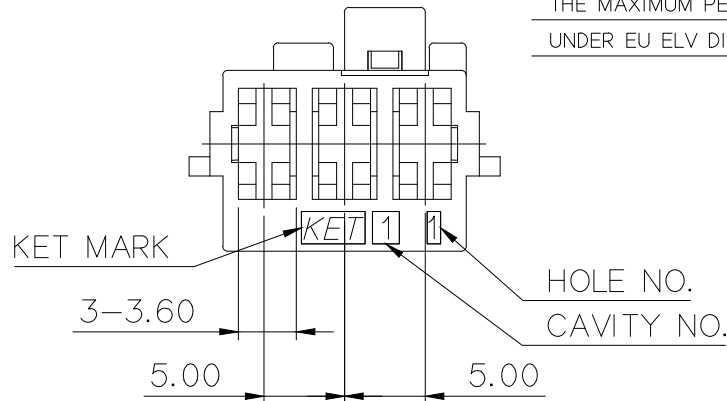
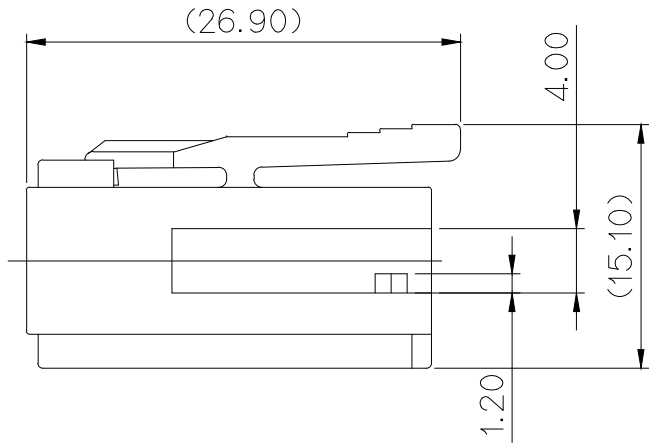
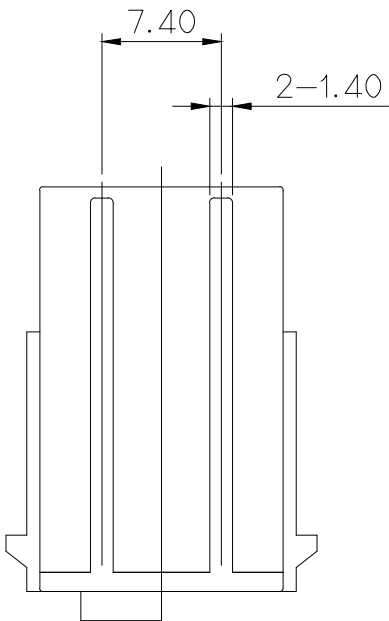
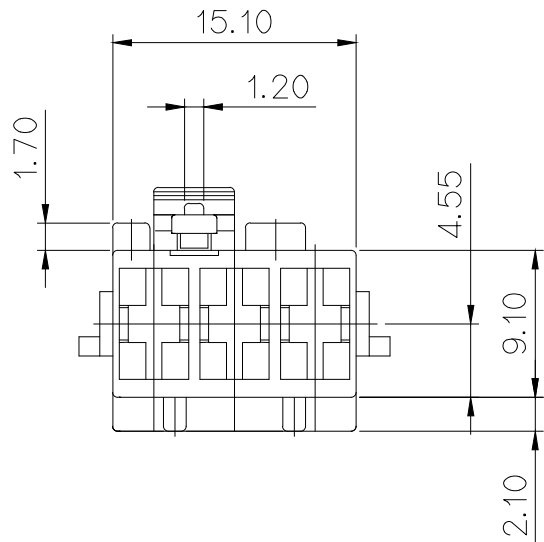


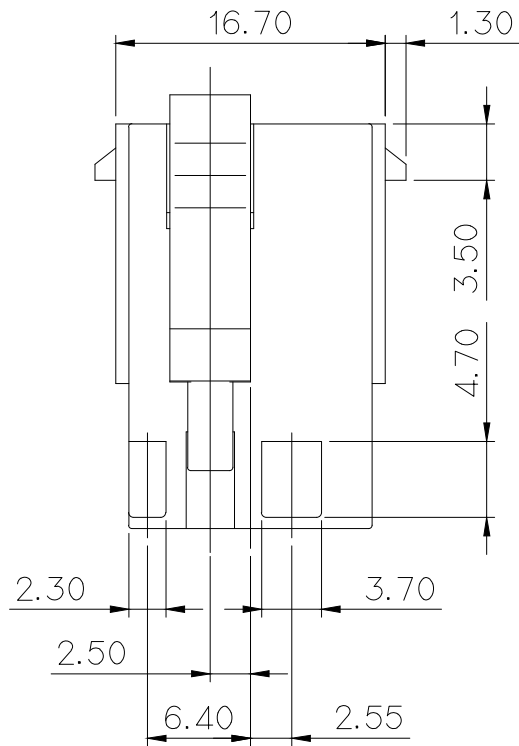

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	



주 기

- 1.지시 하지 않은 반경 R은 0.2-0.3로 한다.
- 2.기능상 유해한 BURR 및 WELD LINE 없을 것.
- 4.적용 TERMINAL: ST730948-3/0993-3/1329-3/1393-3M
적용 R/HOLDER : MG633659-1
- 5.제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2- 0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL: ST730948-3/0993-3/1329-3/1393-3M
APPLICABLE R/HOLDER: MG633659-1
4. 10 HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

PART NO. *표시는 색상 표기 임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

						MATERIAL		PET+PC(G.W.I.T)		 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH		SEE TABLE				
						WIRE RANGE		CLASS				
2	ECO-2102-264	근거 도면 제작성	SCW	PSH	KSH	'21.02.23	INSULATION		TYPE 250 DOOR LOCK			
1	ECO-1711-145	근거 도면 제작성	LCM	KSH	BUC	'17.11.13	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE 2/1	PART NO. MG613040-*03	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NAME					
DR. HAK. '03.09.22			CHK.				250 3F HS'G(L)					
CHK.			APP. 				9/22					