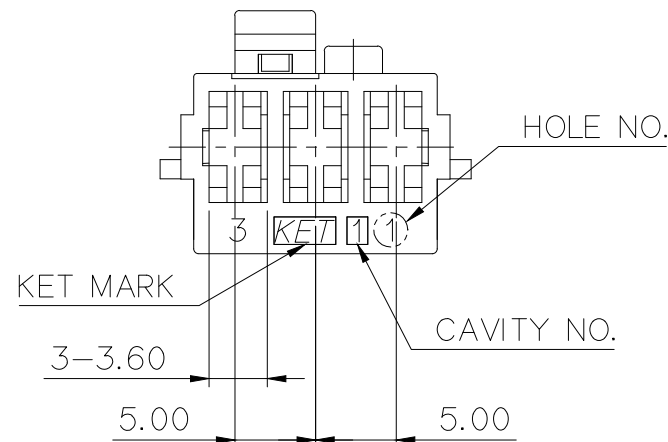
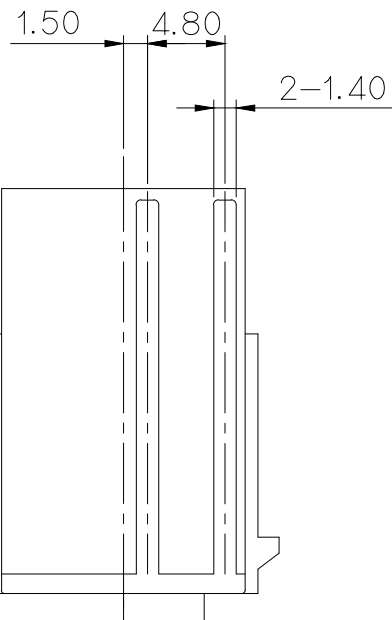


ISOMETRIC VIEW

1. 지시 하지 않는 변경 R은 0.2~0.3로 한다.
2. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
3. 적용 TERMINAL: ST730948-3/0993-3/1329-3/1393-3M
적용 R/HOLDER: MG633659-1
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs
PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용
농도를 초과해서는 안된다.

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.2–0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL: ST730948–3/0993–3/1329–3/1393–3M
APPLICABLE R/HOLDER: MG633659–1
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM,
HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED
THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER
EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

*

						MATERIAL PET+PC(G.W.I.T)  KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE	
						WIRE RANGE CLASS	
						INSULATION TYPE 250 DOOR LOCK	
△	ECO-1711-145 근거 도면 재 작성	LCM	KSH	BUC	'17.11.13	TOLERANCE EXCEPT AS NOTED SEE TABLE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE	PART NO.
DR. HAK. '03.09.22		CHK.				2/1	MG613041T-*03
CHK.		APP.  9/22				PART NAME	
						250 3F (R) HOUSING	