
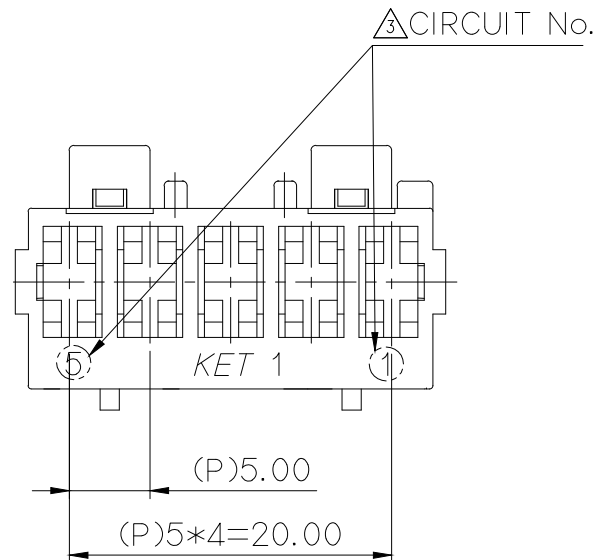
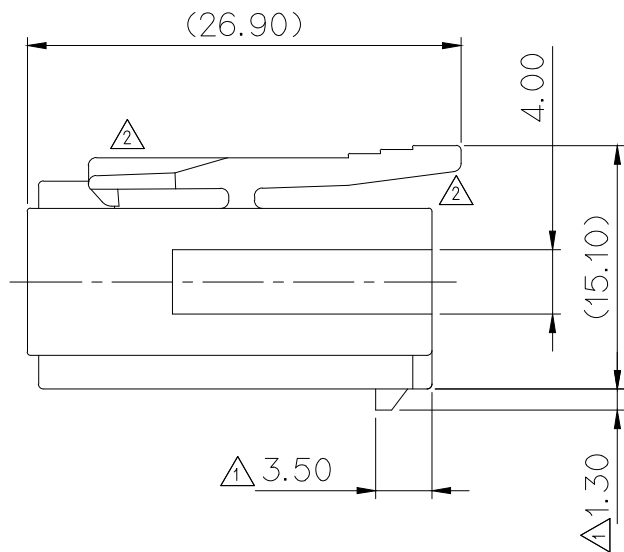
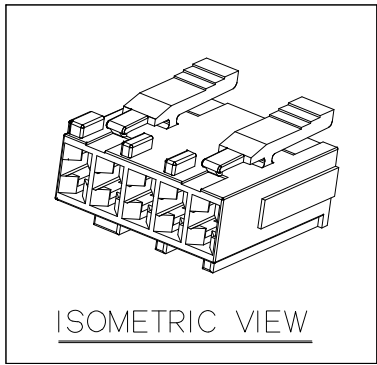
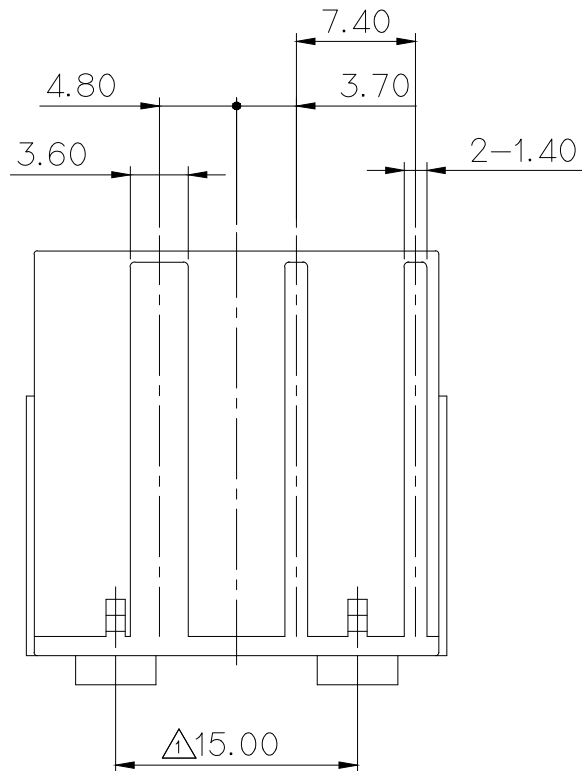
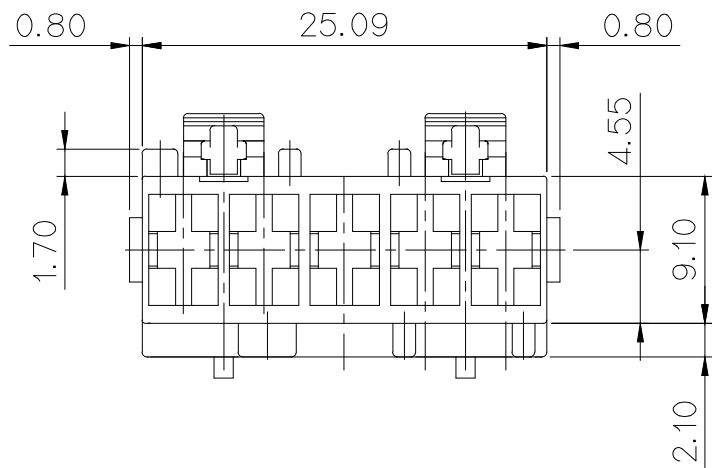


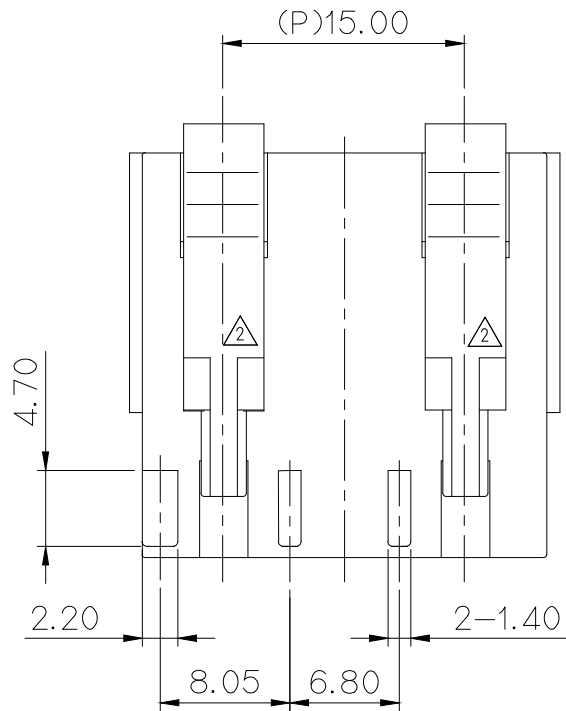

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730948-3/993-3
APPLICABLE R/HOLDER : 633661-1
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

NO.	MATERIAL	COLOR
0	Δ PA66 (V0)	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 터미널 : ST730948-3/993-3
적용 R/HOLDER : 633661-1
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

△5	ECO-1110-068 근거 도면 재작성	PJM	KSH	7/1	'11.10.14	MATERIAL PA66(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.
△4	설계사양변경(S110128)근거 도면 재작성	PJM	KSH	7/1	'11.04.28	FINISH NATURAL		
△3	설계사양변경(S100095)근거 도면 재작성	7/1	7/1	7/1	'10.04.22	WIRE RANGE		
△2	설계사양변경(S090137)근거 도면 재작성	PJM	7/1	7/1	'09.06.02	INSULATION		
△1	D/L기능을 위한 돌기추가 (S050074)	7/1	7/1	7/1	'05.04.04	CLASS		TYPE 250 DOOR LOCK
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	
DR. HAK. '03.09.15		CHK.		PART NAME				
CHK.		APP.		250 5F HOUSING				