



SECTION A-A

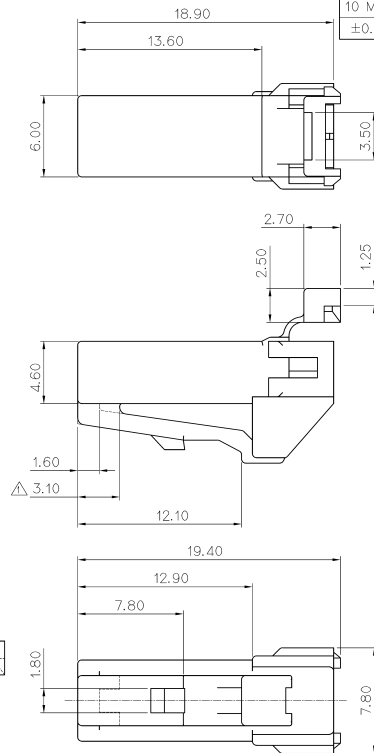

GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1

USED ON



주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을것.
2. 적용 REC. TERMINAL : ST730517

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE REC. TERMINAL : ST730517



ISSUE MARK

						MATERIAL	HPA		 KOREA ELECTRIC TERMINAL CO., LTD.					
						FINISH	NATURAL							
						WIRE RANGE		CLASS		SP				
						INSULATION		TYPE		7183-6085				
△	설계사명번(주소: S06028028)2번기 수증				PSH	9/7	06.10.27							
LTR	REVISION RECORD				DR	CHK	APP	DATE	FOR NAME AS NOTED	SEE TABLE	SCALE	4/1	PART NO.	MG613140
DR.	LSY. 03.09.26				CHK	9/7	9/27	PART NAME		SP 2P PLUG HOUSING (HINGE TYPE)				
					APP	9/28	9/27							



설치시연결선(S060282)과 수형

PSH

%

06.10.27

LTR

REVISION RECORD

DR

CHK

APP.

DATE

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27

9/27