

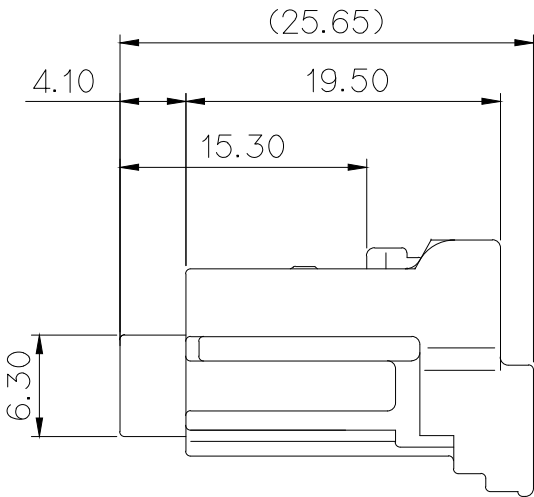


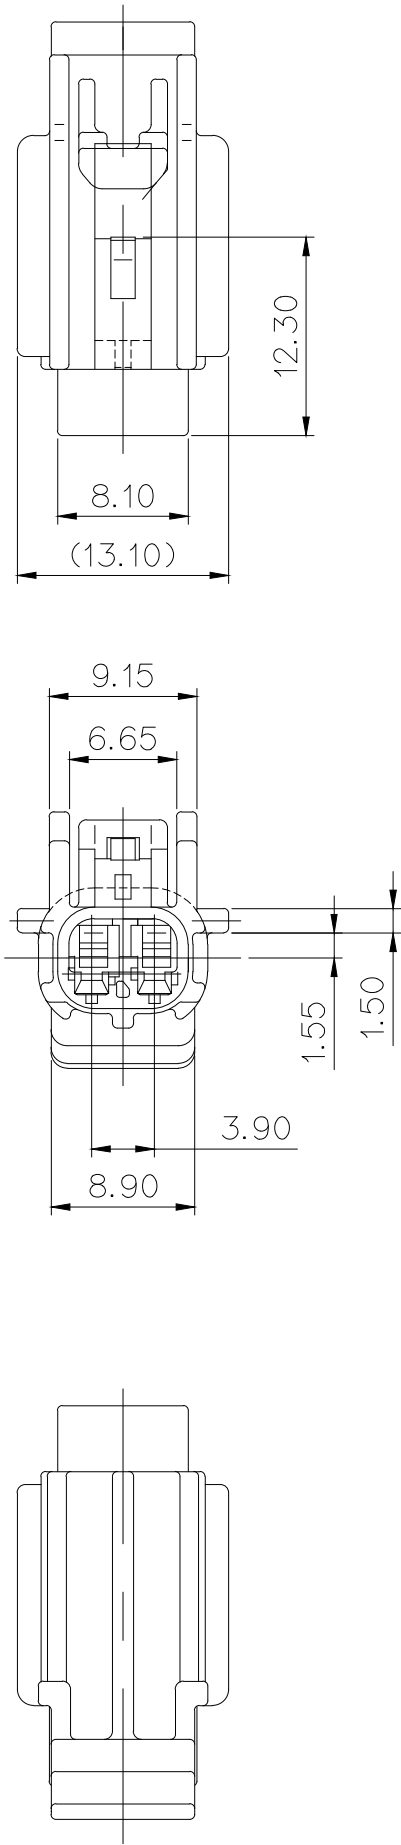

△	NO.	MATERIAL	COLOR
*	0	P B T	NATURAL
	1		RED
	2		BLUE
	20		JADE
	3		YELLOW
*	4		GRAY
	40		DARK GRAY
*	41		LIGHT GRAY
	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE



GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 지시없는 R는 전부0.3으로 한다.
- 기능상 유해한 BURR,변형등이 없을것.
- 적용 부품 : TERMINAL-ST730924/ST730925

F/HOLDER-MG633217

- △4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- MUST BE FREE OF BURR,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE PART : TERMINAL-ST730924/ST730925

F/HOLDER-MG633217

- △4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

						MATERIAL	PBT	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	△SEE TABLE		
						WIRE RANGE		CLASS	91RK (040 WP)
						INSULATION		TYPE	7183-7770-40
△	ECO-1501-233	근거	도면	변경	JH.K	KMH	LSY	15.01.19	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1
DR.	HEO S.H	04.8.23	CHK.				PART NAME	RK 2P FEMALE HS'G(RK02FGY)	
CHK.	KKJ	8/23	APP.	KCH	8/23				

ISSUE MARK