


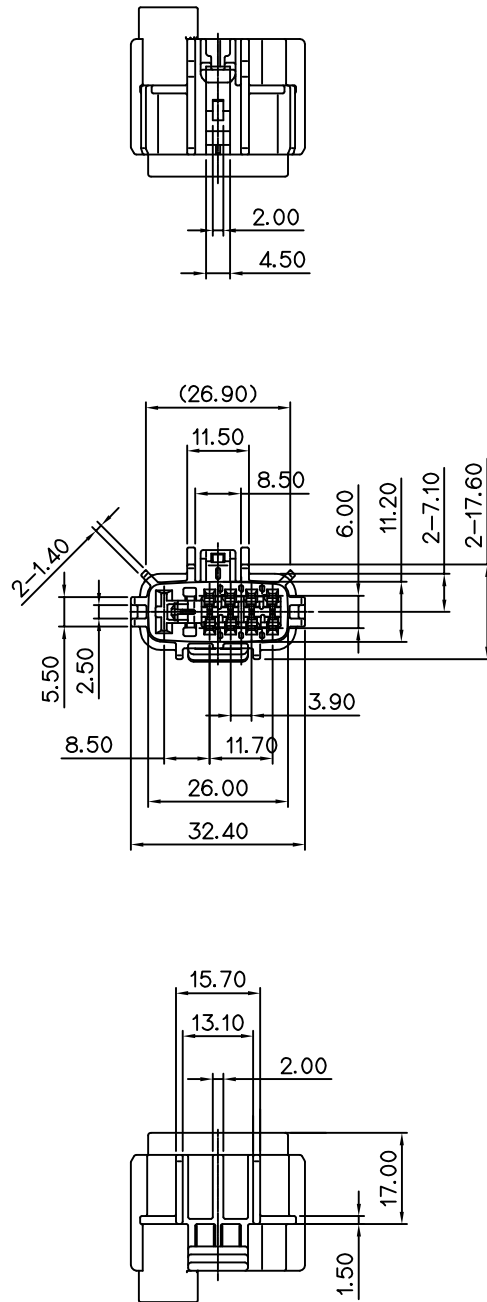



GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	MG633235
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 미성형이 없을것.
2. 적용 TERMINAL NO. : ST730924/ST730925
3. 적용 F/HOLDER. : MG633235

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL NO. : ST730924/ST740925
3. APPLICABLE F/HOLDER : MG633235



ISSUE MARK

						MATERIAL PBT		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH L/GRAY			
						WIRE RANGE			CLASS
						INSULATION			TYPE 7183-7397-40
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG613234
DR.	HEO S.H	04.8.23	CHK.				PART NAME		
CHK.	8/23		APP.		8/23		HYBRID WP 9P FEMALE HS'G(RK08FGY+X1)		