



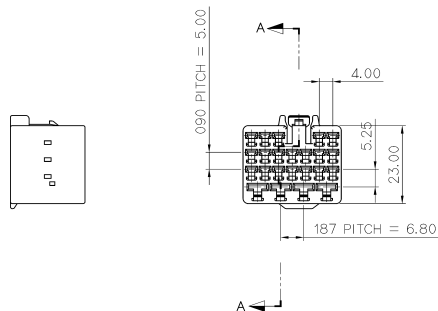


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



SECTION A-A




주 기

- 1. 기능상 유해한 BURR 및 WELDLINE 등이 없을것.
- 2. 적용 TERMINAL: 090 - ST730775, 776, 777
- 적용 TERMINAL: 187 - ST730644, 645, 646
- 적용 HOUSING: MG623341
- 적용 SPACER: MG632470

NOTE

- 1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE TERMINAL: 090 - ST730775, 776, 777
- APPLICABLE TERMINAL: 187 - ST730644, 645, 646
- APPLICABLE HOUSING: MG623341
- APPLICABLE SPACER: MG632470



ISSUE MARK

MATERIAL		PBT		KOREA ELECTRIC TERMINAL CO., LTD.			
FINISH		YELLOW					
WIRE RANGE				CLASS .090 II & .187 II			
INSULATION				TYPE HYBRID			
LTR	REVISION RECORD	DR	CHK	APP.	DATE	SCALE 1/1	PART NO. MG613342
DR.	KD.J '04.10.14	CHK.		APP.		PART NAME	1809 23F HOUSING (NEW)
CHK.		APP.					