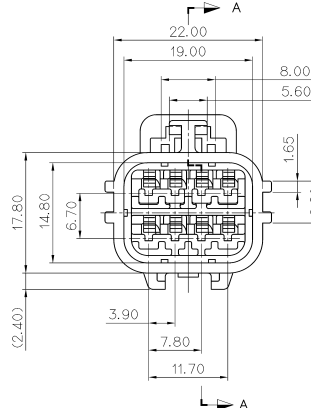





GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

주 기

1. 지시없는 R는 전부0.3으로 한다.
 2. 기능상 유해한 BURR, 변형등이 없을것.
 3. 적용 HOUSING : MG643380
- 적용 TERMINAL : ST740926/ST740927
- 적용 F/HOLDER : MG633408

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
 2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 3. APPLICABLE HOUSING : MG643380
- APPLICABLE TERMINAL : ST740926/ST740927
- APPLICABLE F/HOLDER : MG633408



ISSUE MARK

				MATERIAL	SEE TABLE	KET KOREA ELECTRIC (ENGINEERED) TERMINAL CO., LTD.						
				FINISH	SEE TABLE							
				WIRE RANGE	CLASS		RK(040WP)					
				INSULATION	TYPE		7182-7876-30					
LTR	REVISION RECORD			DR	CHK	APP	DATE	TOLERANCE REVIEW AS NOTED	SEE TABLE	SCALE	PART NO.	
DR	KDJ '07.03.13			CHK						2/1		MG613406
CHK				APP					PART NAME	RK 8M HOUSING (RK08MB)		