


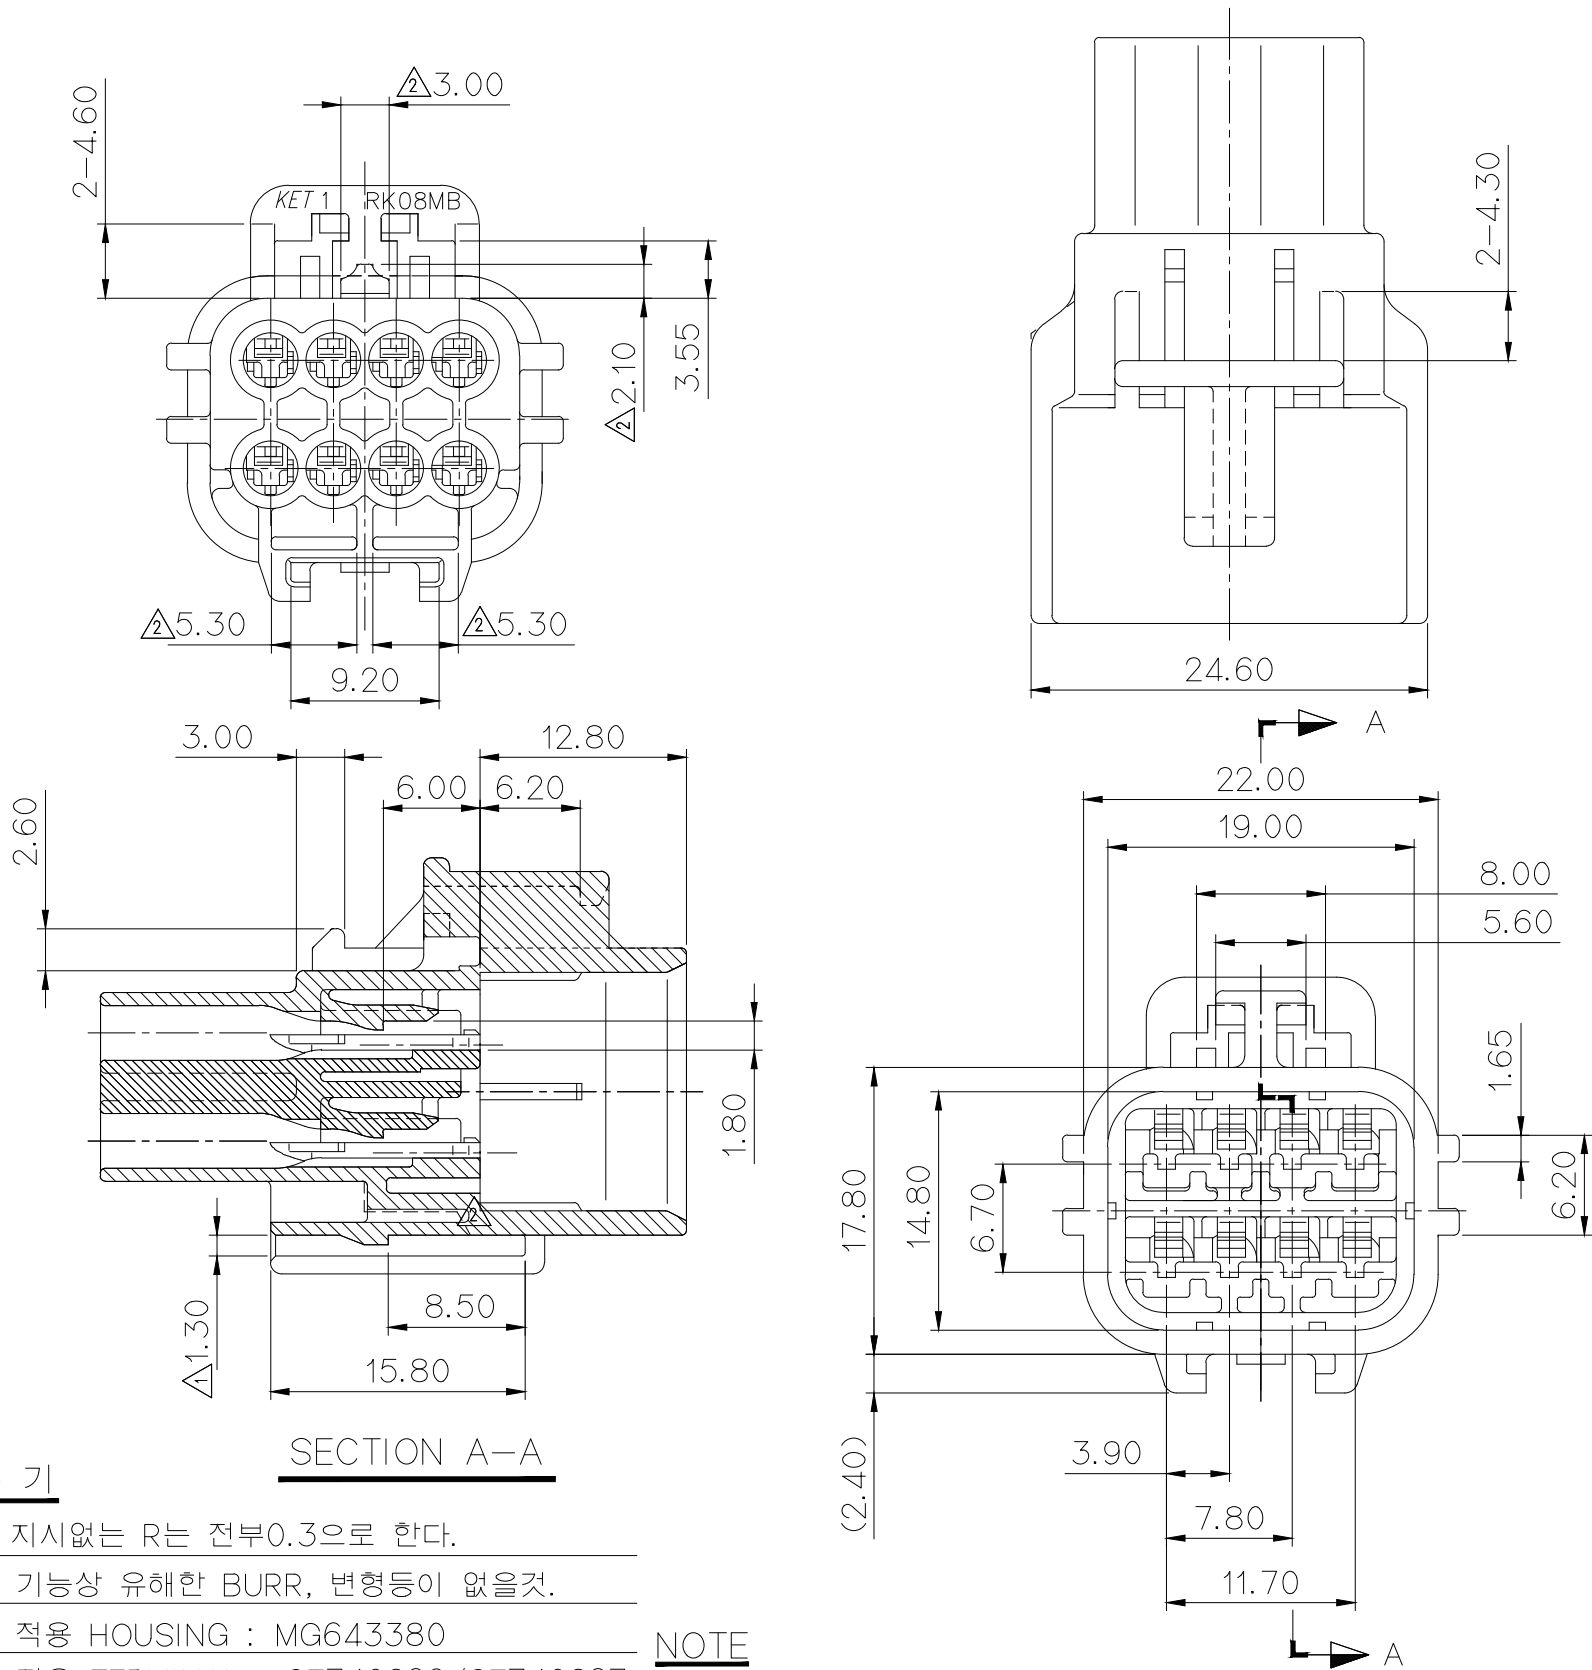


주 기

- 지시없는 R는 전부0.3으로 한다.
- 기능상 유해한 BURR, 변형등이 없을것.
- 적용 HOUSING : MG643380
적용 TERMINAL : ST740926/ST740927
적용 F/HOLDER : MG633408
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴, 6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG643380
APPLICABLE TERMINAL : ST740926/ST740927
APPLICABLE F/HOLDER : MG633408
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,CADMIUM,HEXAVALENT CHROMIUM, PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

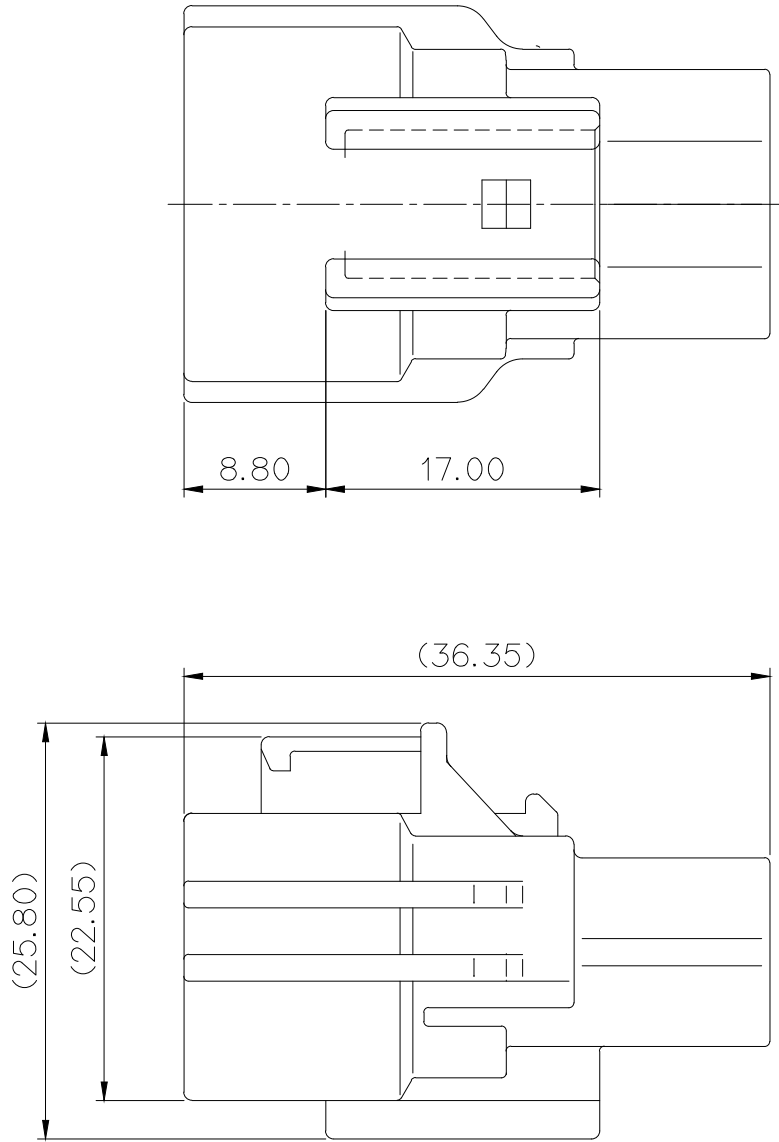

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE			
						WIRE RANGE		CLASS	RK(O40WP)
						INSULATION		TYPE	7182-7876-30
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG613406
DR.	KDJ '07.03.13		CHK.	HSH		3/19	PART NAME RK 8M HOUSING (RK08MB)		
CHK.			APP.	KKJ		3/20			

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK