


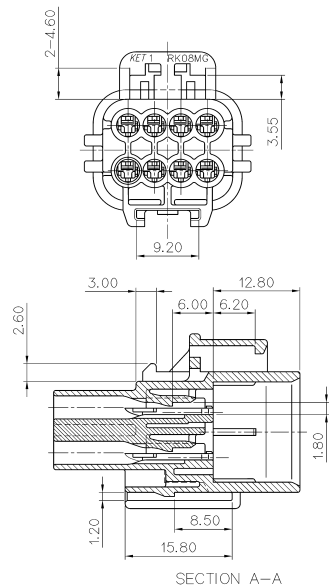


SECTION A-A

주 기



1. 지시없는 R는 전부 0.3으로 한다.
2. 기능상 유해한 BURR, 변형등이 없을것.
3. 적용 HOUSING : MG643383
적용 TERMINAL : ST740926/ST740927
적용 F/HOLDER : MG633408

NOTE


1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING : MG643383
APPLICABLE TERMINAL : ST740926/ST740927
APPLICABLE F/HOLDER : MG633408

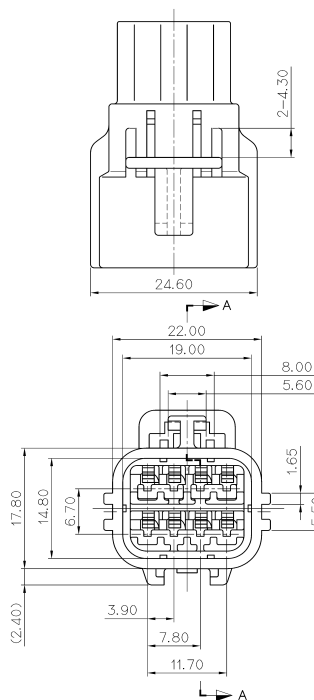

GENERAL TOLERANCE (HOUSING)								USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT		
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		



NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE



ISSUE MARK

				MATERIAL	SEE TABLE	 KET KOREA ELECTRIC TERMINAL CO., LTD.	CLASS RK(040WP)
				FINISH	SEE TABLE		
				WIRE RANGE			
				INSULATION			
LTR	REVISION RECORD	DR	CHK	APP	DATE	TYPE	PART NO.
DR	KDJ '07.03.13	CHK				7182-7878-60	MG613407
CHK		APP					
PART NAME						SCALE 2/1	
RK 8M HOUSING (RK08MG)							