


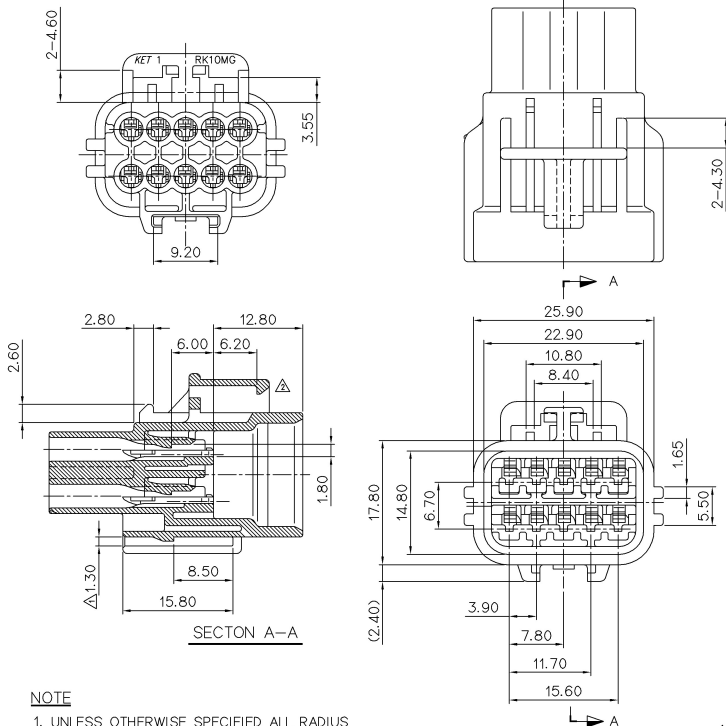



SECTION A-A

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG643385
APPLICABLE TERMINAL : ST740926/ST740927
APPLICABLE F/HOLDER : MG633410
- HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



주 기

- 지시없는 R는 전부 0.3으로 한다.
- 기능상 유해한 BURR, 변형등이 없을 것.
- 적용 HOUSING : MG643385
적용 TERMINAL : ST740926/ST740927
적용 F/HOLDER : MG633410
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
* 8		LIGHT GREEN
9		MAGENTA
11		ORANGE

ISSUE MARK

						MATERIAL	SEE TABLE	KET [ENGINEERED]	KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	SEE TABLE		
						WIRE RANGE		CLASS	RK(O40WP)
						INSULATION		TYPE	7182-7972-60
						TOLERANCE AT MEAS	SEE TABLE	SCALE	2/1
						REVISION RECORD	DR. CHK. APP. DATE	PART NO.	MG613409
						DR. KDJ '07.03.13	CHK. APP. 3/19	RK 10M HOUSING (RK10MG)	
						CHK. APP. 3/20	PART NAME		