
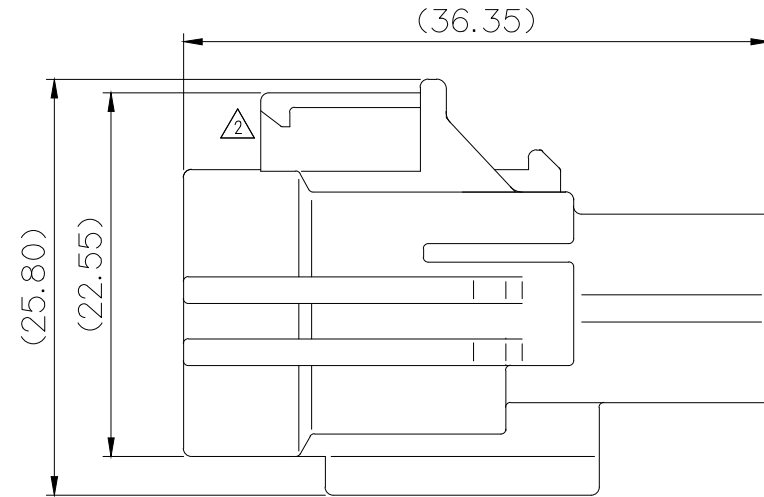
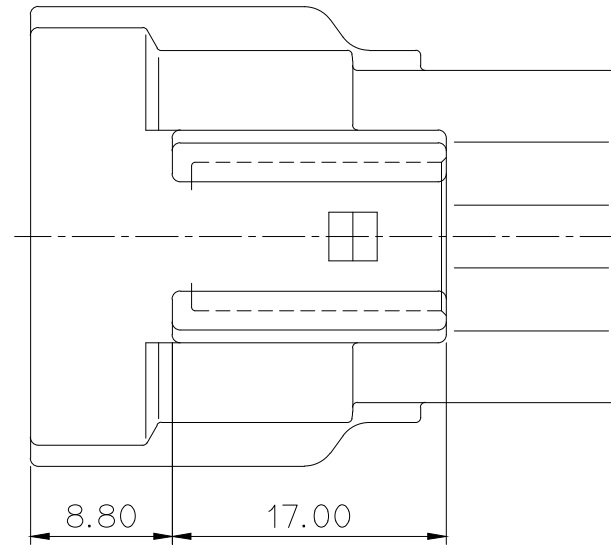
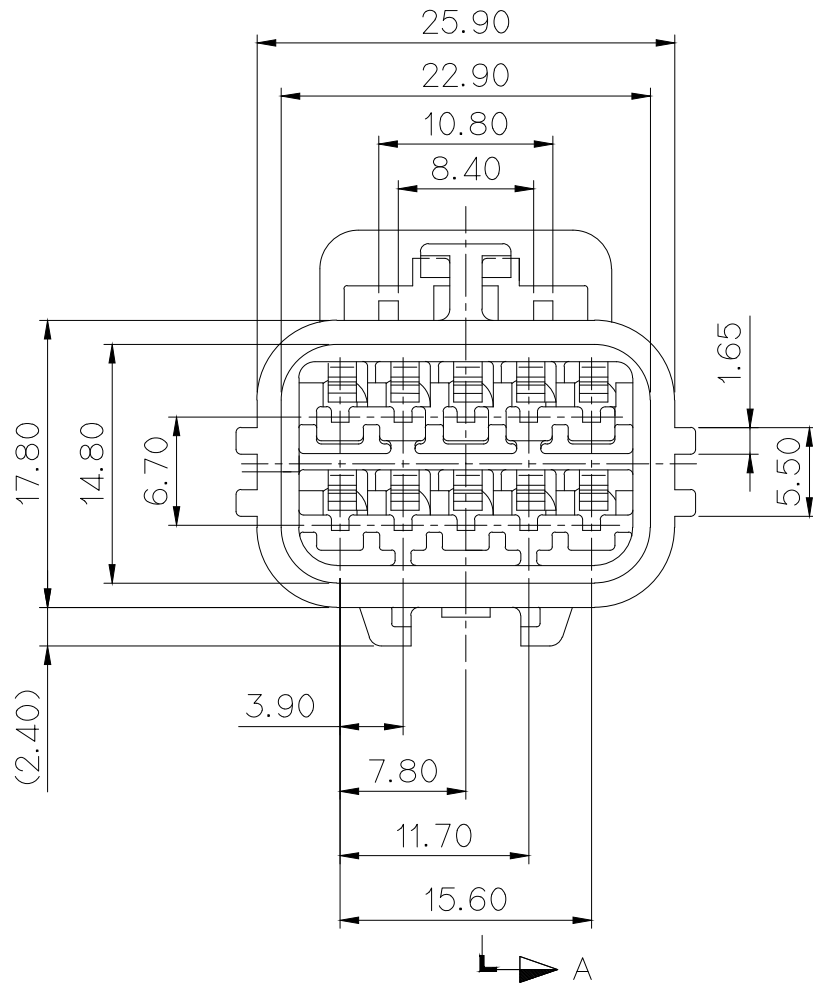
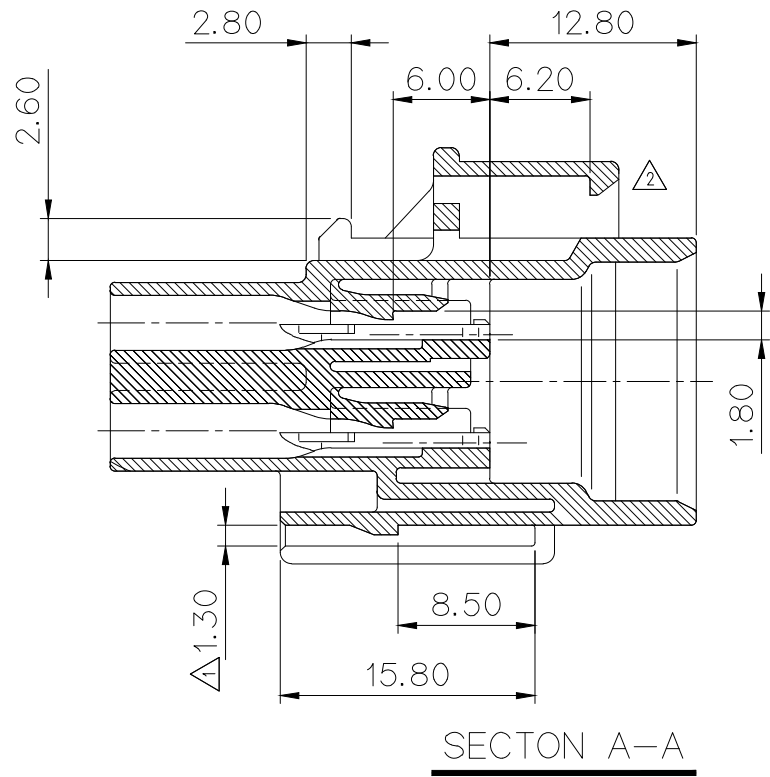
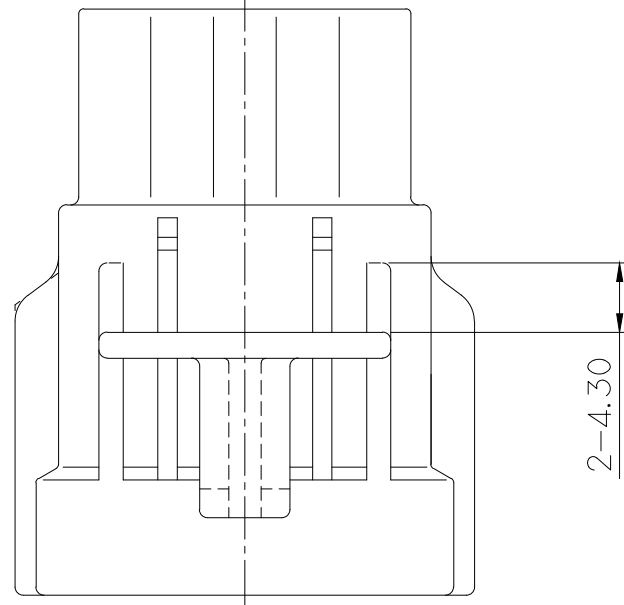


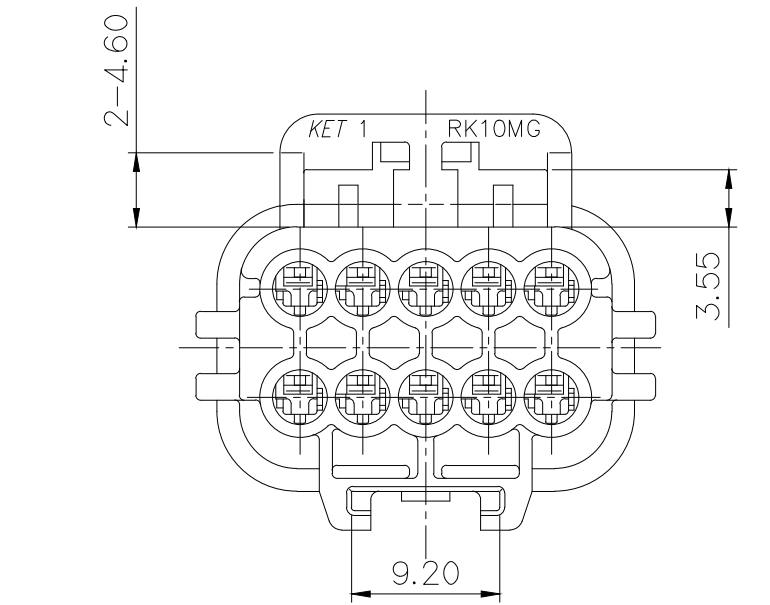

주 기

1. 지시없는 R는 전부0.3으로 한다.
2. 기능상 유해한 BURR, 변형등이 없을 것.
3. 적용 HOUSING : MG643385
적용 TERMINAL : ST740926/ST740927
적용 F/HOLDER : MG633410
- △ 6. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING : MG643385
APPLICABLE TERMINAL : ST740926/ST740927
APPLICABLE F/HOLDER : MG633410
- △ 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
* 4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
* 8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Development Team 1

ISSUE MARK

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE TABLE				
	설계사양변경(S080176)근거 도면 재작성 (LOCK부 형상 변경)	KMH			'08.07.07	WIRE RANGE	CLASS RK(O40WP)		
	설계사양변경(S070133)근거 도면 재작성	KBS			'07.06.05	INSULATION	TYPE 7182-7972-60		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR. KDJ '07.03.13		CHK.				3/19	SEE TABLE	2/1	MG613409
CHK.		APP.				3/20	PART NAME RK 10M HOUSING (RK10MG)		