
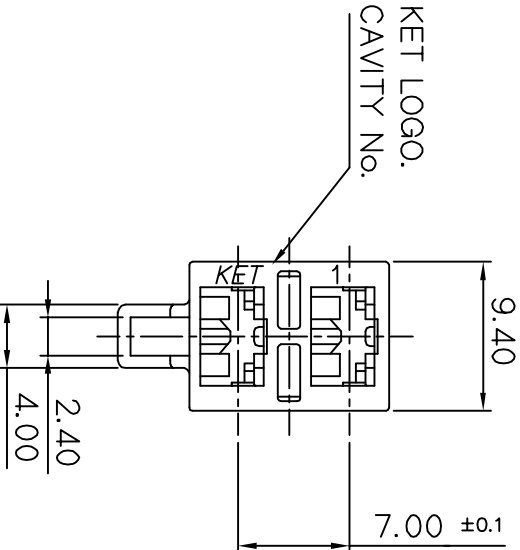
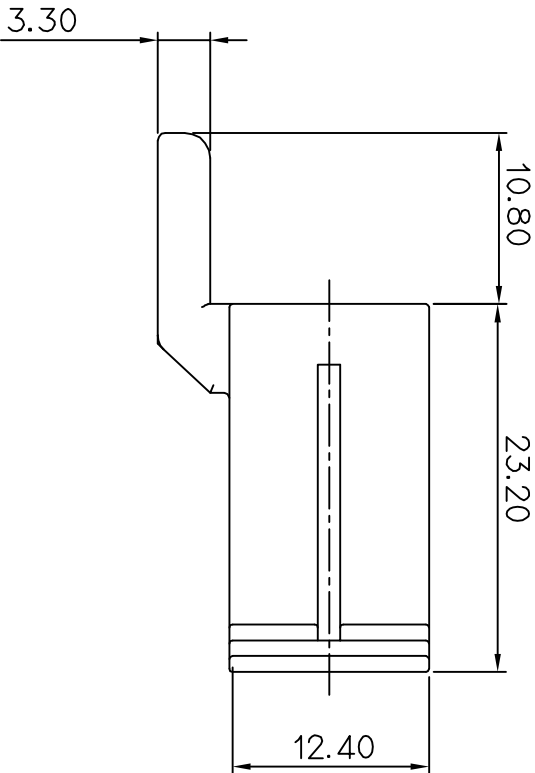
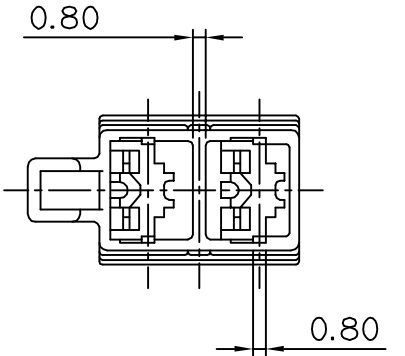



(DIMENSIONS IN MM)

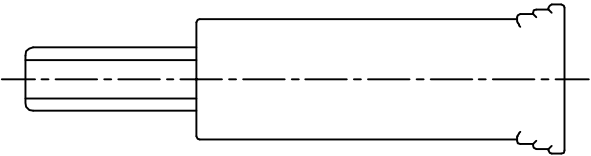

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30°	0.1	

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE TERMINAL : ST730567, 8, 9
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBS,PBDES) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

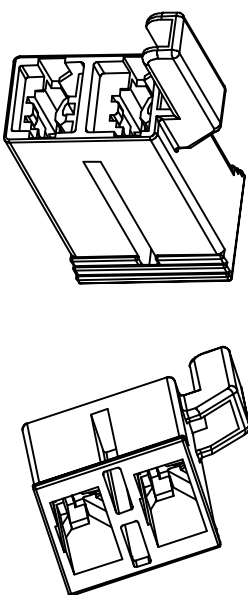

ISOMETRIC VIEW

주 기

1. 지시하지 않은 반경 R은 0.3으로 한다.
2. 지시하지 않은 모따기 C는 0.3으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
4. 적용 단자 : ST730567, 8, 9
5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDES)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK

						MATERIAL	PBT(VO)	KIEIT ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	NATURAL		
						WIRE RANGE			
						INSULATION			
L7R	REVISION RECORD			DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		
DR. HAK.	2004.11.04	CHK.				SEE TABLE	SCALE 2/1	PART NO.	
CHK.	11.04	APP.				PART NAME		HEATER 2F HOUSING	