


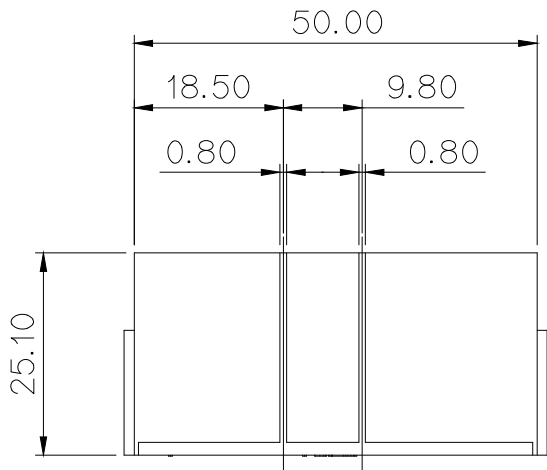
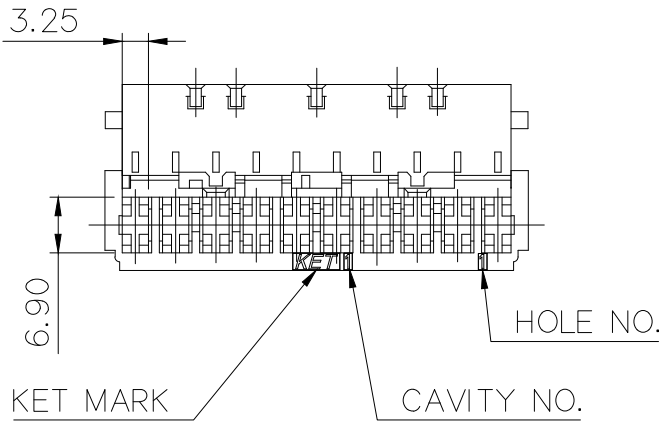



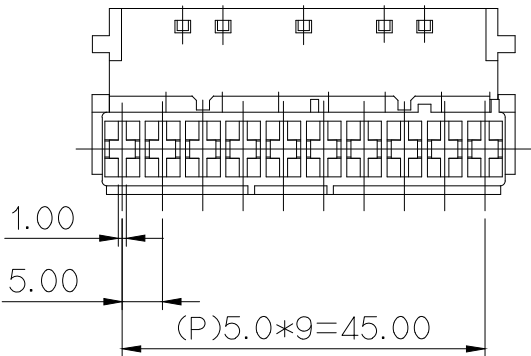

1. 지시 하지 않은 변경 R은 0.2-0.3로 한다.
2. 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
3. 적용 TERMINAL: ST730948-3/0993-3/1329-3/1393-3M
4. 제품에 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,PBBs
PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용
농도를 초과해서는 안된다.

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2– 0.3 RADIUS.
2. MUST BE FREE OF BURR, WELD LINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL: ST730948–3/0993–3/1329–3/1393–3M
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,CADMIUM, HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



*

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

						MATERIAL PET+PC(G.W.I.T) FINISH SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.
						WIRE RANGE CLASS .250		
						INSULATION TYPE 250 DOOR LOCK		
△	ECO-1711-145근거 도면 재작성	LCM	KSH	BUC	'17.11.13			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 1/1	PART NO. MG613683FT-*10
DR. SMG. '17. 03. 29		CHK. PSH. '17. 03. 29		PART NAME				
CHK. KSH. '17. 03. 29		APP. BUC. '17. 03. 29		250 10F HOUSING				

APPROVED

2019-11-05

**KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team**

ISSUE MARK