
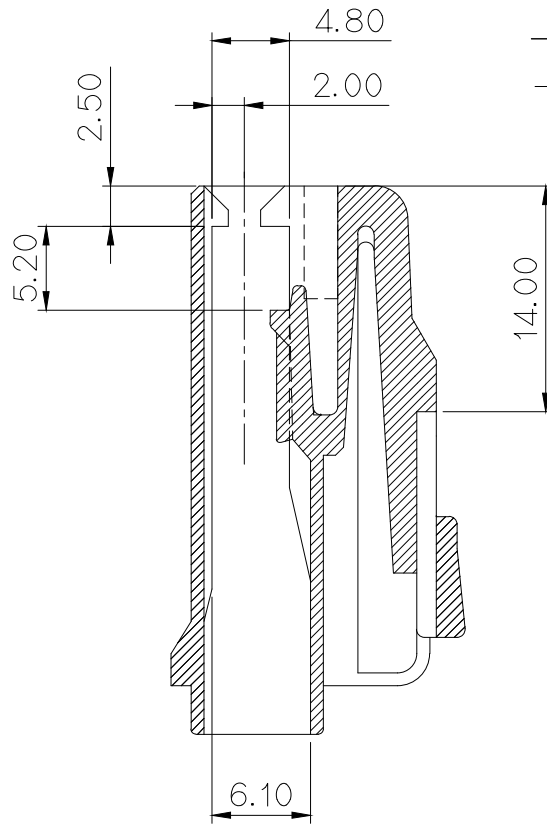
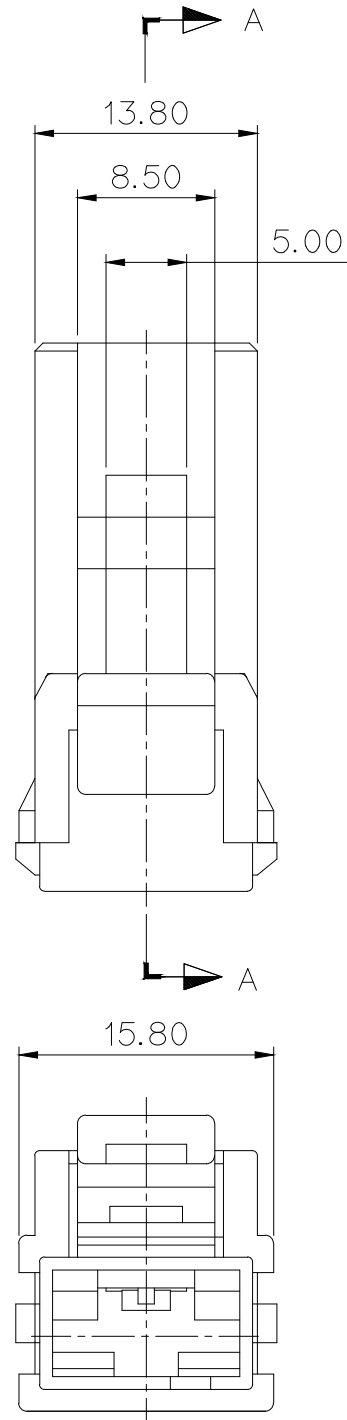



주 기

1. 지시하지 않은 모서리반경 (R)은 0.5
2. 기능상 유해한 BURR 및 변형등이 없을 것.
3. 적용 TERMINAL : ST730722-3, ST730723-3,
△ST731529-3
4. 적용 REAR HOLDER : MG630660
5. 적용 HOUSING : MG623688
6. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

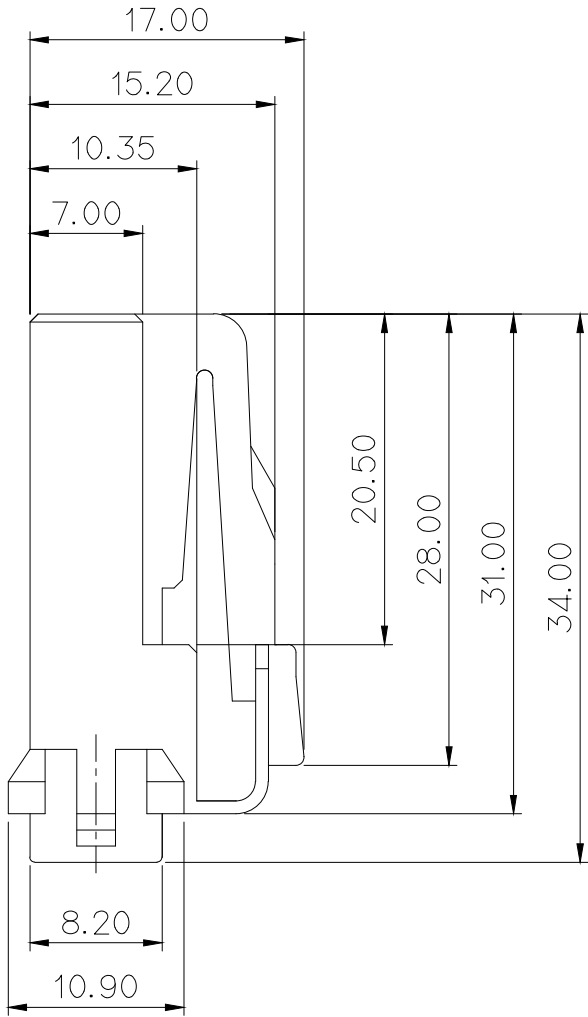

SECTION A-A

GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.5 RADIUS
2. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL: ST730722-3, ST730723-3
△ST731529-3
4. APPLICABLE R/HOLDER : MG630660
5. APPLIACBLE HOUSING : MG623688
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD
MERCURY, CADMIUM, HEXAVALENT CHROMIUM,
PPBs, PPDEs) SHALL NOT EXCEED THE MAXIMUM
PERMISSIBLE CONCENTRATION PRESCRIBED
UNDER EU ELV DIRECTIVE & RoHS REGULATION.


△	NO.	MATERIAL	COLOR
*	0	NYLON	NATURAL
	1		RED
	2		BLUE
	20		JADE
	3		YELLOW
*	4		GRAY
	40		DARK GRAY
	41		LIGHT GRAY
	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

APPROVED

2021-10-21

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH SEE TABLE			
					WIRE RANGE		CLASS .375	
	ECO-2108-308 근거 도면 변경 (ISO 4.0SQ 단자 품번 추가)	LND —	HYJ	'21.08.27	INSULATION		TYPE 7123-4113-30	
	ECO-1505-341 근거 도면 재작성 (컬러 테이블 추가)	KCS HYJ	LSY	'15.05.29	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO. MG613689
LTR	REVISION RECORD	DR.	CHK.	APP.				
DR. CJH 05.09.08		CHK. 정요승 05.09.22			PART NAME 375 1F HOUSING			
CHK. HSH 05.09.22		APP. KKJ 05.09.26						