
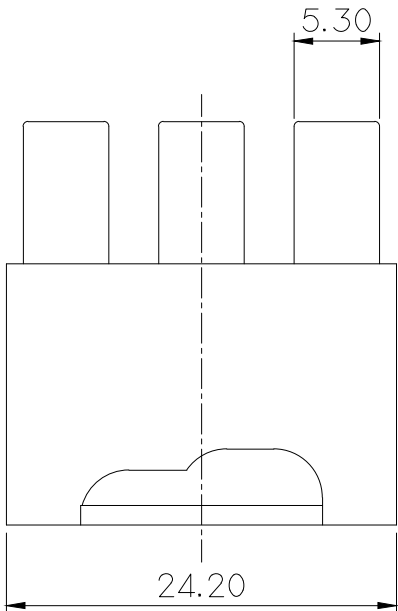
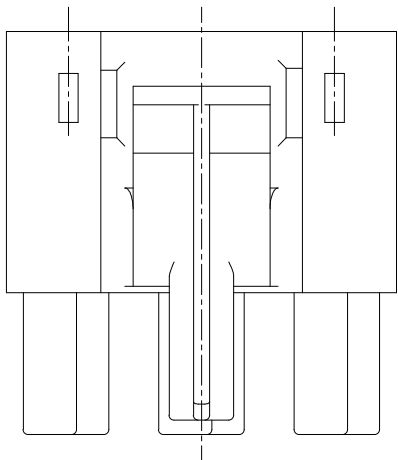
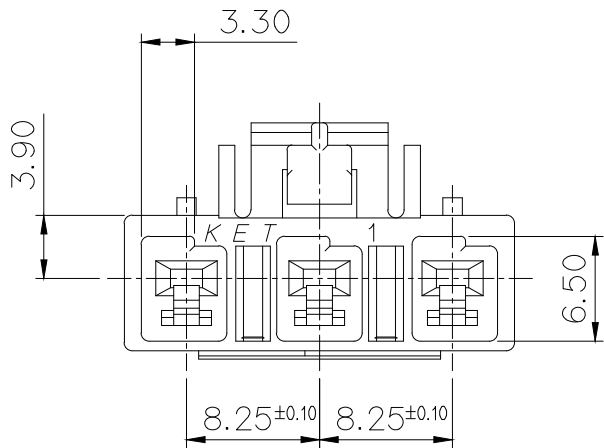


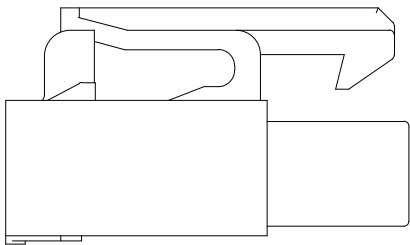

NO.	COLOR
0	NATURAL
* 1	RED
* 2	BLUE
3	YELLOW
5	BLACK
8	GREEN

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	0.1	


주 기

1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.



2.적용 TERMINAL: ST730841-3, 842-3

3.적용 HOUSING: MG631230-5

4.제품 내 함유 된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBS, PBDEs, DHEP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안 된다.

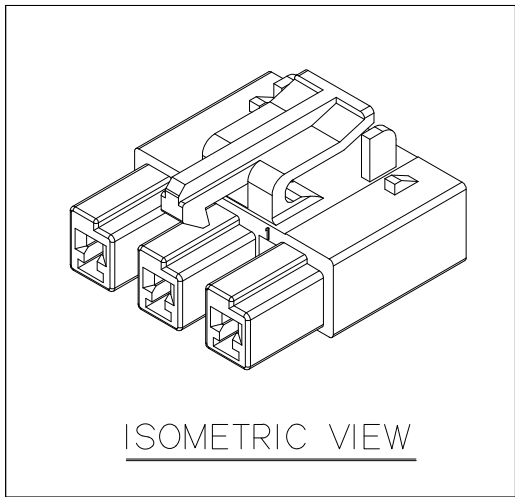

ISOMETRIC VIEW

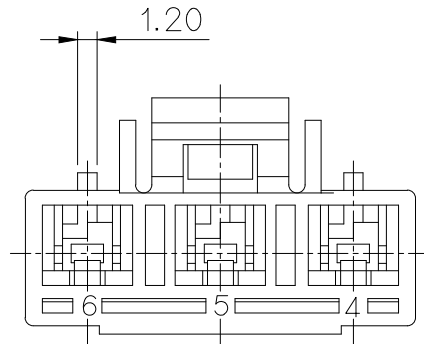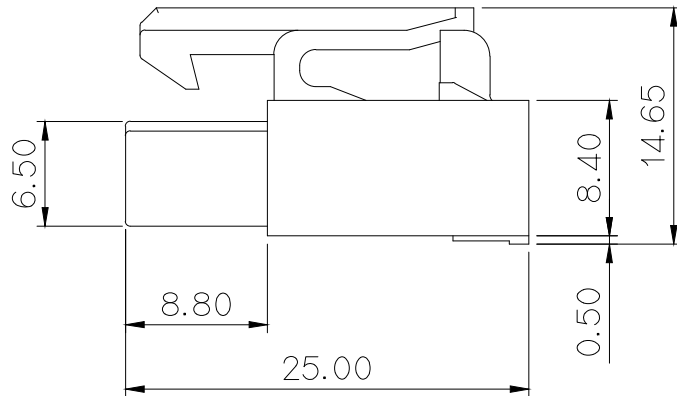

NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE

AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE TERMINAL : ST730841-3, 842-3

3. APPLICABLE HOUSING : MG631230-5


4. 10HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2021-11-03

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	PBT(V0)	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE		CLASS MULTI
					INSULATION		TYPE
2	ECO-2104-249근거 도면 제작성	SCW	PSH	KSH	'21.04.22		
1	설계사양변경(S110128)근거 도면 제작성	DR.	CHK.	APP.	'11.04.28		
LTR	REVISION RECORD					TOLERANCE EXCEPT AS NOTED	
	DR. HAK.'2005.09.08	CHK.				SCALE 2/1	PART NO. MG613699
CHK.		APP.				PART NAME MULTI 3F(B) HOUSING	