


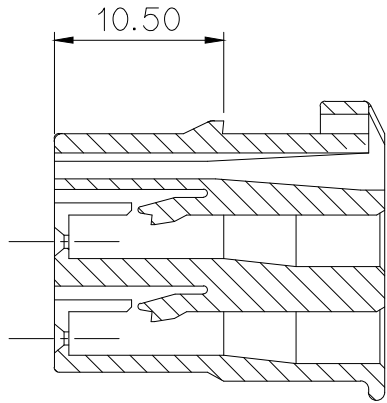

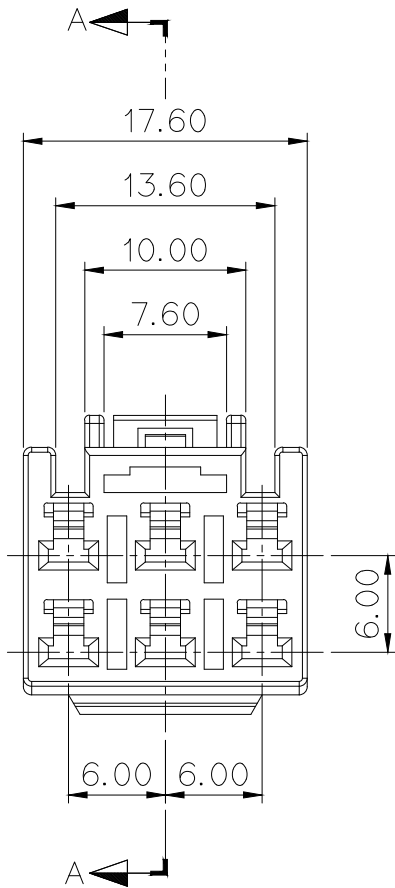
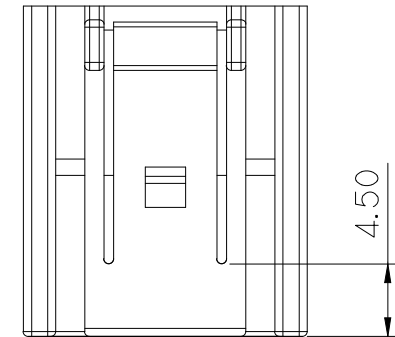


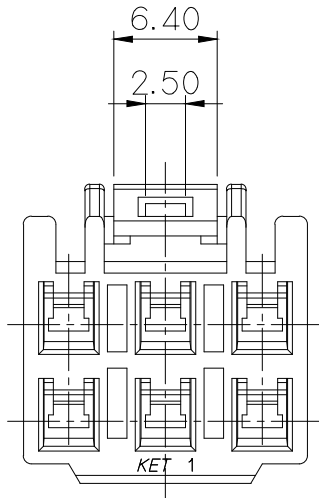

SECTION A-A

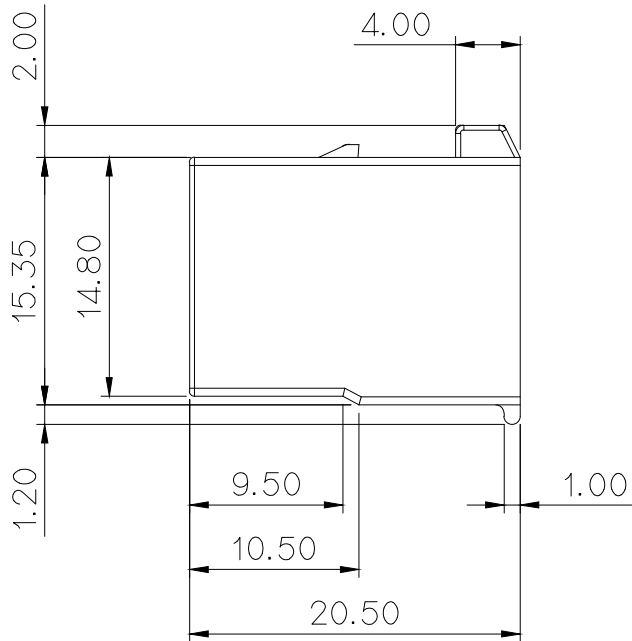

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
3. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE TERMINAL : 730675, 676, 677
5. KET MARK : TAPER 15° (H; 0.1~0.2, SIZE; 1.5)
CAVITY NO. : TAPER 0°(H; 0.1~0.2, SIZE; 1.5)

주 기

- 1.지시하지 않은 반경 R은 0.3으로 한다.
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을 것.
4. 적용 TERMINAL : 730675, 676, 677
- 5.KET 문자 : 기울기 15°(H; 0.1~0.2, SIZE; 1.5)
CAVITY NO.: 기울기 0°(H; 0.1~0.2, SIZE; 1.5)



ISSUE MARK

						MATERIAL		PBT	 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH		NATURAL			
						WIRE RANGE		CLASS		090II	
						INSULATION		TYPE			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG613760
DR.	H.E.M	'06.12.19	CHK.				PART NAME				
CHK.	---	'06.12.19	APP.			---	'06.12.19				
090II 6F HOUSING (SINGLE LOCK)											