
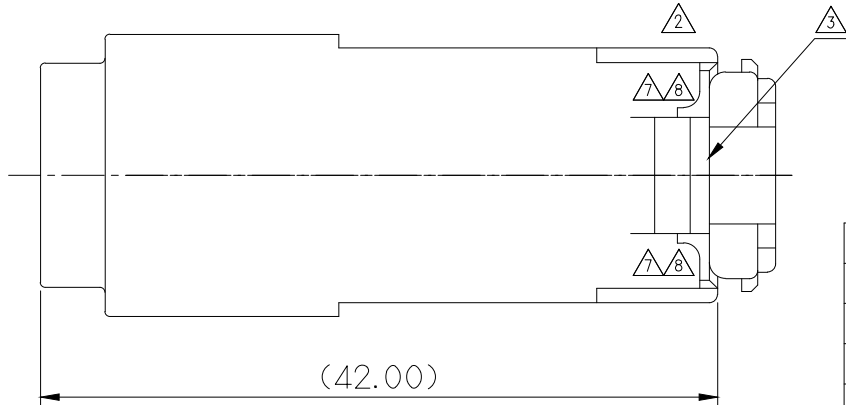
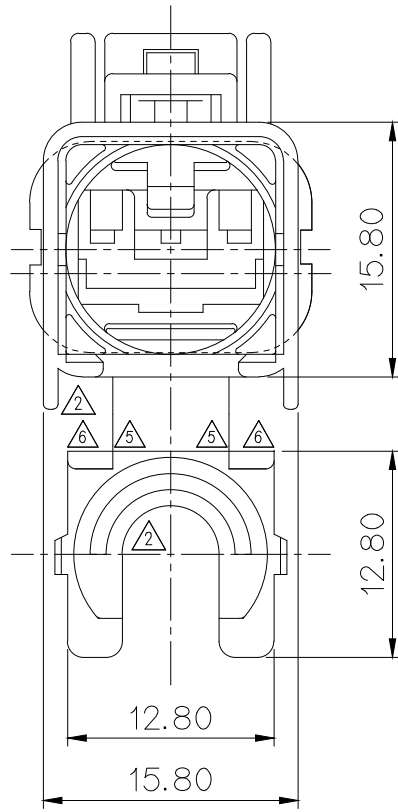
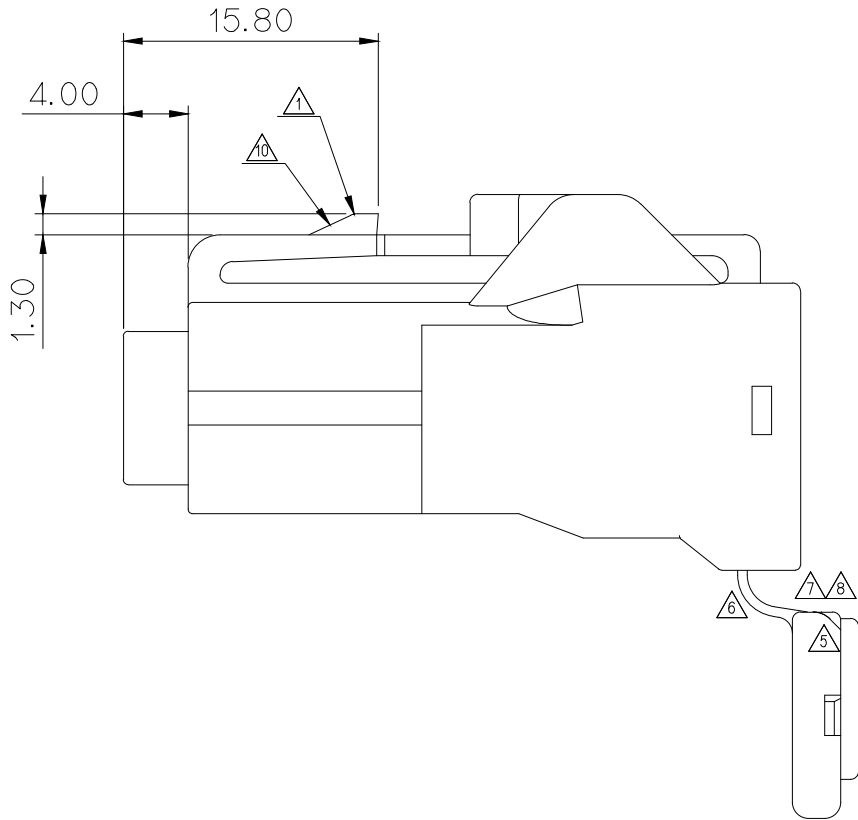
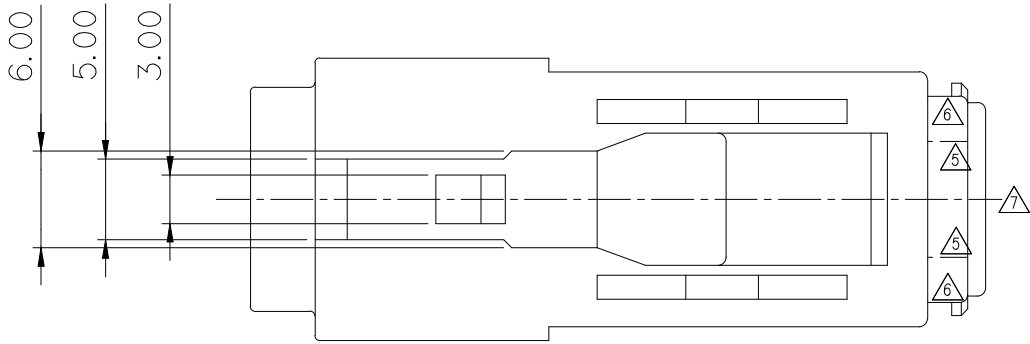


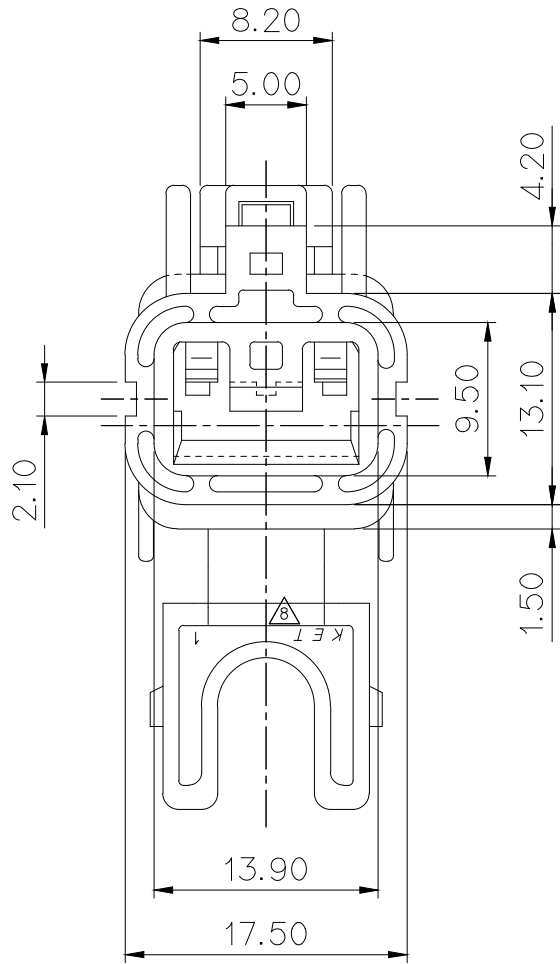

	NO.	MATERIAL	COLOR
△4*	0	P B T	NATURAL
	1		RED
	2		BLUE
	20		JADE
	3		YELLOW
△6*	4		GRAY
△△	40		DARK GRAY
	41		LIGHT GRAY
*	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

△△	ECO-2101-193	근거 도면 변경	STJ	KSC	CJH	'21.01.25
△△	ECO-2007-088	근거 도면 변경	SKM	HYJ	CJH	'20.07.07
△△	ECO-2003-317	근거 도면 변경 (WIRE SEAL 사항 추가)	SY.L	HYJ	CJH	'20.03.23

△8	ECO-1606-044 근거 도면 변경 (힌지 부 형상 변경)	KJS	CKY	LSY	'16.06.08	
△7	ECO-1604-128 근거 도면 변경 (힌지 부 형상 변경)	KJS	-	LSY	'16.04.08	
△6	ECO-1509-165 근거 도면 변경 (힌지 부 두께 축소 및 길이 증대)	KJS	AJH	LSY	'15.09.14	
△5	ECO-1509-003 근거 도면 변경 (R/H 하단 부 C 형상 추가)	KJS	CKY	LSY	'15.09.02	
△4	ECO-1507-026 근거 도면 재작성	SY.L	CKY	LSY	'15.07.03	
△3	ECO-1404-093 근거 도면 재작성	KJY	CSH	CWK	HJB	'14.04.11
△2	설계사양변경(S080130)근거 도면 재작성 (HINGE 부 형상개선 및 살빼기 추가)	KMH	HSH	KKJ	'08.06.04	
△1	설계사양변경(S070164)근거 도면 재작성 (LOCK부 "R" 추가)	KBS	HSH	KKJ	'07.07.23	
LTR	REVISION RECORD	DR.	CHK.	CHK.	APP.	DATE
DR.	KBS 2007.01.30	CHK.	HSH	2/6		
CHK.	—	APP.	KKJ	2/6		

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 지시하지 않은 반경 R은 0.5로 한다.
- 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 적용 TERMINAL : ST730722-3
적용 HOUSING : MG643800, MG643800-40, MG644800-5
적용 WIRE SEAL : MG683802, △MG685635
- △ 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730722-3
APPLICABLE HOUSING : MG643800, MG643800-40, MG644800-5
APPLICABLE WIRE SEAL : MG683802, △MG685635
- △ 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2021-10-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

MATERIAL △SEE TABLE
FINISH △SEE TABLE

WIRE RANGE -

CLASS 375 WP

INSULATION -

TYPE 7123-4210-30

TOLERANCE
EXCEPT
AS NOTED
SEE TABLE

SCALE
2/1

PART NO.
MG613801

PART NAME
375 WP 1F HOUSING