



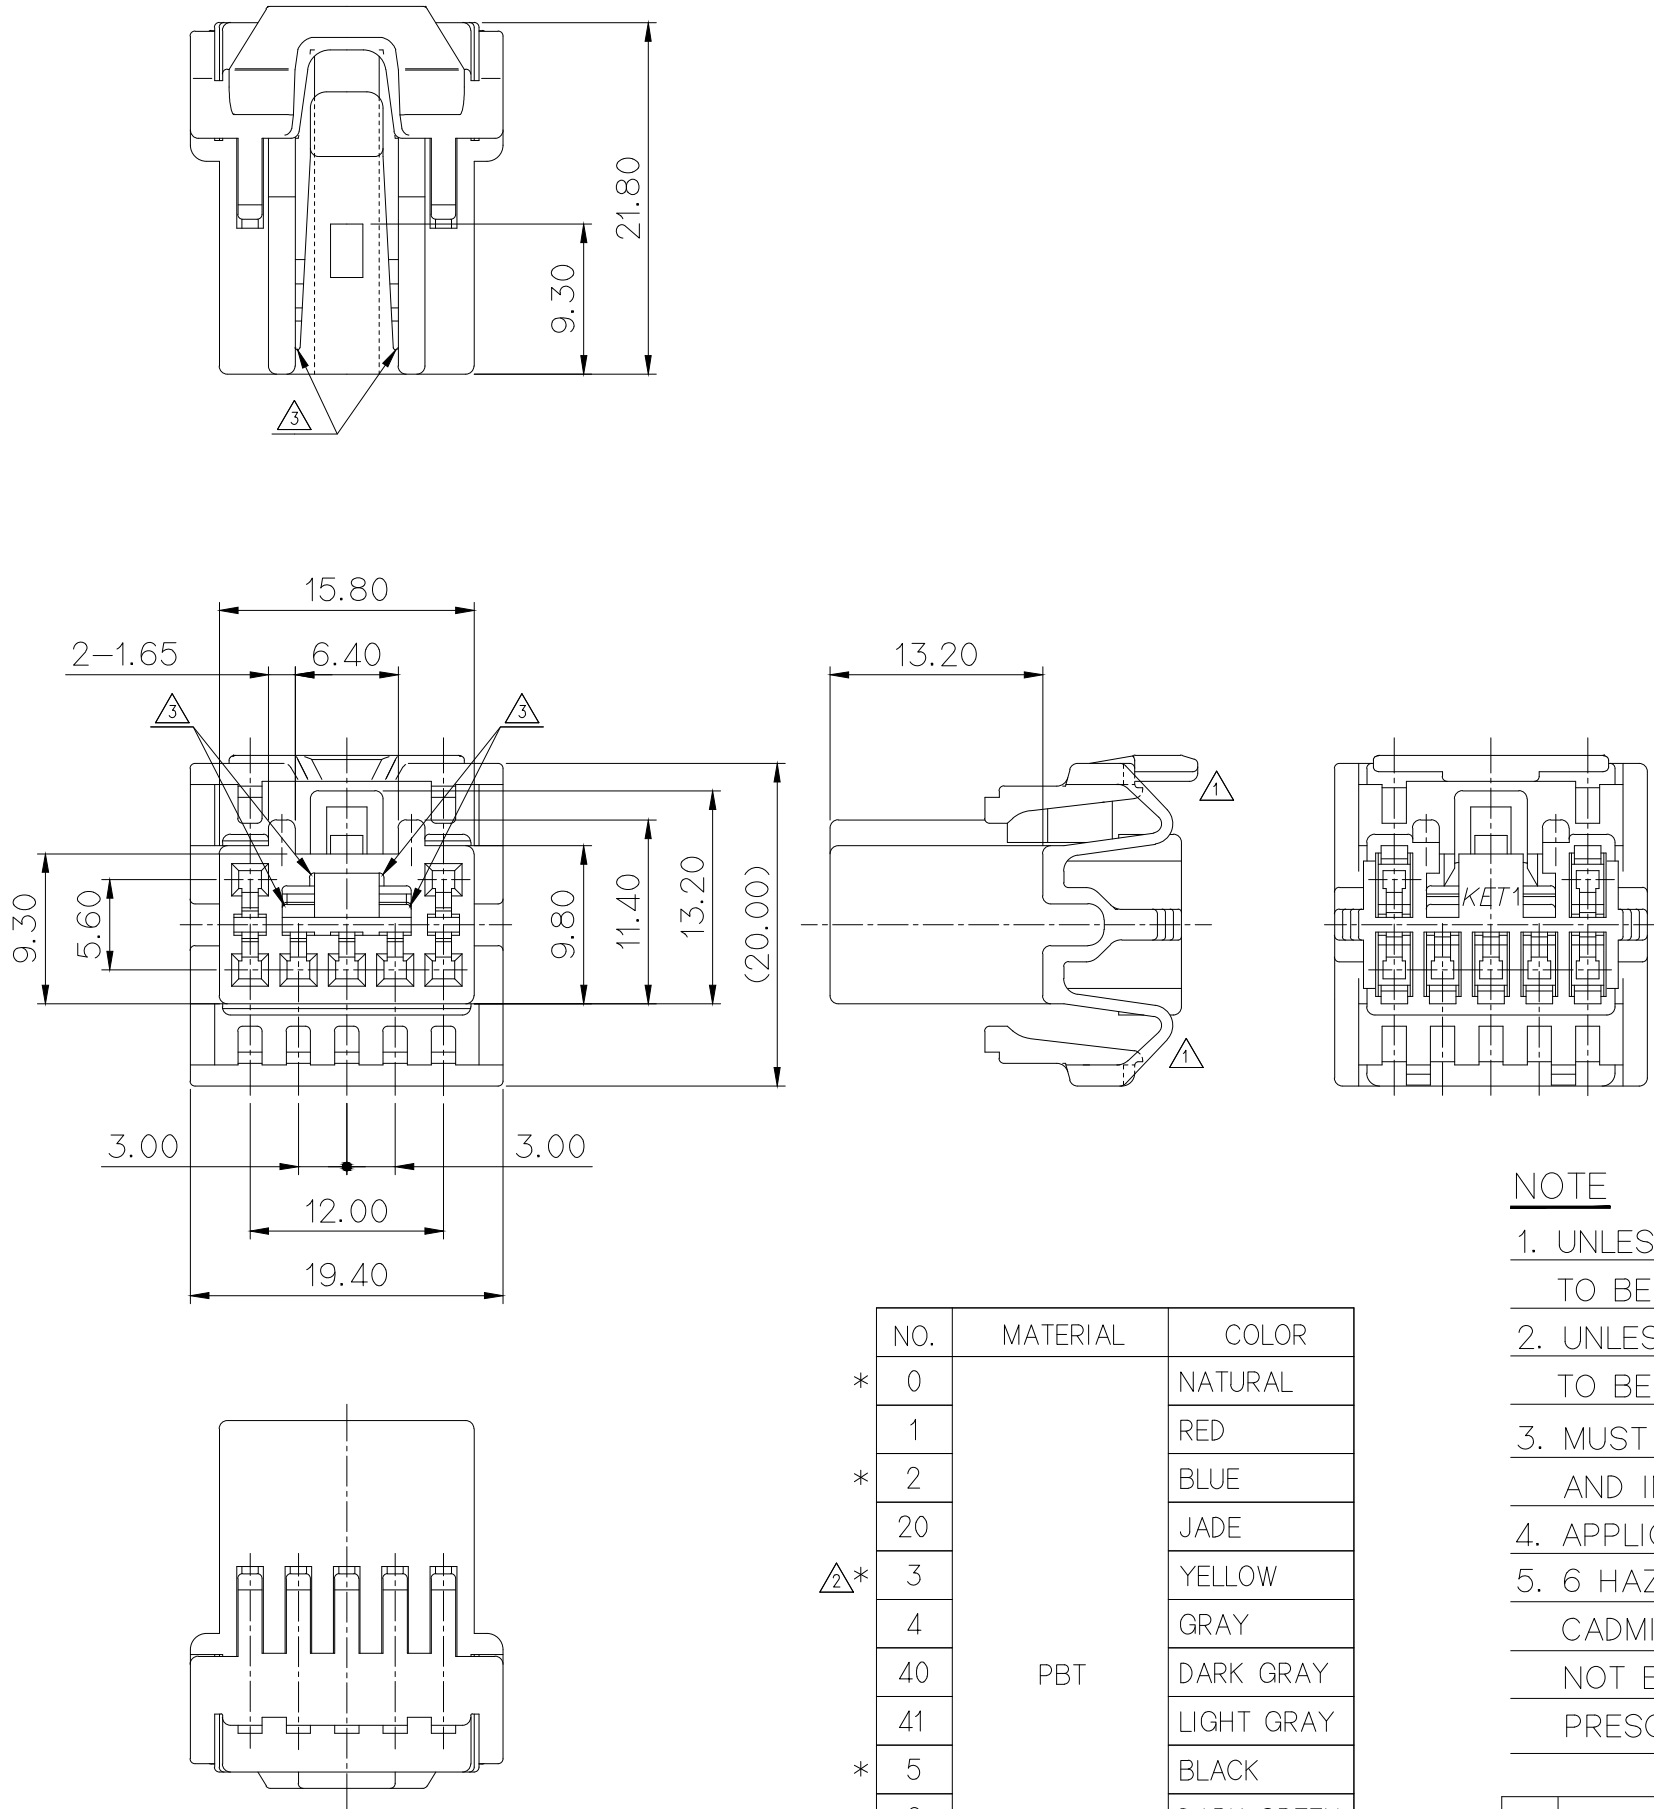

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

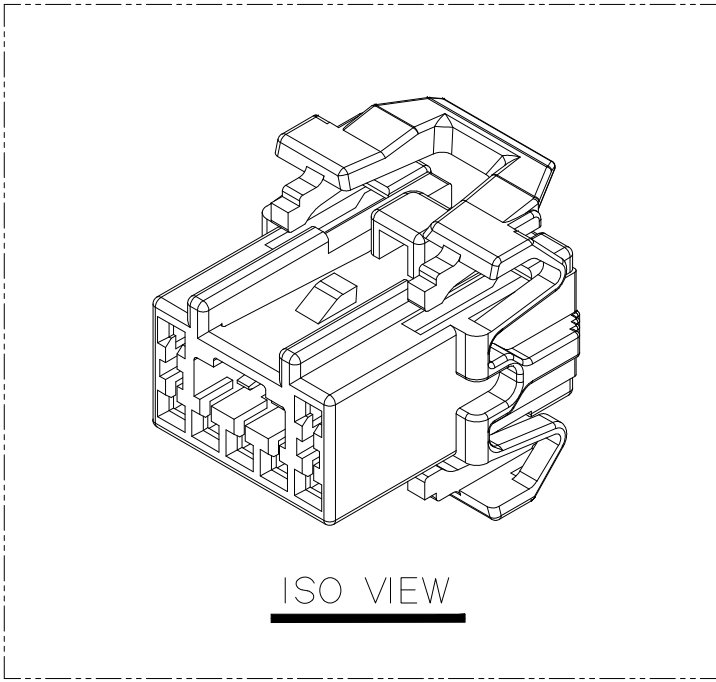


주 기

- 지시하지 않은 반경 R은 0.3으로 한다.
- 지시하지 않은 모따기 C는 0.3으로 한다.
- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST730751-3, ST731008-3
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
- UNLESS OTHERWISE SPECIFIED ALL CHAMFER TO BE 0.3 CHAMFER.
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730751-3, ST731008-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH SEE TABLE				
3	ECO-2105-132 근거 도면 제작성	KJH	HYJ	CJH	21.05.13	WIRE RANGE		—	CLASS	050
2	ECO-2103-087 근거 도면 제작성	KJH	HYJ	CJH	21.03.05	INSULATION		—	TYPE	비방수
1	설계사양변경(S080142)근거 도면 수정	CDH	KKJ	KKJ	08.06.18	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO. MG614010	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE					
DR. KMH 08.05.30		CHK. HSH 08.06.02				PART NAME 050 7F HOUSING				
CHK.		APP. KKJ 08.06.02								

ISSUE MARK