


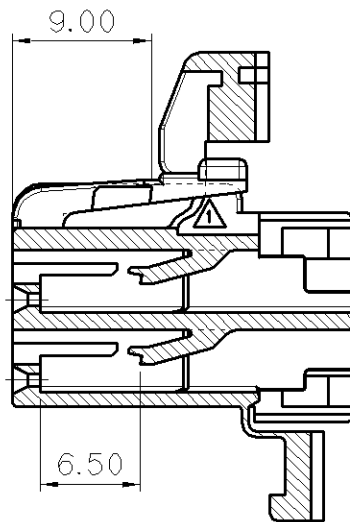
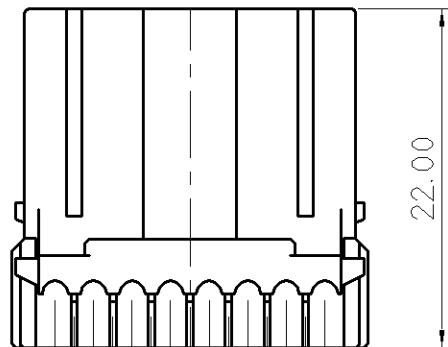
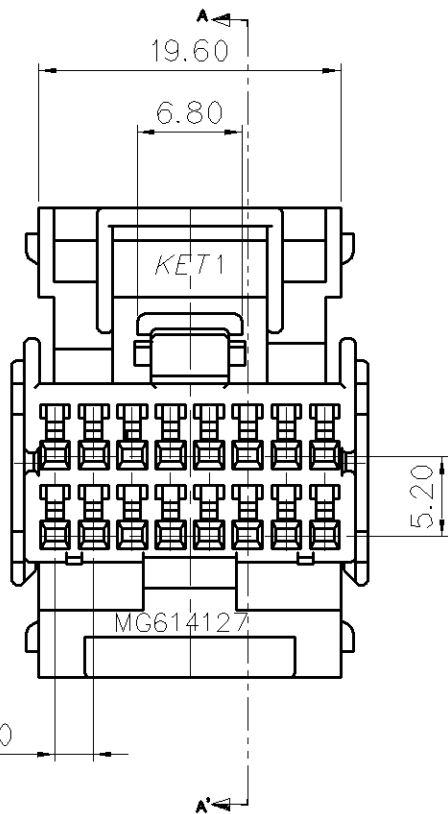
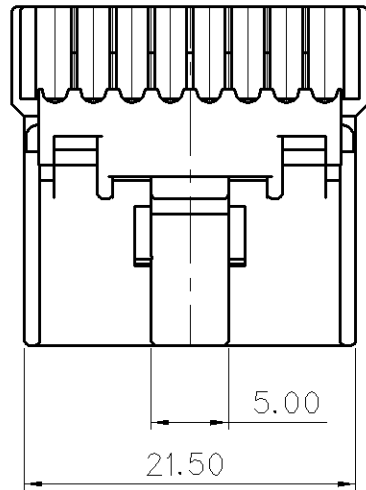


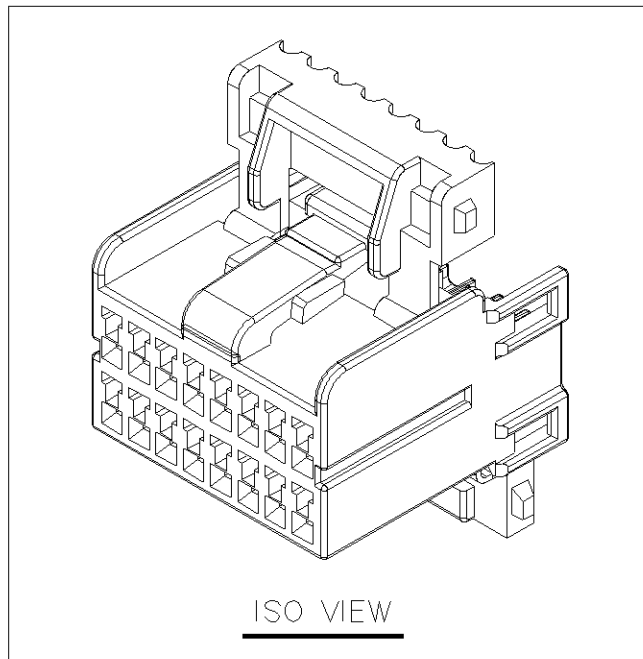

SECTION A-A'

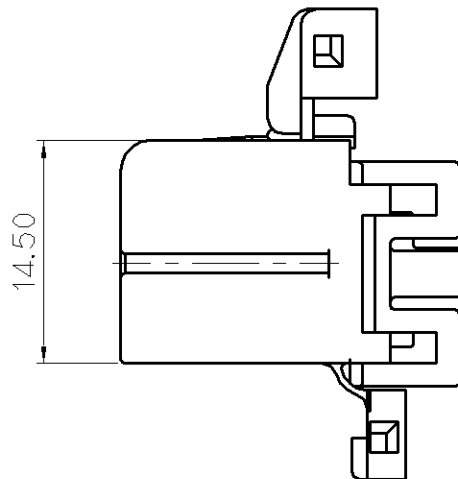

ISO VIEW

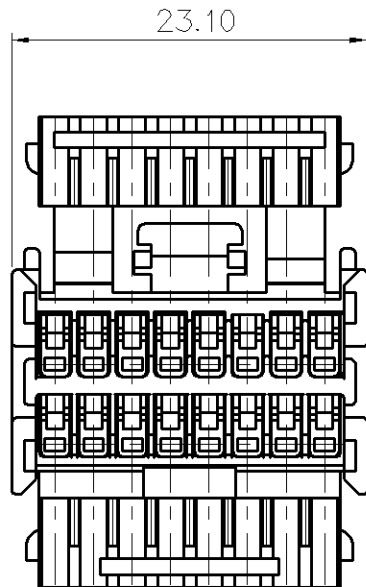

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1.제품기능상 유해한 BURR,변형 및 WELDLINE 없을것.
- 2.지시하지 않은 반경 R은 0.3으로 한다.
- 3.지시하지 않은 모따기 C는 0.3으로 한다.
- 4.적용 HOUSING : MG644125
5. APPLICABLE TERMINAL : ST731078-3
- 6.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
3. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3CHAMFER.
4. APPLICABLE HOUSING : MG644125
- 5.적용TERMINAL: ST731078-3
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

					MATERIAL	PBT	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	BLACK		
					WIRE RANGE	CLASS		
					INSULATION	TYPE		
	설계사양변경(S100277)근거 수정	LHS		10.11.03				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG614127
DR.	CDH 2010. 01. 18	CHK.			1/18	PART NAME 040II 16F HOUSING (B-TYPE)		
CHK.		APP.			1/18			