

GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

PART NO.


MG614329

- 주 기
1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.

2.적용 TERMINAL : ST730677, 1046, 1047 1108
ST731148, 1149, 1150, 1151

적용 CONNECTOR : MG624330

3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.




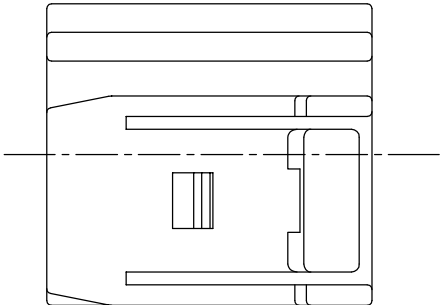


- NOTE
1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE TERMINAL :ST730677, 1046, 1047, 1108
ST731148, 1149, 1150, 1151

APPLICABLE CONNECTOR : MG624330

3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

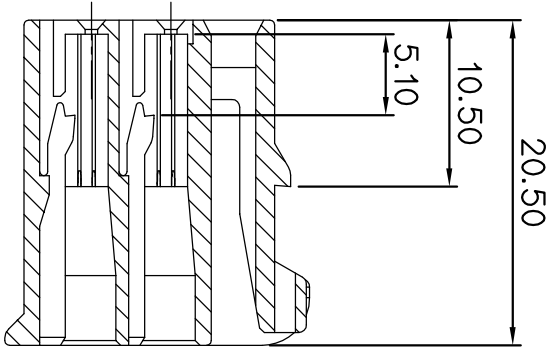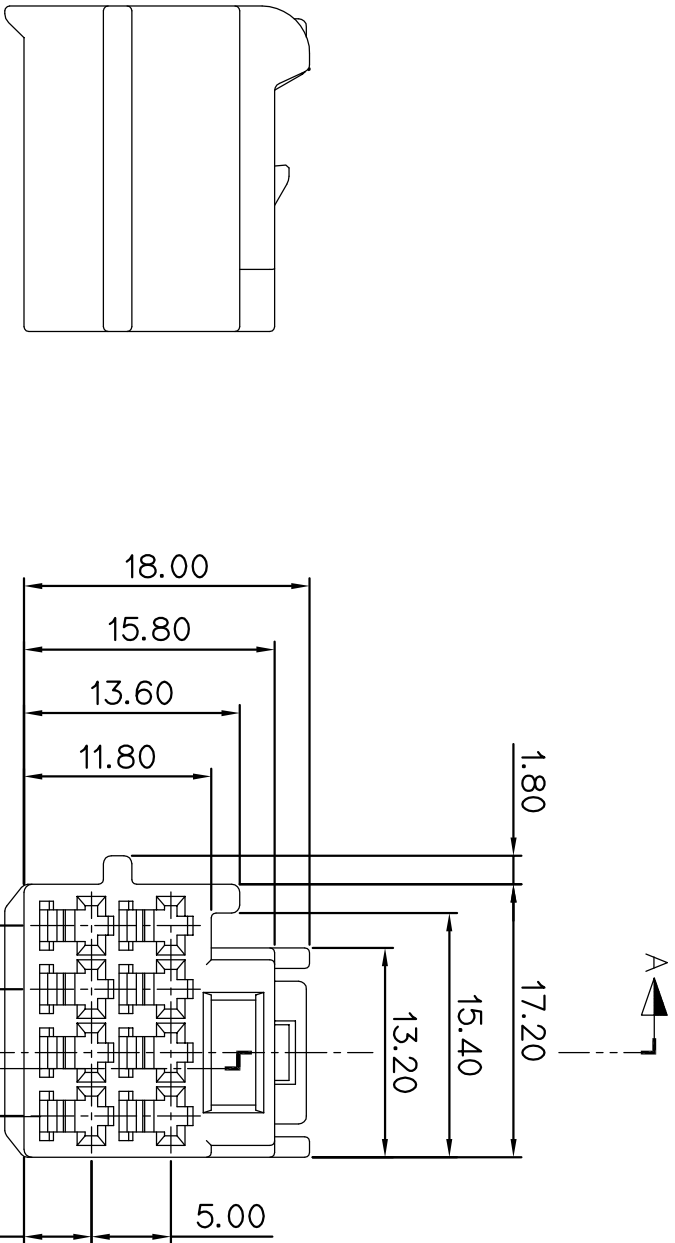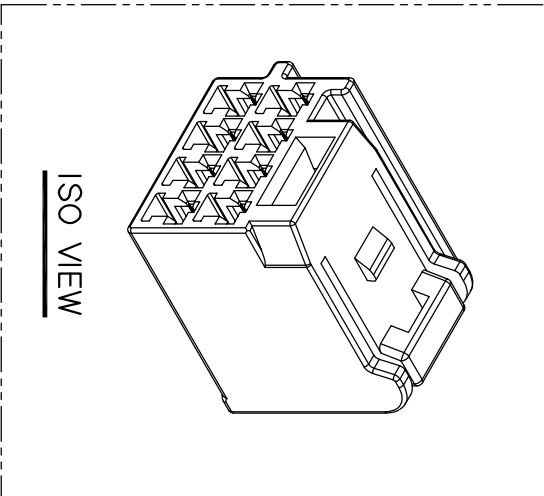

SECTION A-A

ISSUE MARK

						MATERIAL	PBT	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	NATURAL		
						WIRE RANGE	CLASS		
						INSULATION	TYPE		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		SCALE	PART NO.
DR.	CDH	10.05.27	CHK.	APP.		SEE TABLE		2/1	MG614329
CHK.						PART NAME		090 DTC 8F HOUSING	