




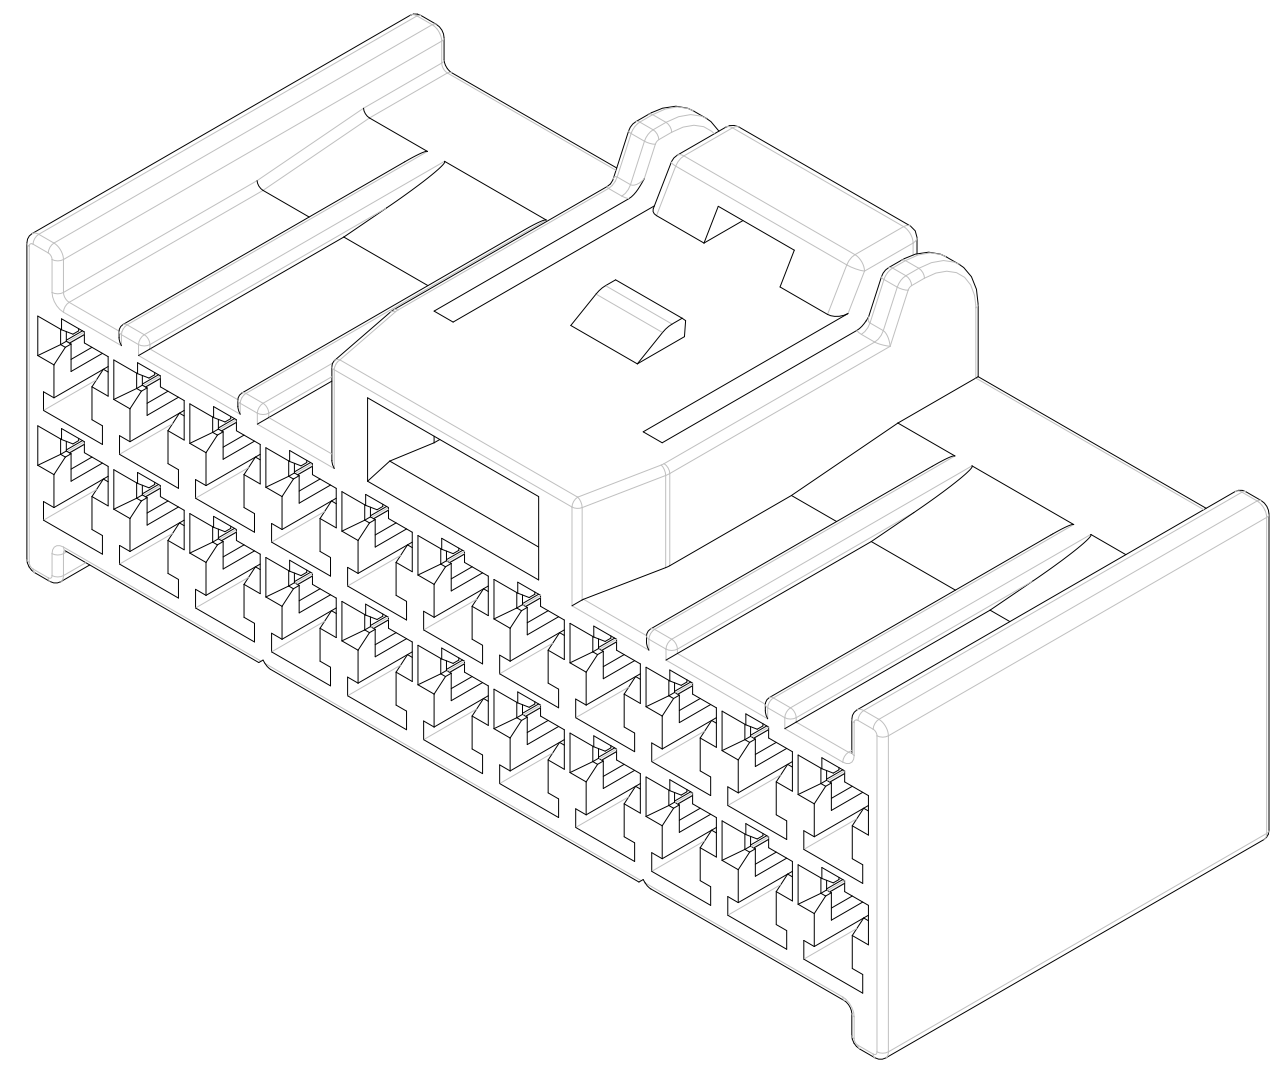

ISO VIEW

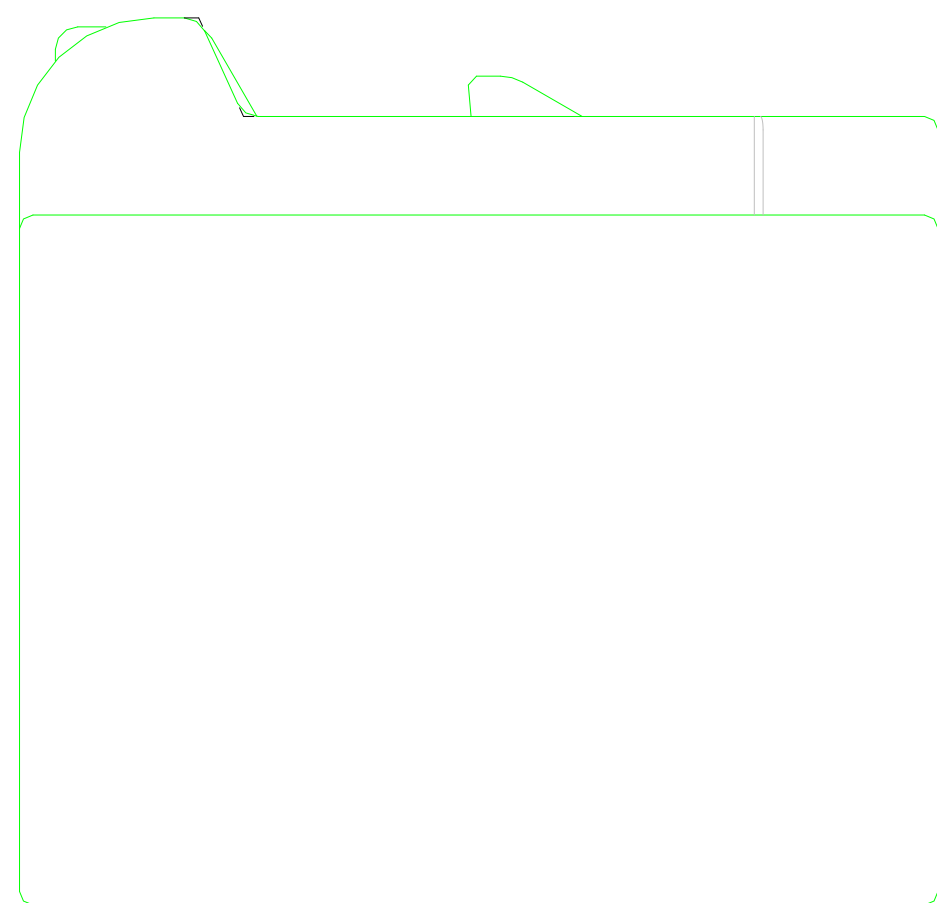

090 Pitch 5.00

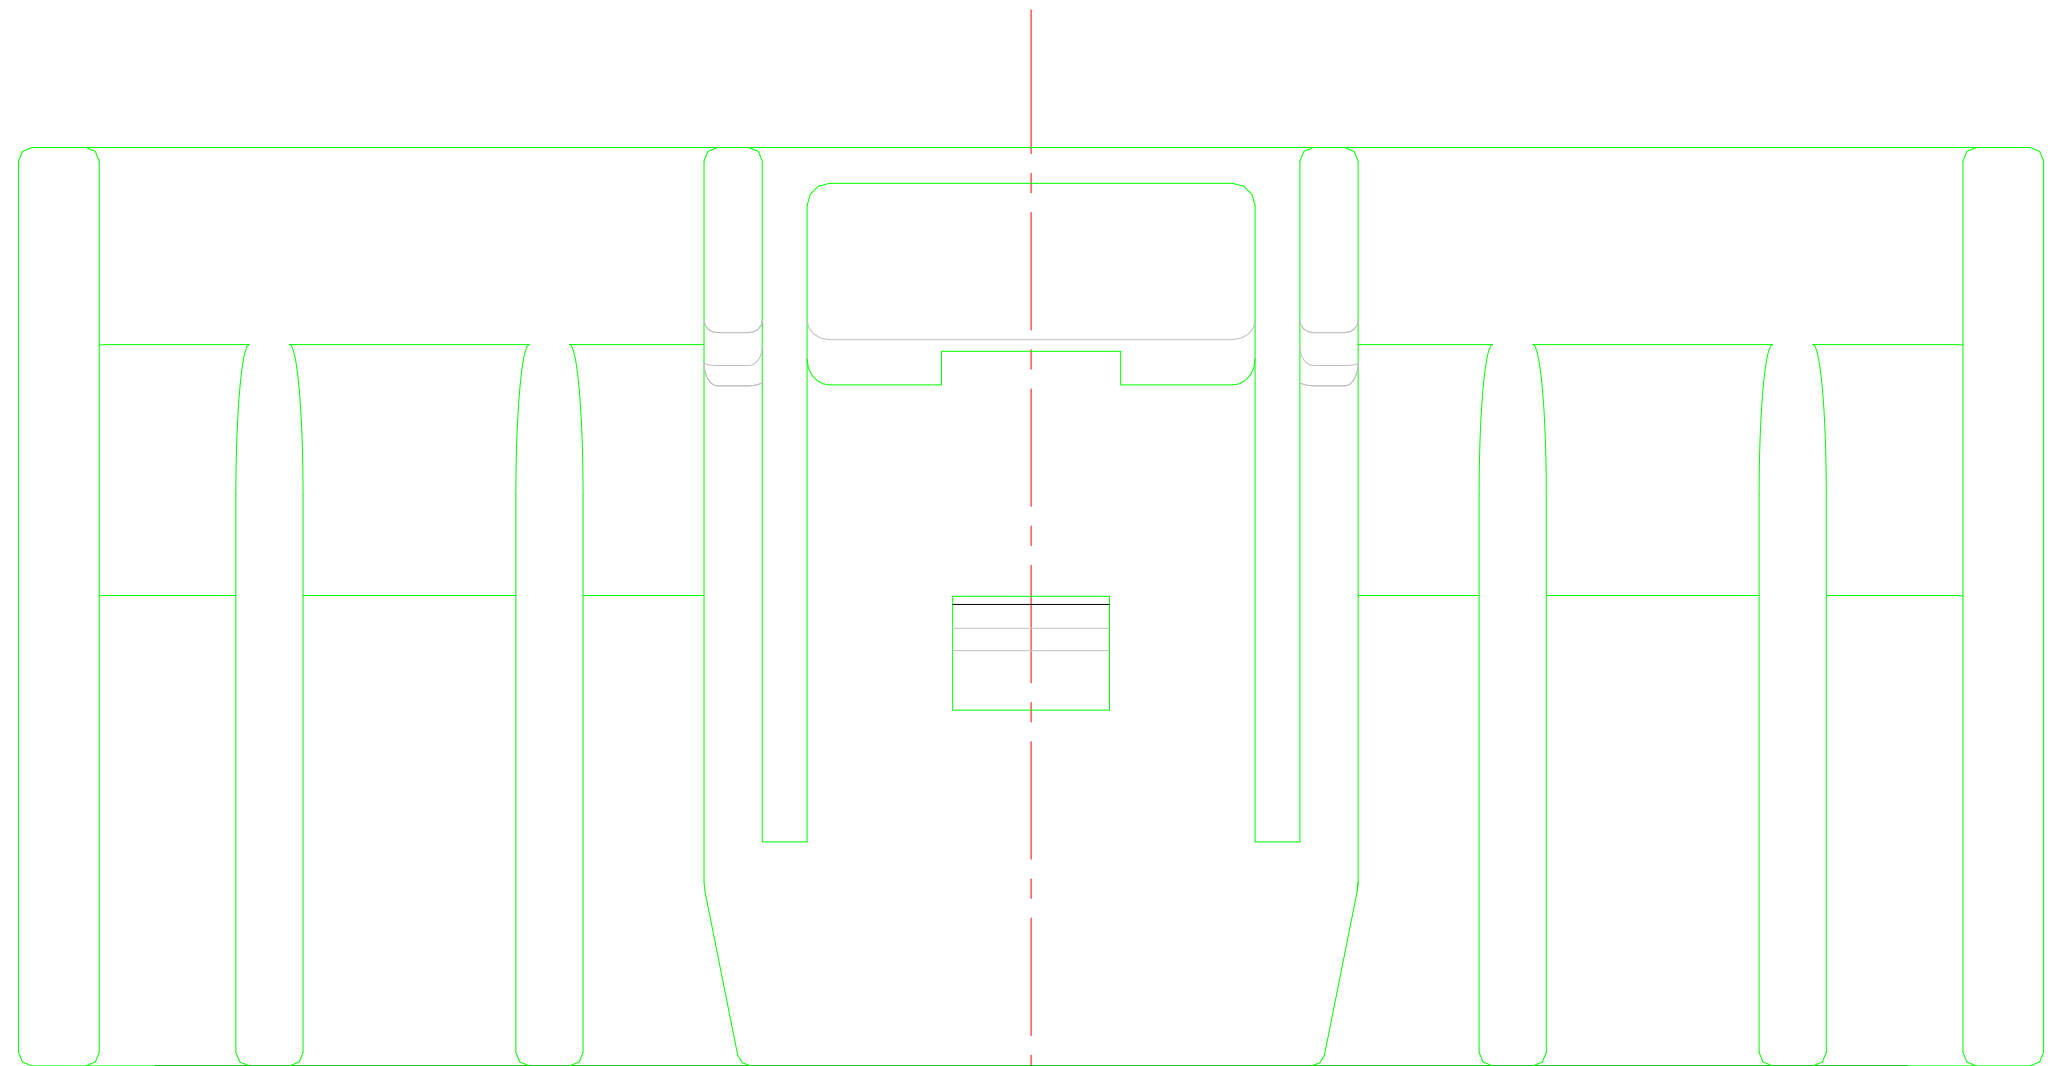

A



45.20

11.80

15.40

090 Pitch 5.00

A

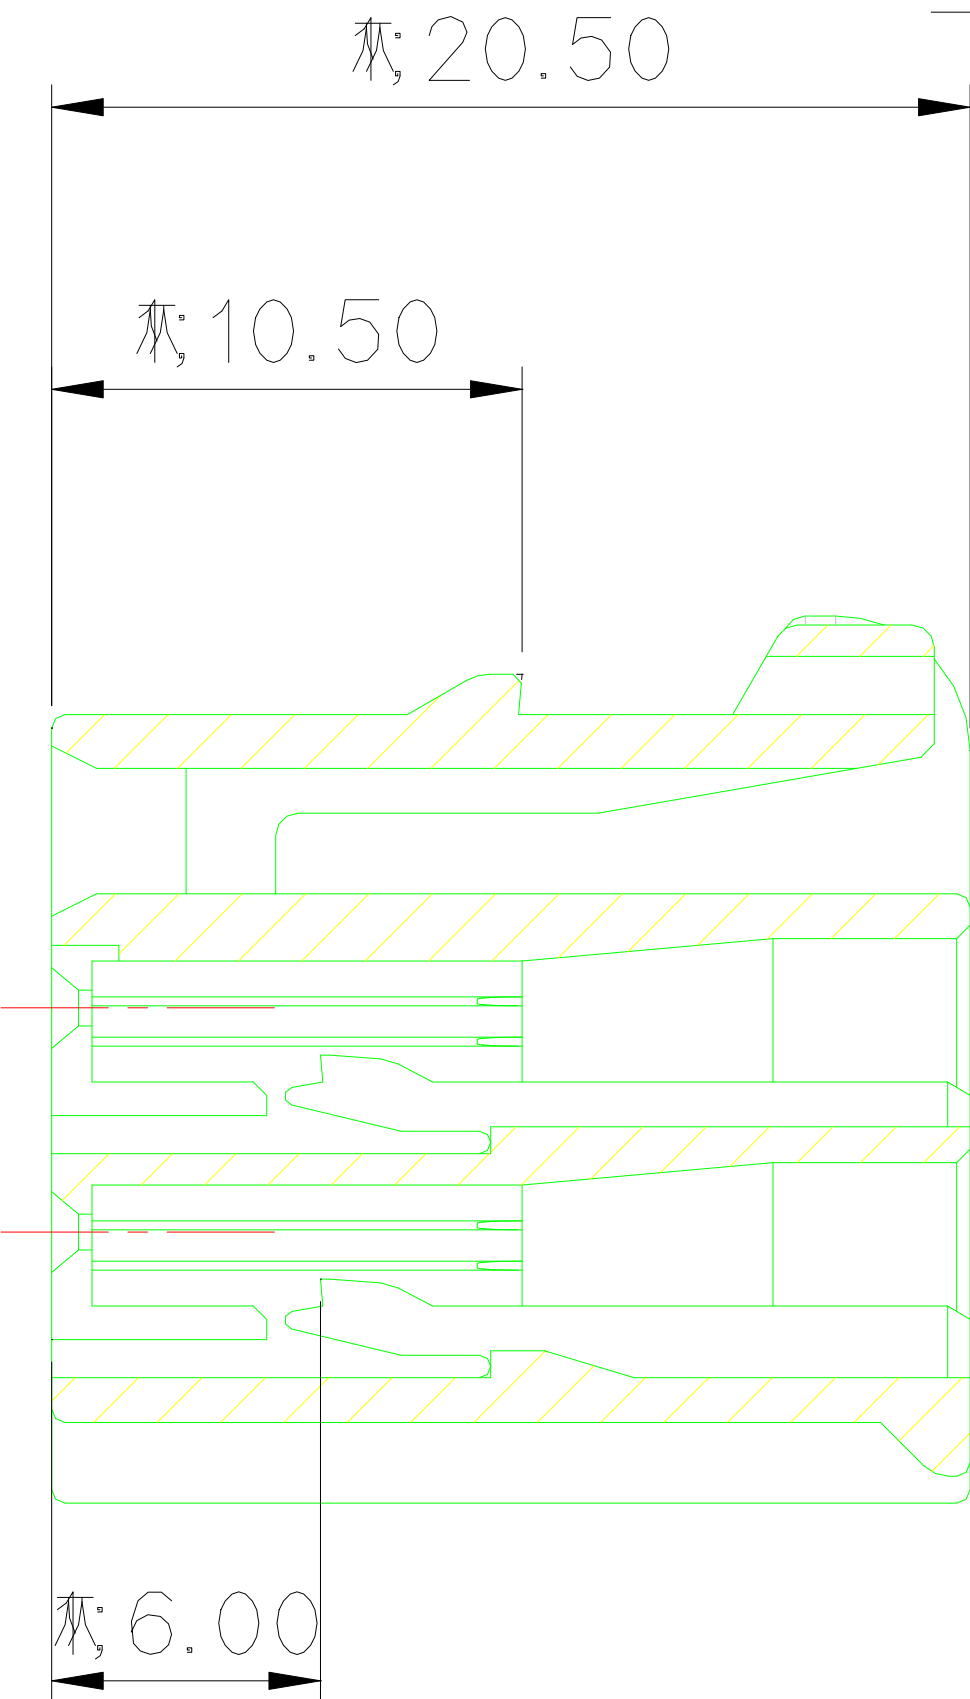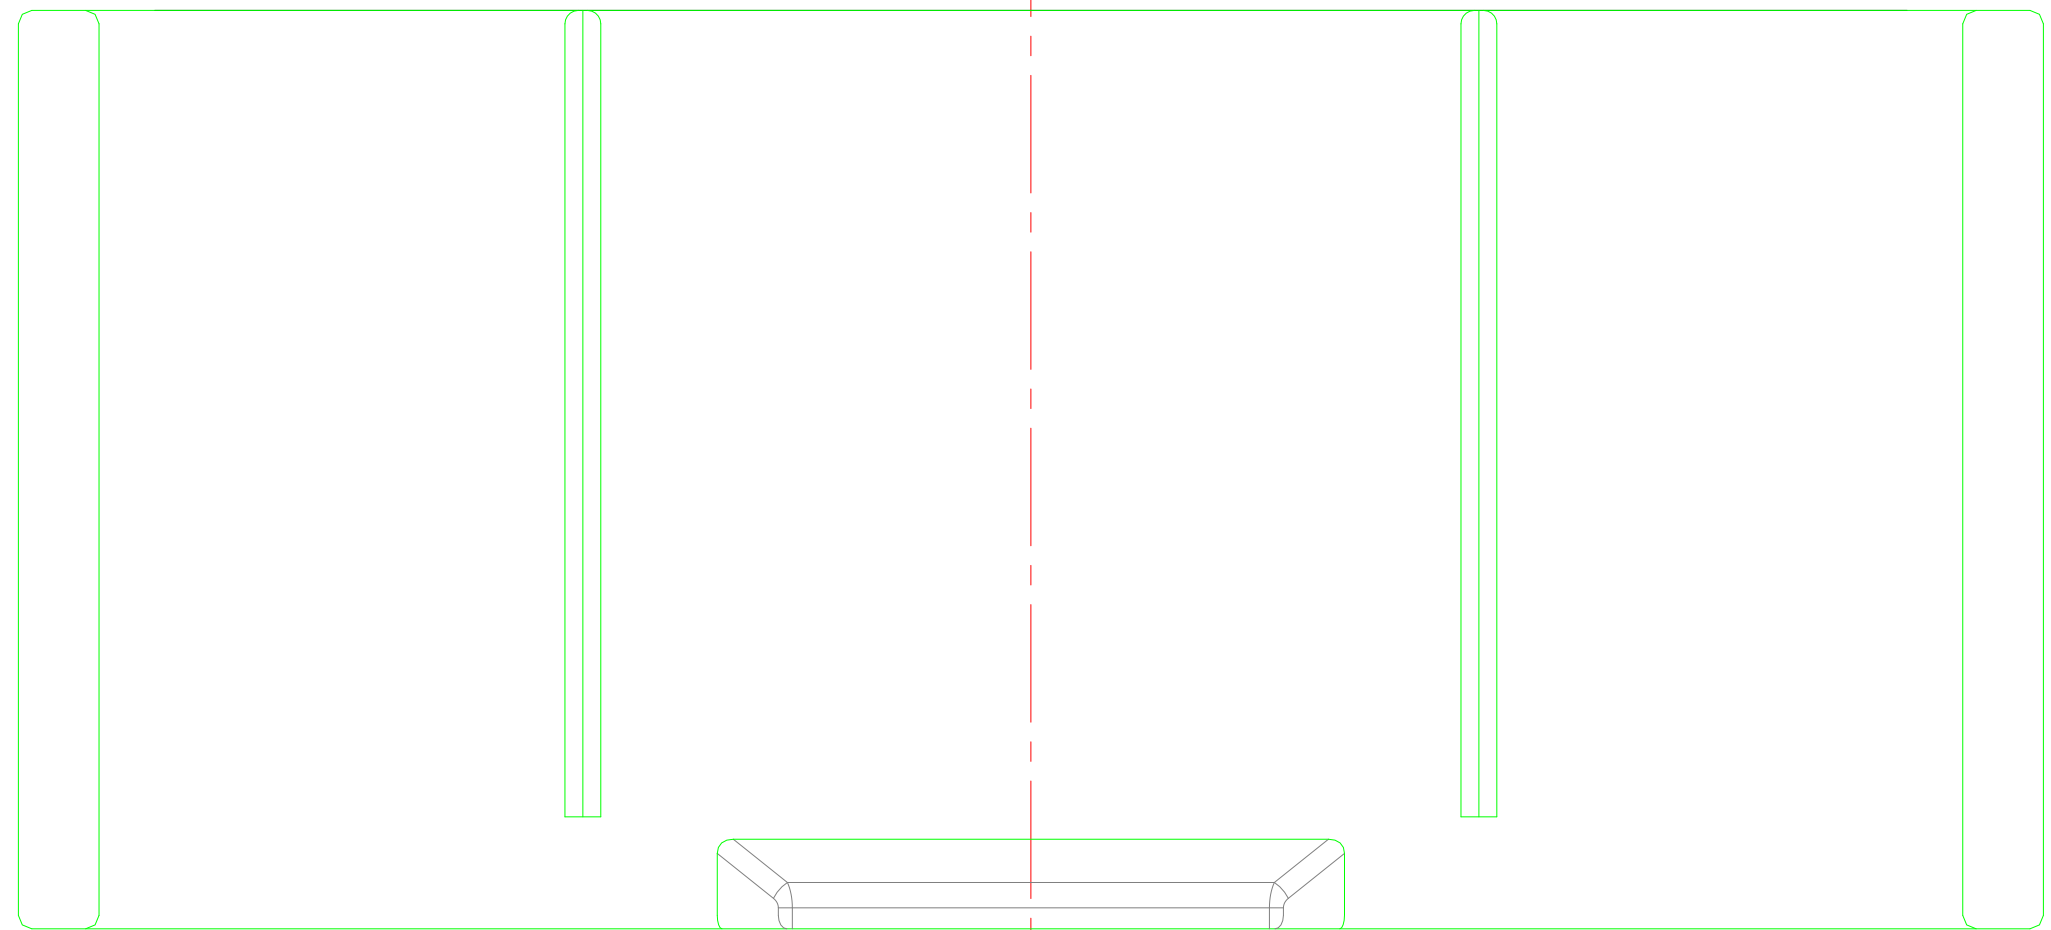


20.50

10.50

6.00

SECTION A-A

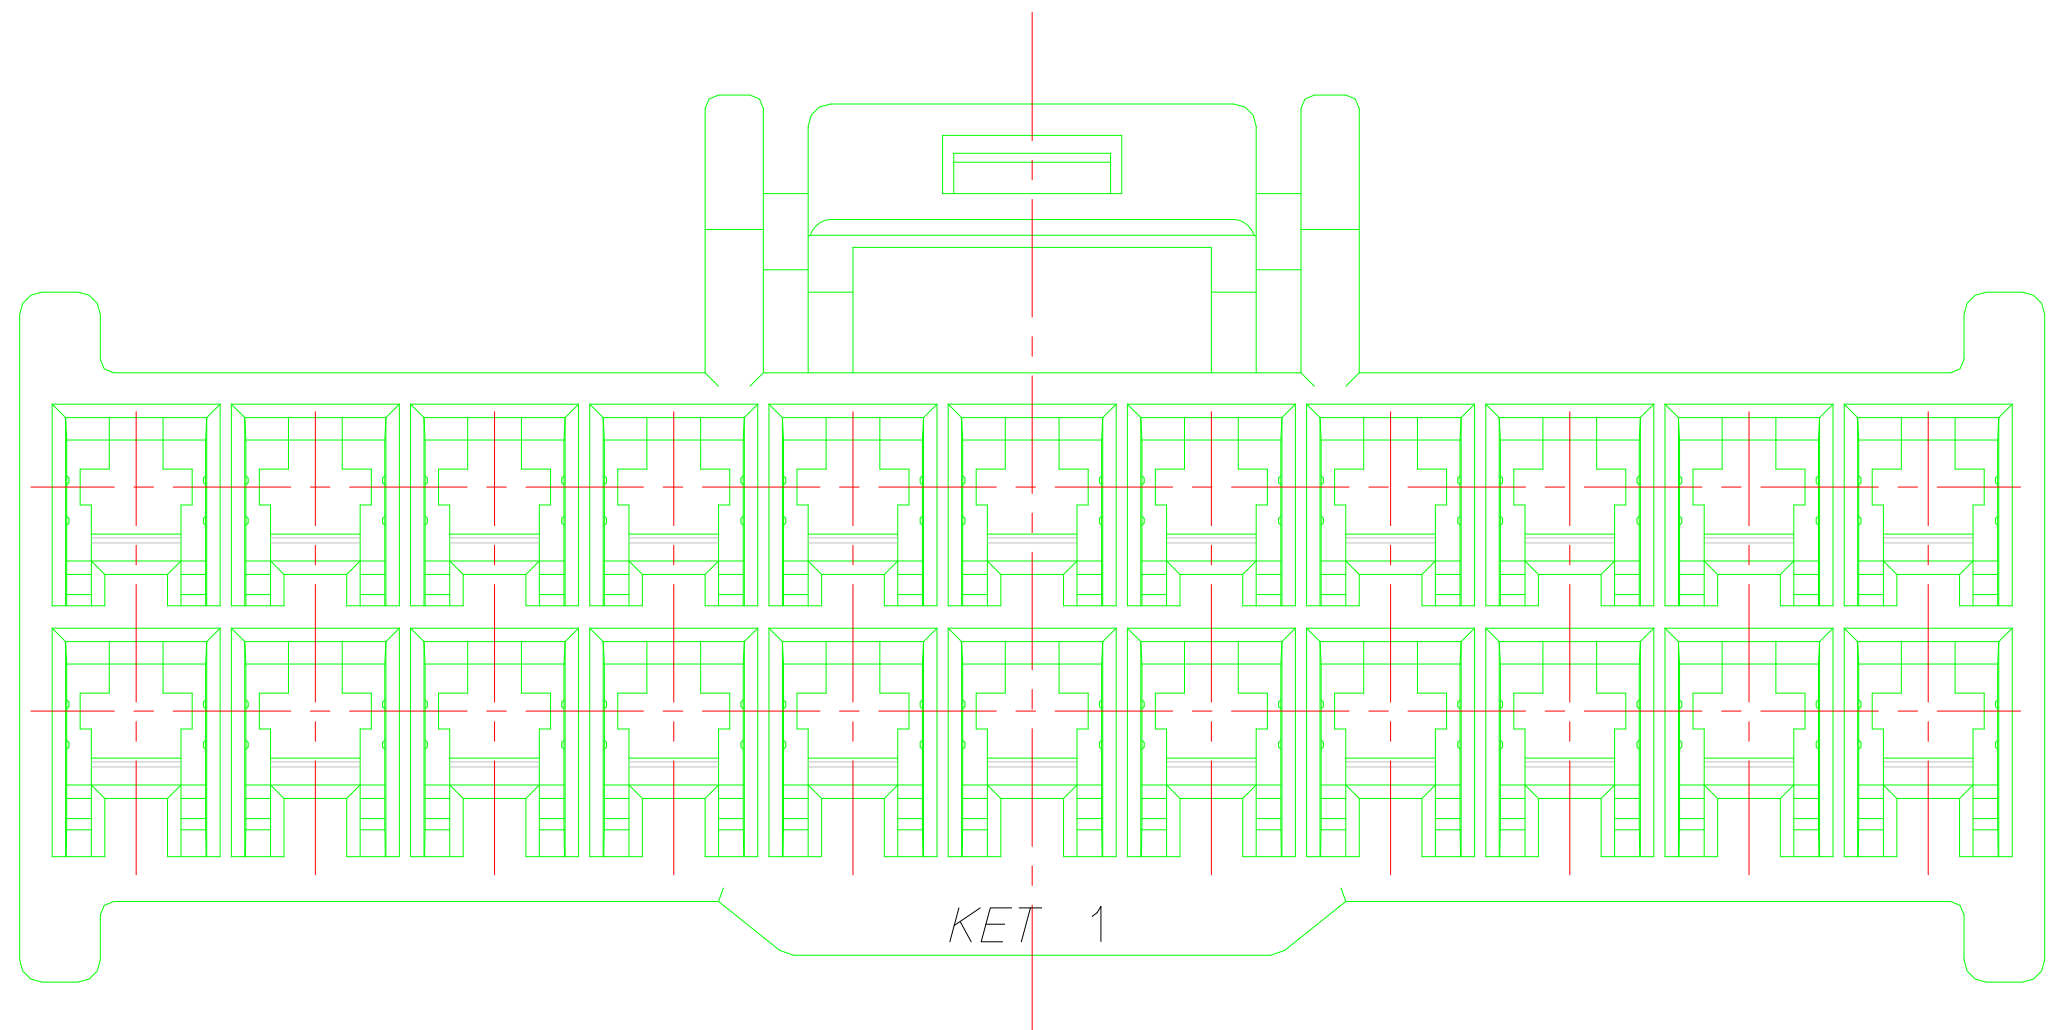

KET 1

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST731148, 1149, 1150, 1151
APPLICABLE CONNECTOR : MG624344
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 TERMINAL : ST731148, 1149, 1150, 1151
적용 CONNECTOR : MG624344
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK

						MATERIAL	PBT		KOREA ELECTRIC	
						FINISH	NATURAL		TERMINAL CO., L	
						WIRE RANGE			CLASS	090
						INSULATION			TYPE	090 DTC
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.	
	DR.	CDH	10.05.27	CHK.			SEE TABLE	2/1	MG614343	
CHK.			APP.				PART NAME			
							090 DTC 22F HOUSING			